

Positive Voltage Regulators

■ GENERAL DESCRIPTION

The XC6201 series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies.

The series provides large currents with a significantly small dropout voltage.

The XC6201 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error amplifier. Output voltage is selectable in 0.1V steps between 1.3V ~ 6.0V.

SOT-25, SOT-89, USP-6B and TO-92 packages are available.


■ APPLICATIONS

- Mobile Phones
- Cordless phones, wireless communication equipment
- Cameras, video recorders
- Portable games
- Portable AV equipment
- Reference voltage
- Battery powered equipment

■ FEATURES


Maximum Output Current	: 250mA (TYP.)
Dropout Voltage	: 0.16V @ 100mA : 0.40V @ 200mA
Maximum Operating Voltage	: 10V
Output Voltage Range	: 1.3V ~ 6.0V (0.1V increments)
Fixed Voltage Accuracy	: $\pm 1\%$ ($V_{OUT(T)} \geq 2.0V$) $\pm 2\%$
Low Power Consumption	: $2.0 \mu A$ (TYP.)
Operational Temperature Range	: -40°C ~ 85°C
Packages	: SOT-25, SOT-89 TO-92 USP-6B
Environmentally Friendly	: EU RoHS Compliant, Pb Free
Tantalum or Ceramic Capacitor compatible	

■ TYPICAL APPLICATION CIRCUIT

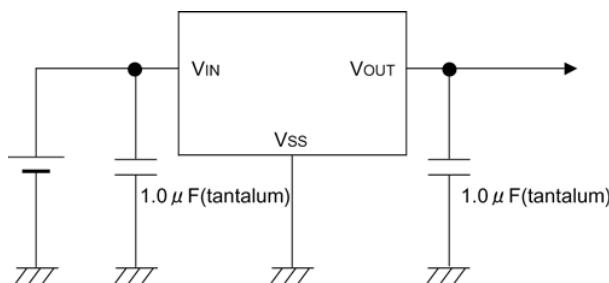


■ TYPICAL PERFORMANCE CHARACTERISTICS

- Supply Current vs. Input Voltage

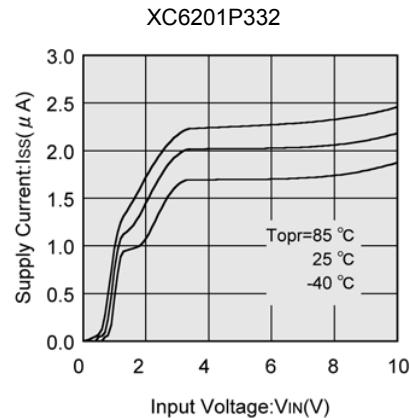

■ PIN CONFIGURATION

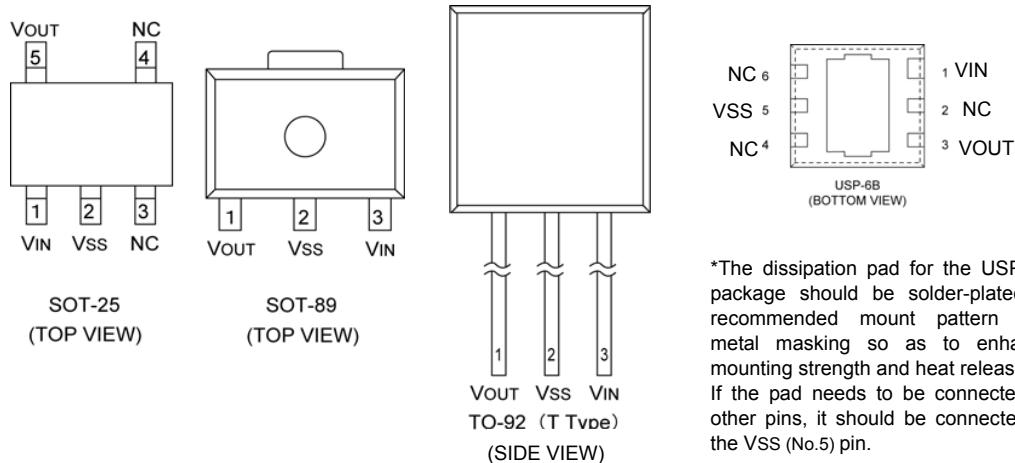

*The dissipation pad for the USP-6B package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the VSS (No.5) pin.

■ PIN ASSIGNMENT

PIN NUMBER			PIN NAME	FUNCTION
SOT-25	SOT-89/TO-92 (T)	USP-6B		
5	1	3	VOUT	Output
2	2	5	Vss	Ground
1	3	1	VIN	Power Input
3, 4	—	2,4,6	NC	No Connection

■ PRODUCT CLASSIFICATION

● Ordering Information

X C 6 2 0 1 P ③④⑤⑥⑦-⑧^(*)

↑
① ②


DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION
①	Product Number	01	-
②	Type of Regulator	P	3-pin regulator
③④	Output Voltage	13~60	e.g. 30:3.0V 50:5.0V
⑤	Output Voltage Accuracy	1	±1%
		2	±2%
⑥⑦-⑧	Packages Taping Type ^(*)	MR	SOT-25
		MR-G	SOT-25
		PR	SOT-89
		PR-G	SOT-89
		TH	TO-92 Taping Type: Paper type
		TH-G	TO-92 Taping Type: Paper type
		TB	TO-92 Taping Type: Bag
		TB-G	TO-92 Taping Type: Bag
		DR	USP-6B
		DR-G	USP-6B

* ±1% accuracy can be set at $V_{OUT(T)} \geq 2.0V$.

(*) The “-G” suffix indicates that the products are Halogen and Antimony free as well as being fully RoHS compliant.

(*) The device orientation is fixed in its embossed tape pocket. For reverse orientation, please contact your local Torex sales office or representative. (Standard orientation: ⑥R-⑧, Reverse orientation: ⑥L-⑧)

■ BLOCK DIAGRAM

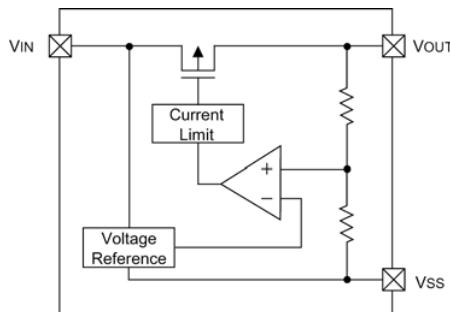

■ ABSOLUTE MAXIMUM RATINGS

 $T_a = 25^\circ\text{C}$

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	V _{IN}	12.0	V
Output Current	I _{OUT}	500	mA
Output Voltage	V _{OUT}	V _{SS} -0.3~V _{IN} +0.3	V
Power Dissipation	SOT-25	P _d	mW
	SOT-89		
	TO-92		
	USP-6B		
Operating Temperature Range	T _{opr}	-40~+85	°C
Storage Temperature Range	T _{stg}	-55~+125	°C

■ ELECTRICAL CHARACTERISTICS

XC6201P132 $V_{OUT(T)}=1.3\text{V}$ (*1) $T_a=25^\circ\text{C}$

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} (*2)	$V_{IN}=2.3\text{V}$ $I_{OUT}=10\text{mA}$	1.274	1.300	1.326	V	②
Maximum Output Current	I _{OUTmax}	$V_{IN}=2.3\text{V}$ $V_{OUT(E)} \geq 1.17\text{V}$	60	-	-	mA	②
Load Regulation	ΔV_{OUT}	$V_{IN}=2.3\text{V}$ $1\text{mA} \leq I_{OUT} \leq 30\text{mA}$	-	10	30	mV	②
Dropout Voltage (*3)	V _{dif1}	$I_{OUT}=30\text{mA}$	-	200	600	mV	②
	V _{dif2}	$I_{OUT}=60\text{mA}$	-	500	810		
Supply Current	I _{SS}	$V_{IN}=2.3\text{V}$	-	2.0	5.0	μA	①
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot \Delta V_{OUT}}$	$I_{OUT}=10\text{mA}$ $2.3\text{V} \leq V_{IN} \leq 10.0\text{V}$	-	0.2	0.3	%/V	②
Input Voltage	V _{IN}		1.8	-	10	V	-
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot \Delta V_{OUT}}$	$I_{OUT}=40\text{mA}$ $-40^\circ\text{C} \leq T_{opr} \leq 85^\circ\text{C}$	-	±100	-	ppm/°C	②

■ ELECTRICAL CHARACTERISTICS (Continued)

XC6201P182 V_{OUT(T)}=1.8V ^{(*)1} Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} ^{(*)2}	V _{IN} =2.8V I _{OUT} =40mA	1.764	1.800	1.836	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =2.8V V _{OUT(E)} ≥1.62V	80	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =2.8V 1mA≤I _{OUT} ≤40mA	-	10	30	mV	②
Dropout Voltage ^{(*)3}	V _{dif1}	I _{OUT} =40mA	-	200	370	mV	②
	V _{dif2}	I _{OUT} =80mA	-	450	710		
Supply Current	I _{SS}	V _{IN} =2.8V	-	2.0	5.0	μA	①
Line Regulation	ΔV _{OUT} ΔV _{IN} ·ΔV _{OUT}	I _{OUT} =40mA 2.8V≤V _{IN} ≤10.0V	-	0.2	0.3	%/V	②
Input Voltage	V _{IN}		1.8	-	10	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} ΔT _{opr} ·ΔV _{OUT}	I _{OUT} =40mA -40°C≤T _{opr} ≤85°C	-	±100	-	ppm/°C	②

XC6201P272 V_{OUT(T)}=2.7V ^{(*)1} Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} ^{(*)2}	V _{IN} =3.7V I _{OUT} =40mA	2.646	2.700	2.754	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =3.7V V _{OUT(E)} ≥2.43V	100	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =3.7V 1mA≤I _{OUT} ≤60mA	-	15	40	mV	②
Dropout Voltage ^{(*)3}	V _{dif1}	I _{OUT} =60mA	-	200	370	mV	②
	V _{dif2}	I _{OUT} =120mA	-	450	710		
Supply Current	I _{SS}	V _{IN} =3.7V	-	2.0	5.0	μA	①
Line Regulation	ΔV _{OUT} ΔV _{IN} ·ΔV _{OUT}	I _{OUT} =40mA 3.7V≤V _{IN} ≤10.0V	-	0.2	0.3	%/V	②
Input Voltage	V _{IN}		1.8	-	10	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} ΔT _{opr} ·ΔV _{OUT}	I _{OUT} =40mA -40°C≤T _{opr} ≤85°C	-	±100	-	ppm/°C	②

■ ELECTRICAL CHARACTERISTICS (Continued)

XC6201P332 V_{OUT(T)}=3.3V ^{(*)1} Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} ^{(*)2}	V _{IN} =4.3V I _{OUT} =40mA	3.234	3.300	3.366	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =4.3V V _{OUT(E)} ≥2.97V	150	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =4.3V 1mA≤I _{OUT} ≤80mA	-	20	50	mV	②
Dropout Voltage ^{(*)3}	V _{dif1}	I _{OUT} =80mA	-	200	360	mV	②
	V _{dif2}	I _{OUT} =160mA	-	450	700		
Supply Current	I _{SS}	V _{IN} =4.3V	-	2.0	5.0	μA	①
Line Regulation	ΔV _{OUT} ΔV _{IN} ·ΔV _{OUT}	I _{OUT} =40mA 4.3V≤V _{IN} ≤10.0V	-	0.2	0.3	%/V	②
Input Voltage	V _{IN}		1.8	-	10	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} ΔT _{opr} ·ΔV _{OUT}	I _{OUT} =40mA -40°C≤T _{opr} ≤85°C	-	±100	-	ppm/°C	②


XC6201P502 V_{OUT(T)}=5.0V ^{(*)1} Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V _{OUT(E)} ^{(*)2}	V _{IN} =6.0V I _{OUT} =40mA	4.900	5.000	5.100	V	②
Maximum Output Current	I _{OUTmax}	V _{IN} =6.0V V _{OUT(E)} ≥4.57V	200	-	-	mA	②
Load Regulation	ΔV _{OUT}	V _{IN} =6.0V 1mA≤I _{OUT} ≤100mA	-	30	70	mV	②
Dropout Voltage ^{(*)3}	V _{dif1}	I _{OUT} =100mA	-	160	340	mV	②
	V _{dif2}	I _{OUT} =200mA	-	400	600		
Supply Current	I _{SS}	V _{IN} =6.0V	-	2.0	6.0	μA	①
Line Regulation	ΔV _{OUT} ΔV _{IN} ·ΔV _{OUT}	I _{OUT} =40mA 6.0V≤V _{IN} ≤10.0V	-	0.2	0.3	%/V	②
Input Voltage	V _{IN}		1.8	-	10	V	-
Output Voltage Temperature Characteristics	ΔV _{OUT} ΔT _{opr} ·ΔV _{OUT}	I _{OUT} =40mA -40°C≤T _{opr} ≤85°C	-	±100	-	ppm/°C	②

NOTE:


*1: V_{OUT(T)} = Nominal output voltage.*2: V_{OUT(E)} = Effective output voltage (i.e. the output voltage when "V_{OUT(T)}+1.0V" is provided while maintaining a certain I_{OUT} value).*3: V_{dif} = { V_{IN1} ^{(*)5} - V_{OUT1} ^{(*)4} }*4: V_{OUT1} = A voltage equal to 98% of the output voltage when a stabilized (V_{OUT(T)} + 1.0V) is input.*5: V_{IN1} = The input voltage at the time V_{OUT1} is output input voltage has been gradually reduced.

■ TYPICAL APPLICATION CIRCUIT

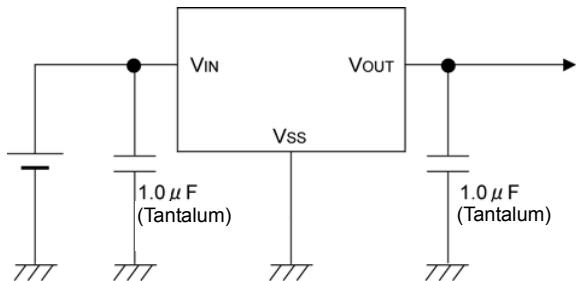


With the XC6201 series regulator, in order to ensure the stabilized output voltage, we suggest that an output capacitor (C_L) of $1 \mu F$ or more be connected between the output pin (VOUT) and the Vss pin. For using low ESR capacitor (e.g. ceramic capacitors), please make sure that the output voltage is more than 1.7V. When the output voltage is from 1.3V to 1.6V, the output capacitor should be a tantalum capacitor with a capacitance of $2.2 \mu F$. We also suggest an input capacitor (C_{IN}) should be connected between the VIN and the Vss in order to stabilize input power source.

OUTPUT VOLTAGE	C_{IN}	C_L (TANTALUM)	C_L (LOW ESR)
1.3V~1.6V	$\geq 1.0 \mu F$	$\geq 2.2 \mu F$	—
1.7V~6.0V	$\geq 1.0 \mu F$	$\geq 1.0 \mu F$	$\geq 1.0 \mu F$

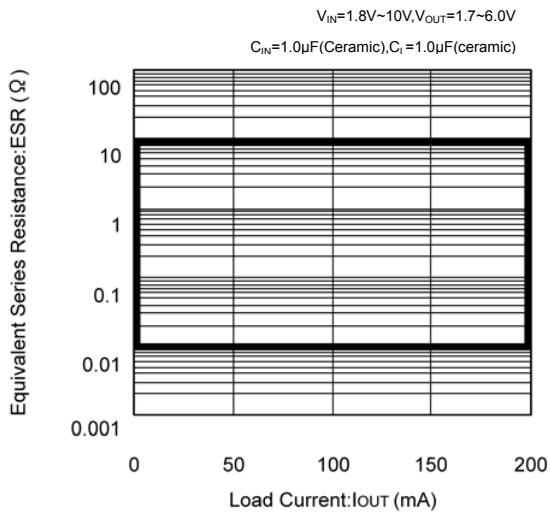


■ TEST CIRCUITS

Circuit ① : Supply Current

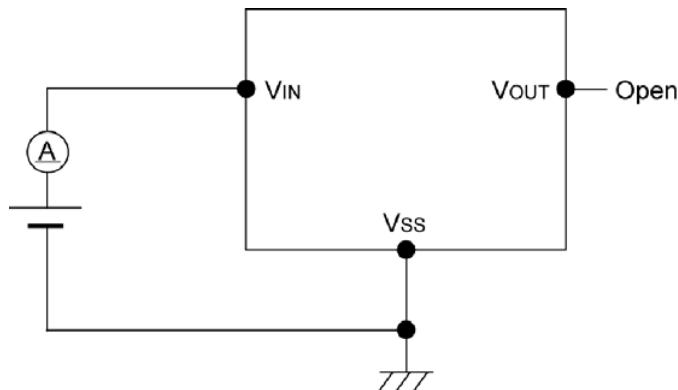

Circuit ② : Output Voltage, Oscillation, Line Regulation, Dropout Voltage, Load Regulation





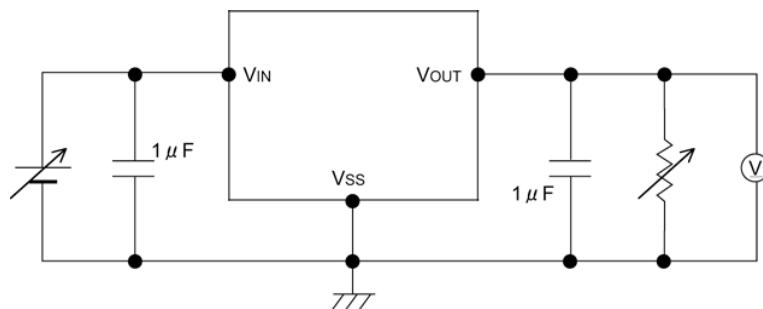


■ NOTE ON USE

1. Please use this IC within the stated absolute maximum ratings. The IC is liable to malfunction should the ratings be exceeded. When a voltage higher than the V_{IN} flows to the V_{OUT} like when using two power supplies, please connect a Schottky barrier diode between the V_{OUT} and the V_{IN} and do not exceed the V_{OUT} rating.
2. An oscillation may occur by the impedance between a power supply and the input of the IC. Where the impedance is 10Ω or more, please use an input capacitor (C_{IN}) of at least 1 μF. In case of high output current, operation can be stabilized by increasing the input capacitor value. Also an oscillation may occur if the input capacitor value is smaller than the input impedance when the output capacitance (C_L) is large. In such cases, operations can be stabilized by either increasing the input capacitor value or reducing the output capacitor value.
3. Please ensure that output current (I_{OUT}) is less than $P_d / (V_{IN} - V_{OUT})$ and do not exceed the rated power dissipation value (P_d) of the package.







■ TYPICAL PERFORMANCE CHARACTERISTICS

(1) Output Voltage vs. Output Current

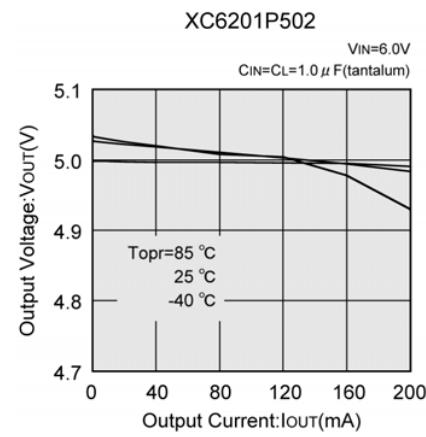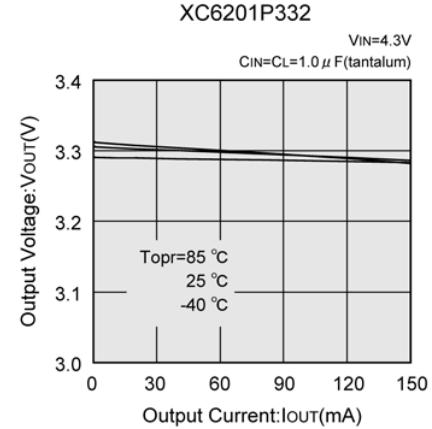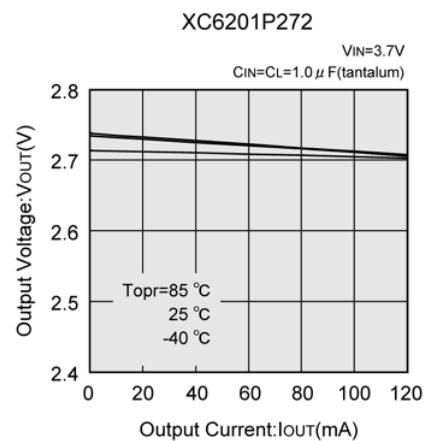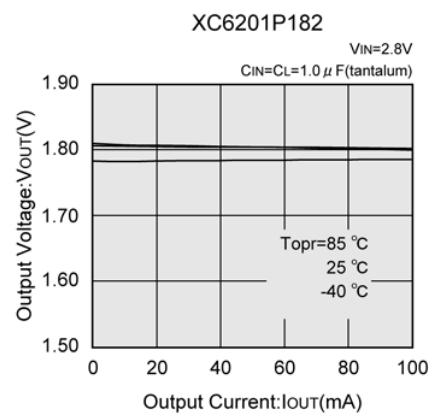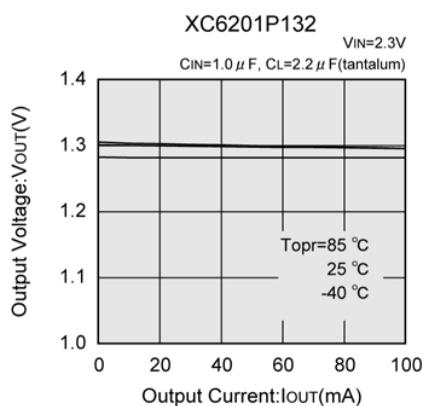





■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Input Voltage

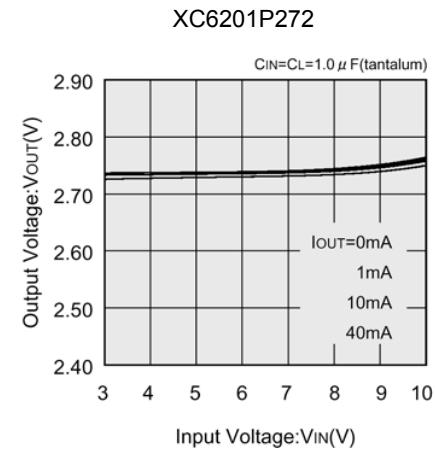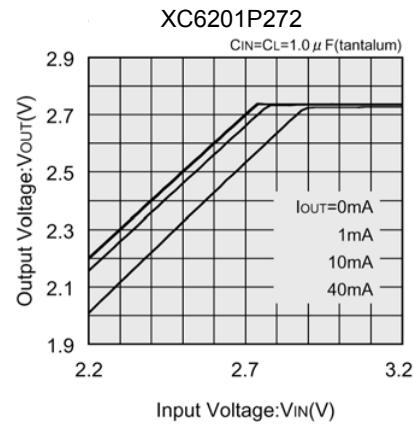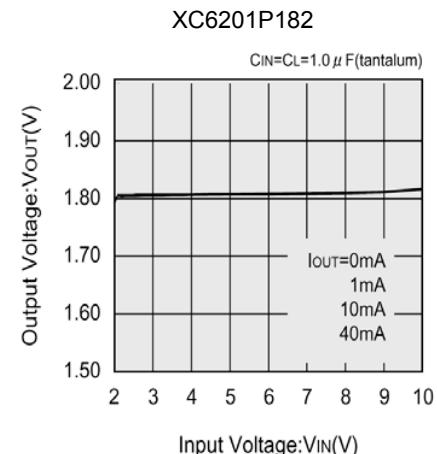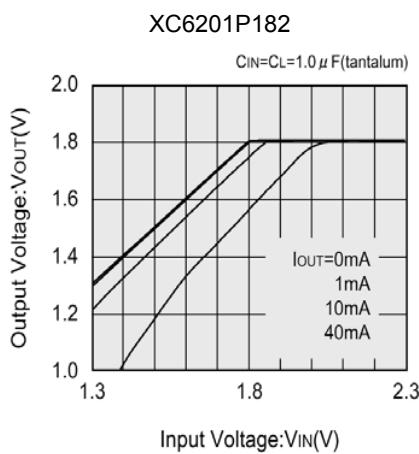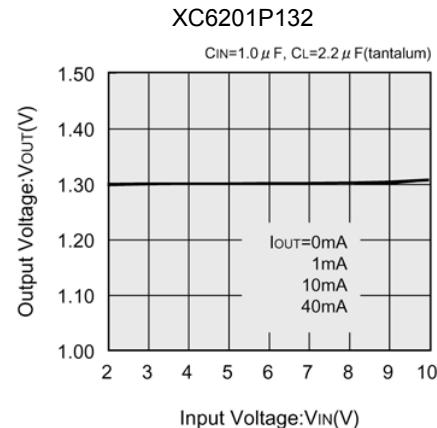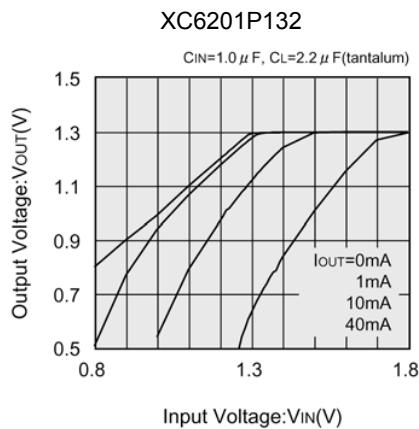






■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Input Voltage (Continued)

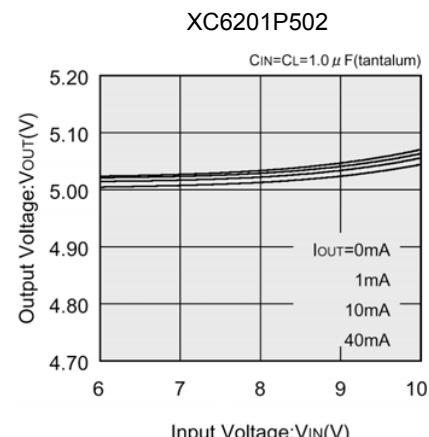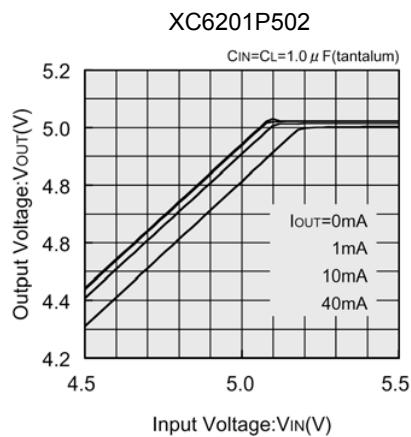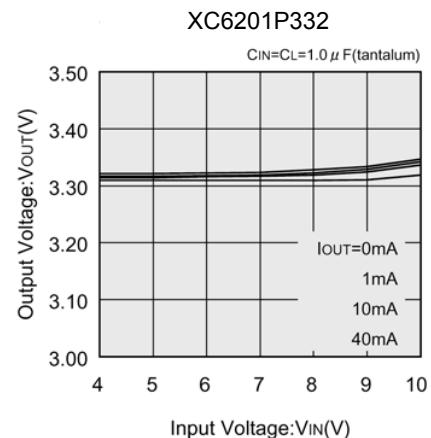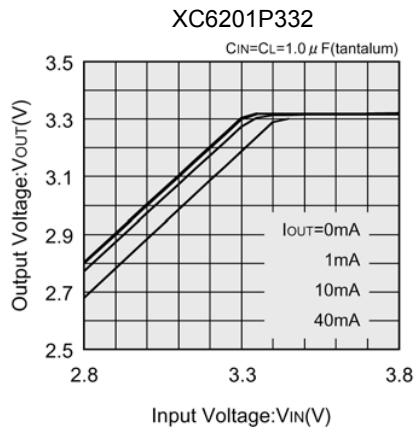







■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(3) Dropout Voltage vs. Output Current

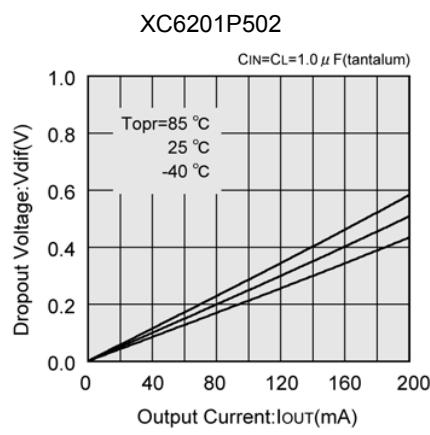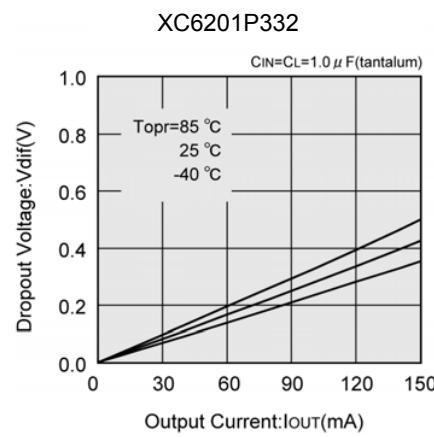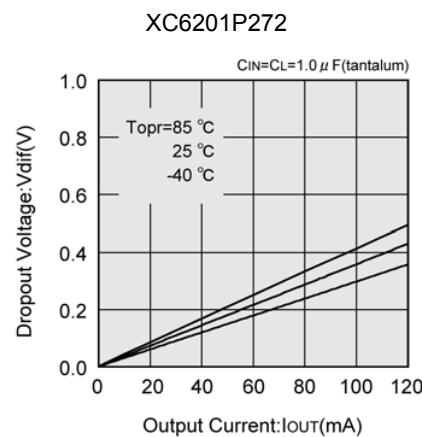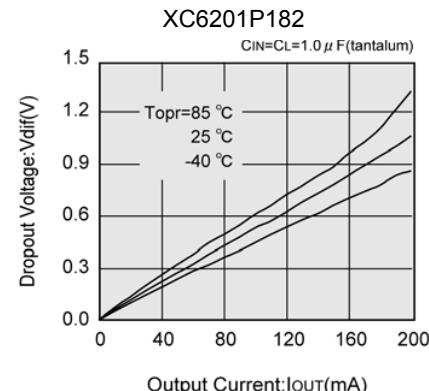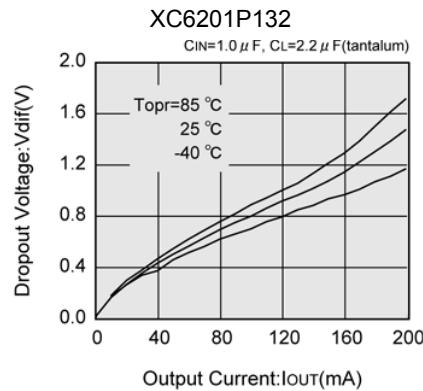





■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(4) Supply Current vs. Input Voltage

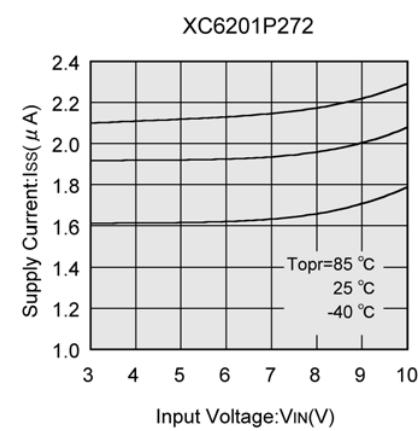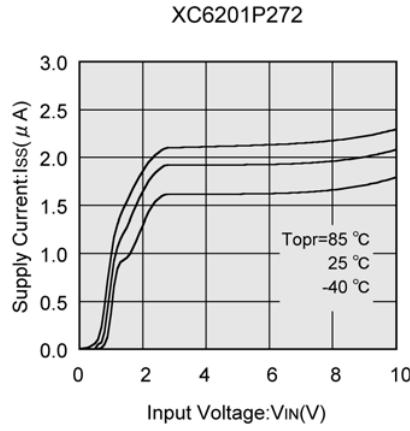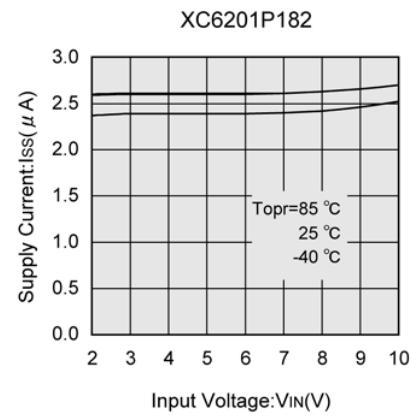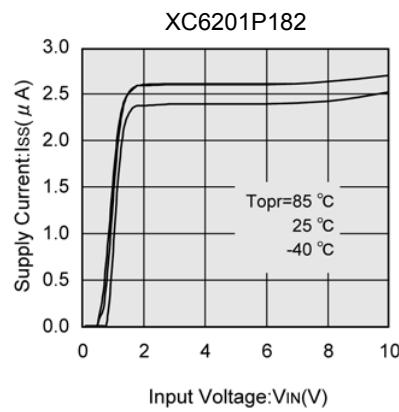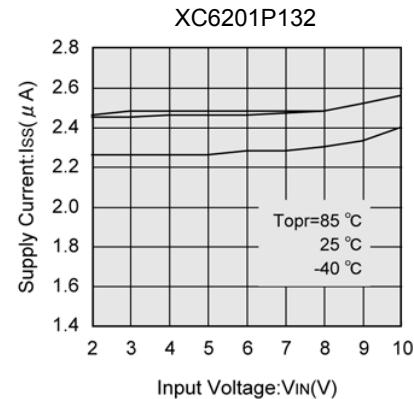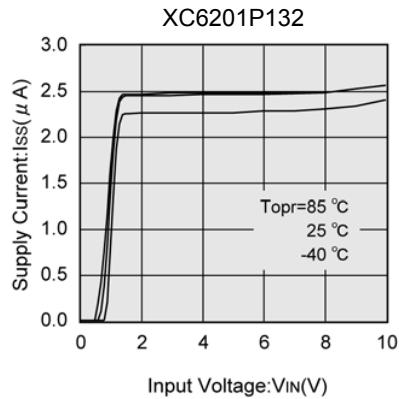


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(4) Supply Current vs. Input Voltage (Continued)

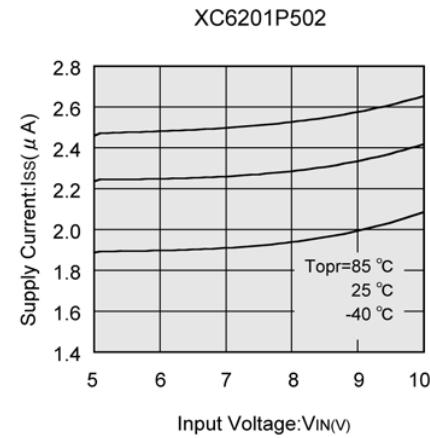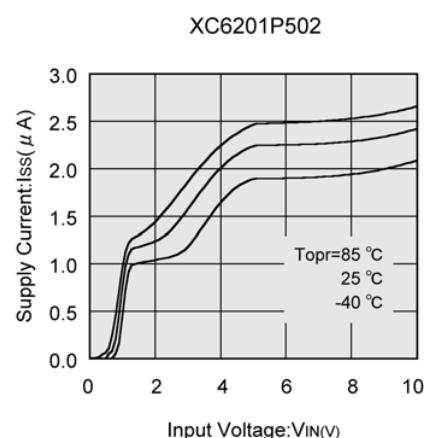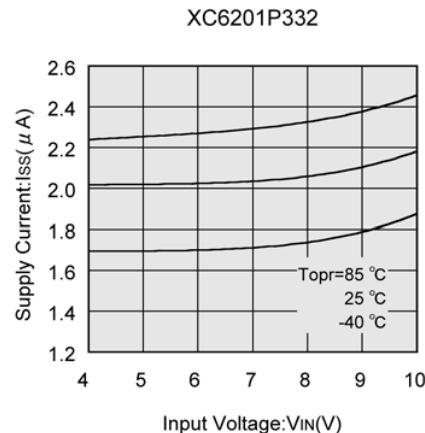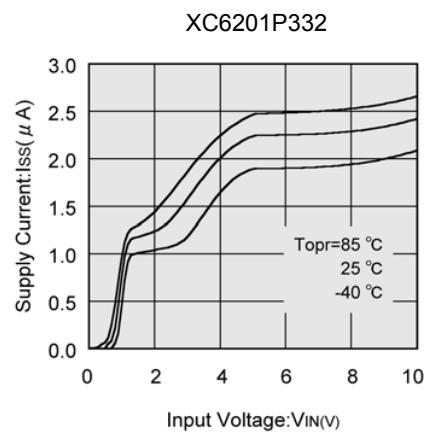

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(5) Output Voltage vs. Ambient Temperature

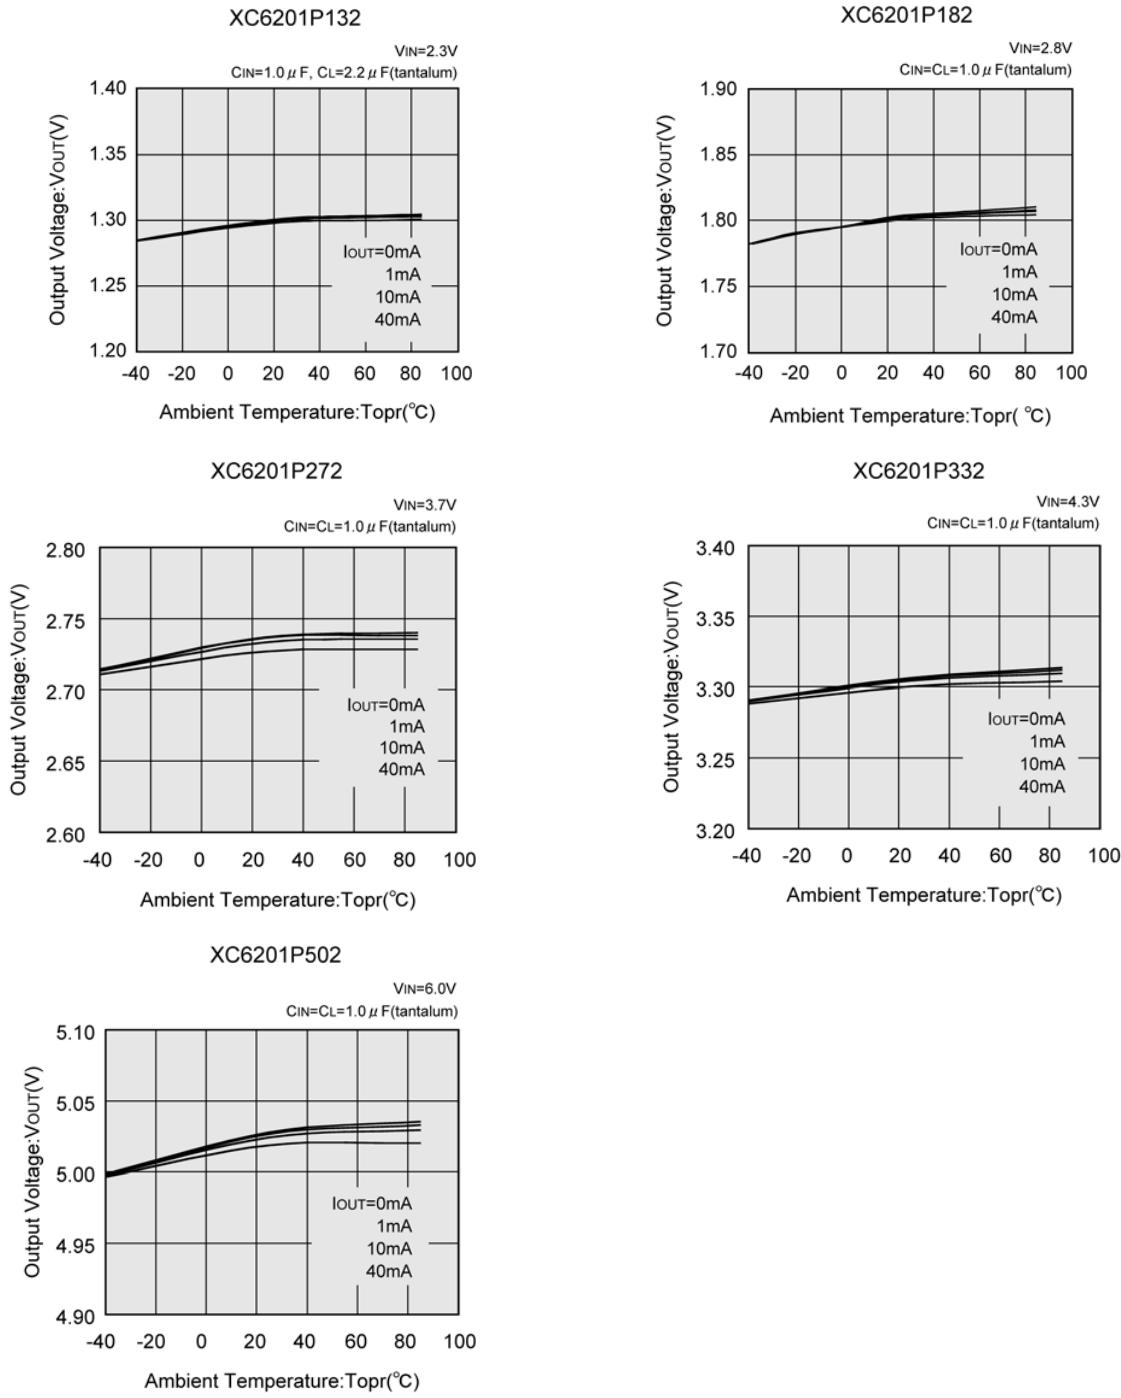


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(6) Supply Current vs. Ambient Temperature


XC6201P132

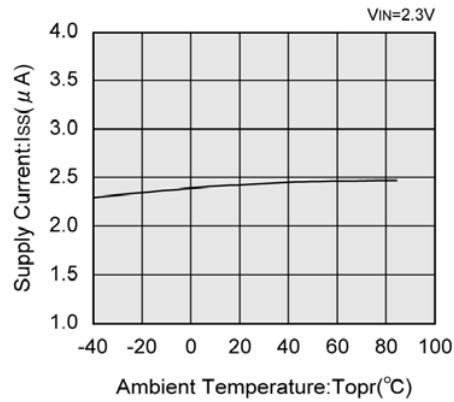


XC6201P182

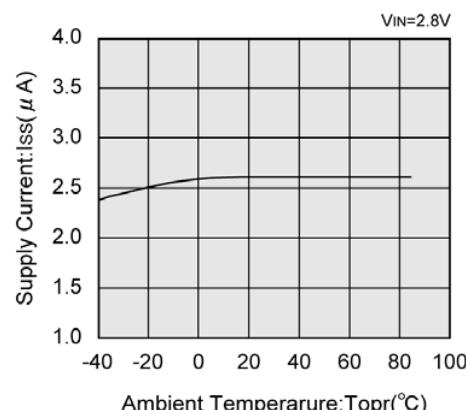


XC6201P272

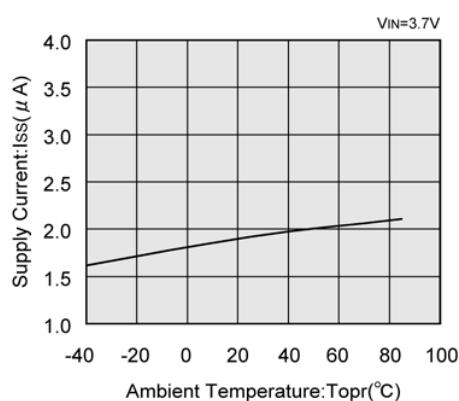

XC6201P332

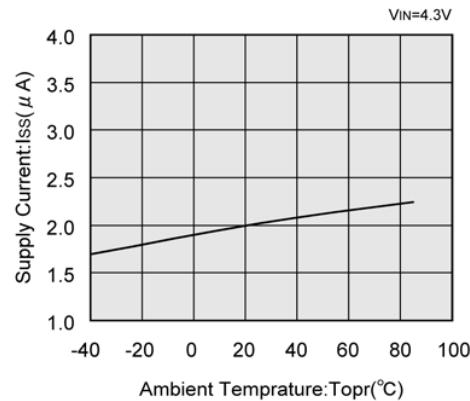


XC6201P502

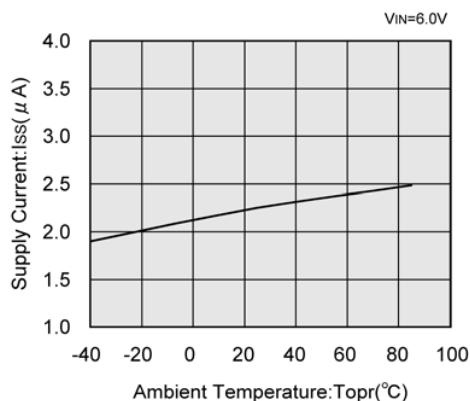


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(7) Input Transient Response


XC6201P132

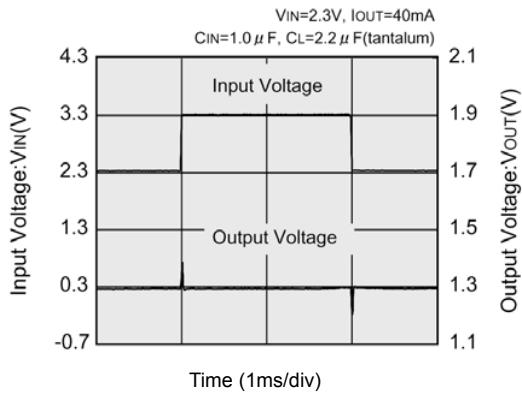


XC6201P182

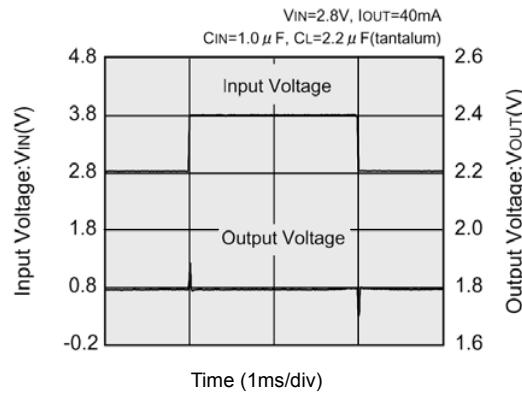


XC6201P272

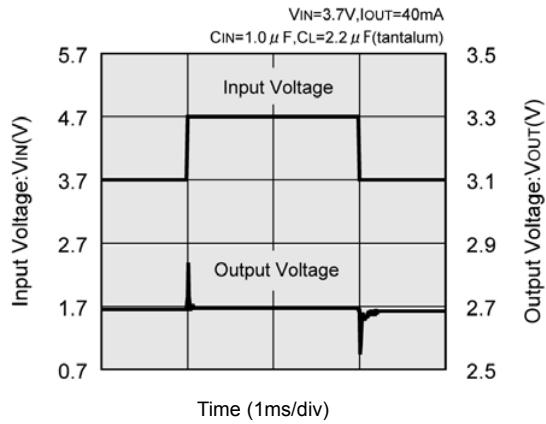

XC6201P332

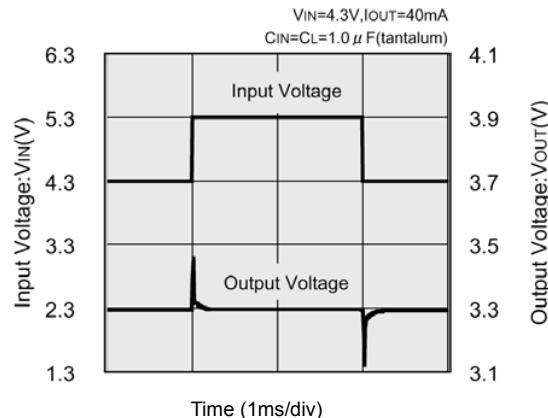


XC6201P502

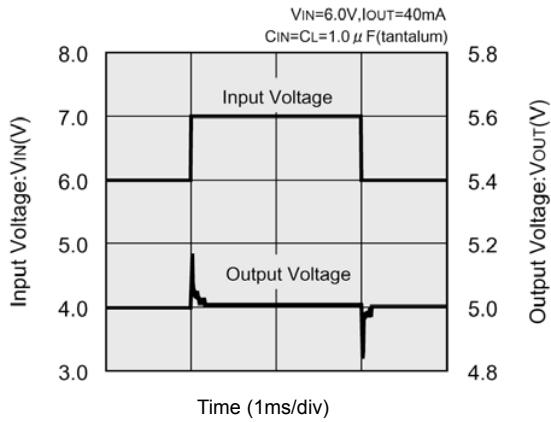






■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Load Transient Response

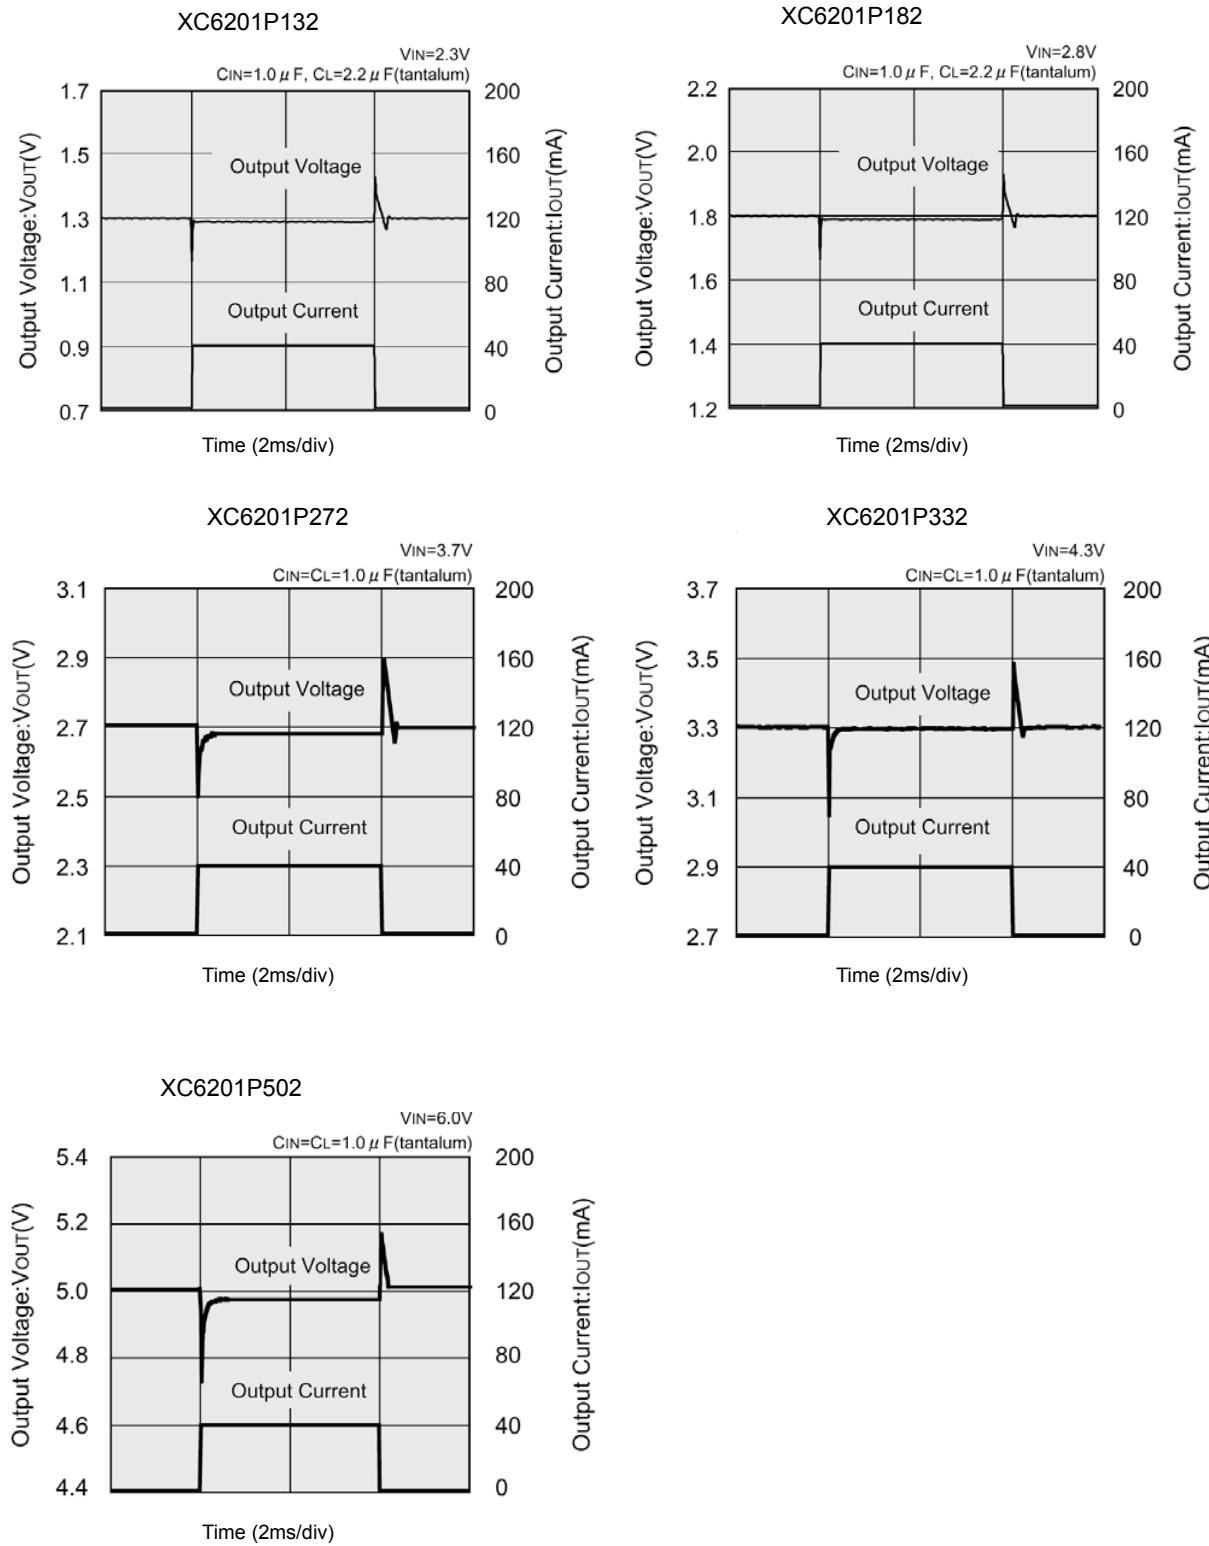


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) Ripple Rejection Rate

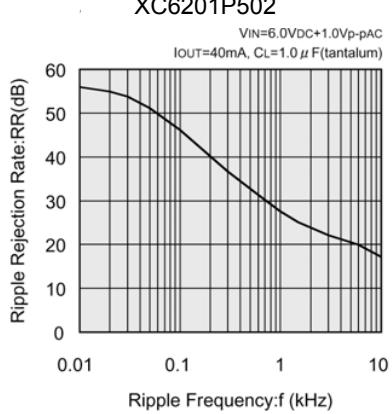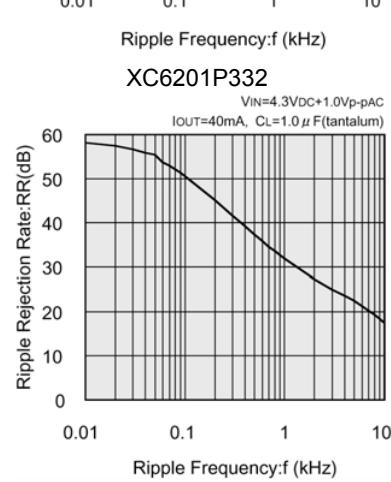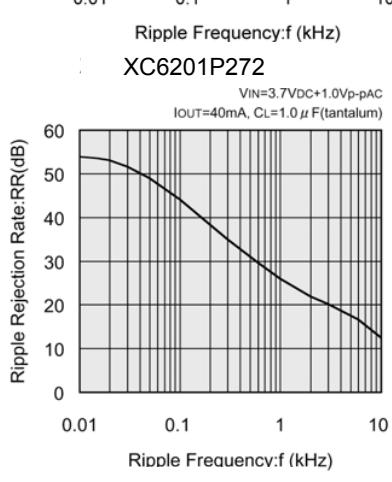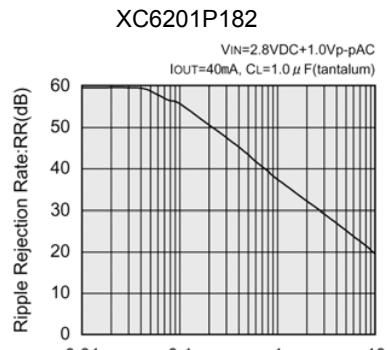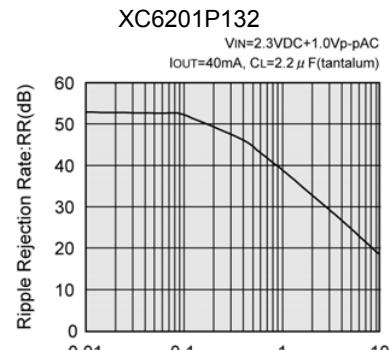


(10) Output Noise Density

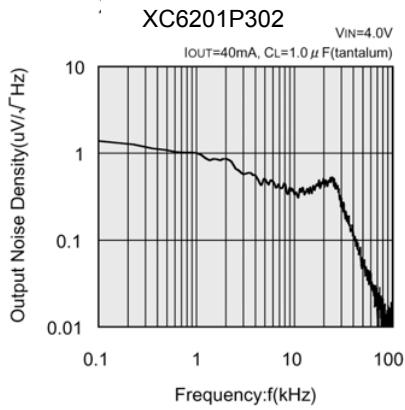

■ PACKAGING INFORMATION


● SOT-25

Unit : mm

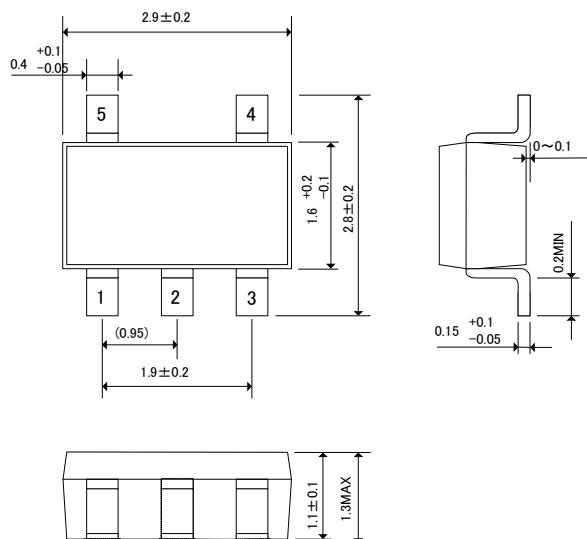

● SOT-89


Unit : mm

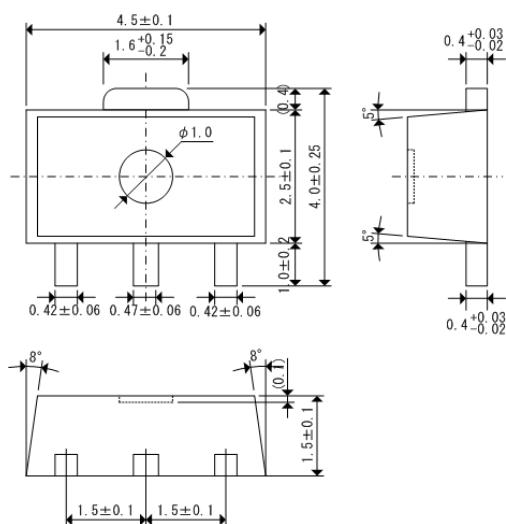

■PACKAGING INFORMATION (Continued)


●TO-92

Paper type


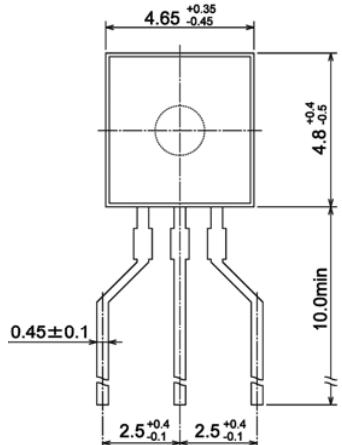


Unit : mm

Bag

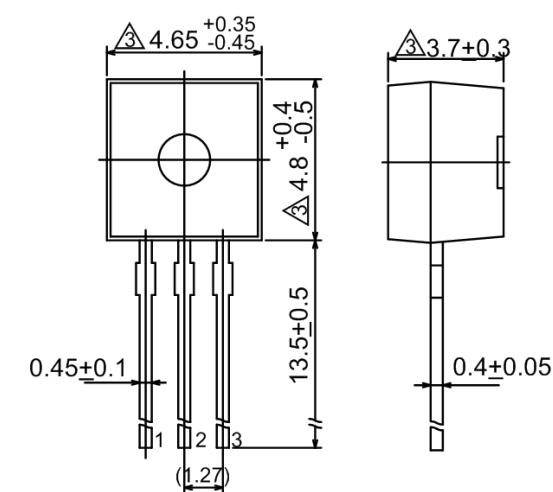


Unit : mm




●USP-6B

Unit : mm

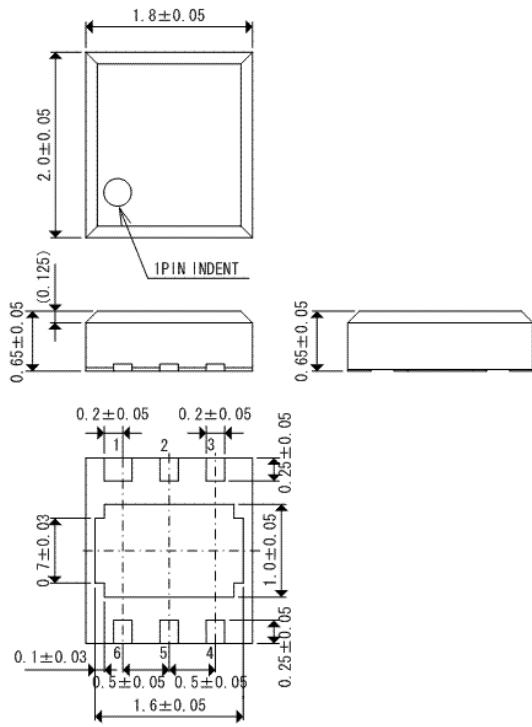


■PACKAGING INFORMATION (Continued)

●USP-6B Reference Pattern Layout

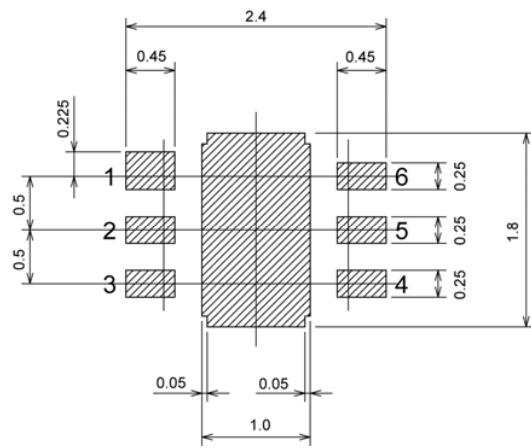


●USP-6B Reference Metal Mask Design

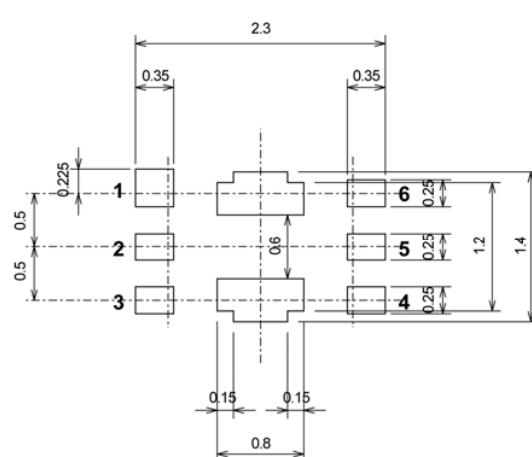


■ MARKING RULE

● SOT-89, SOT-25



SOT-89
(TOP VIEW)



SOT-25
(TOP VIEW)

① represents the product series

MARK	PRODUCT SERIES
1	XC6201Pxxxxx

② represents type of regulator

MARK	VOLTAGE (V)
5	0.1 ~ 3.0
6	3.1 ~ 6.0

③ represents output voltage


MARK	OUTPUT VOLTAGE (V)	MARK	OUTPUT VOLTAGE (V)
0	—	3.1	—
1	—	3.2	—
2	—	3.3	—
3	—	3.4	—
4	—	3.5	—
5	—	3.6	—
6	—	3.7	—
7	—	3.8	—
8	—	3.9	—
9	—	4.0	—
A	—	4.1	—
B	—	4.2	—
C	1.3	4.3	—
D	1.4	4.4	—
E	1.5	4.5	—
F	1.6	4.6	—
H	1.7	4.7	—
K	1.8	4.8	—
L	1.9	4.9	—
M	2.0	5.0	—
N	2.1	5.1	—
P	2.2	5.2	—
R	2.3	5.3	—
S	2.4	5.4	—
T	2.5	5.5	—
U	2.6	5.6	—
V	2.7	5.7	—
X	2.8	5.8	—
Y	2.9	5.9	—
Z	3.0	6.0	—

④ represents assembly lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

■ MARKING RULE (Continued)

● TO-92

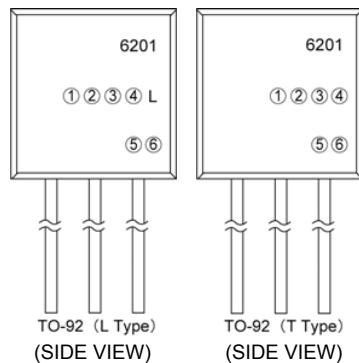

① represents type of regulator

MARK	PRODUCT SERIES	
P	XC6201Pxxxxx	
T	XC6201Txxxxx	

②③ represents output voltage

MARK	VOLTAGE (V)		PRODUCT SERIES
	②	③	
3	3	3.3	XC6201Px33xx
5	0	5.0	XC6201Px50xx

④ represents detect voltage accuracy

MARK	DETCT VOLTAGE ACCURACY	PRODUCT SERIES
1	Within $\pm 1\%$	XC6201Pxx1xx
2	Within $\pm 2\%$	XC6201Pxx2xx

⑤ represents least significant digit of production year


MARK	PRODUCTION YEAR	
3	2003	
4	2004	

⑥ represents the production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

Note: No character inversion used.

● USP-6B



USP-6B
(TOP VIEW)

①② represents product series

MARK	PRODUCT SERIES	
	①	②
0	1	XC6201xxxxDx

③ represents type of regulator

MARK	TYPE	PRODUCT SERIES
P	3pin Regulator	XC6201PxxxDx
T	VIN=7V(Rated)	XC6201TxxxDx

④⑤ represents output voltage

MARK	VOLTAGE (V)		PRODUCT SERIES
	④	⑤	
3	3	3.3	XC6201x33xDx
5	0	5.0	XC6201x50xDx

⑥ represents assembly lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

Note: No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.