

"High Frequency Ceramic Solutions"

1.80 GHz Balun

Detail Specification: 02/19/2003

P/N 1800BL18B200



Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
1800BL18B200_	1700 - 1900	50/200 Ω	0.8 dB max.	9.5 dB min.	180°±10°	2.0 dB max.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 / 200 Ω	-40 to +85°C	3,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.126 ± .006	0.064 ± .006	0.034 ± .004	0.022 ± .006	0.014 ± .006	0.012 ± .004 / -.008	0.016 ± .004	0.039 ± .004
mm	3.2 ± 0.15	1.6 ± 0.15	0.85 ± 0.1	0.55 ± 0.15	0.35 ± 0.15	0.3 ± 0.1 / -0.2	0.4 ± 0.1	1.0 ± 0.1

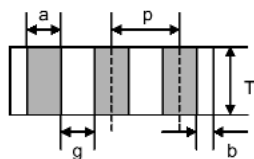

Terminal Configuration


- | | | | |
|---|---------------------|---|-------------------|
| 1 | GND or DC Feed | 4 | Balanced Port (2) |
| 2 | Unbalanced Port (1) | 5 | NC |
| 3 | GND or DC Feed | 6 | Balanced Port (3) |



Mounting Considerations

Mount devices with colored mark facing up.

With DC Feed

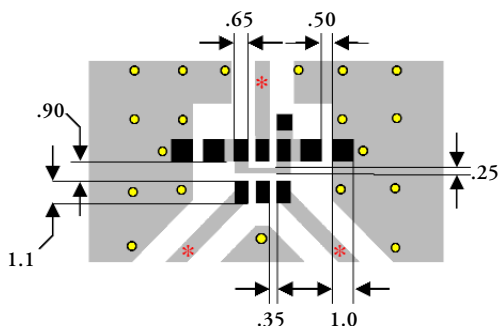


* Line width should be designed to provide 50 Ω impedance matching characteristics.

By-pass capacitor(s) should be connected when feeding DC power.

- Solder Resist
- Land
- Through-hole (ϕ 0.3)

Without DC Feed

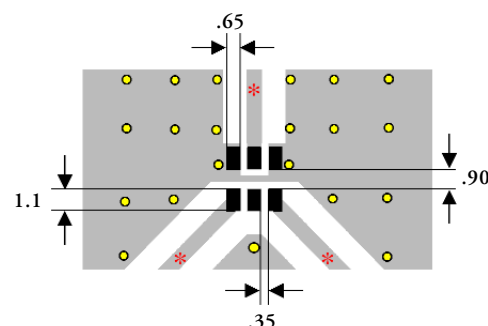

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

“High Frequency Ceramic Solutions”

1.8 GHz Balun

Detail Specification: 02/19/2003

P/N 1800BL18B200

Page 2 of 2

P/N 1800BL18B200 Balun Typical - Return Loss & Insertion Loss

