

# "High Frequency Ceramic Solutions"

## 5.80 GHz Balun

Detail Specification: 02/19/2003

P/N 5800BL15B100


Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
5800BL15B100_	5725 - 5875	50/100 $\Omega$	1.0 dB	9.5 dB	180°±8°	0.75 dB

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 / 100 $\Omega$	-40 to +85°C	4,000


### Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

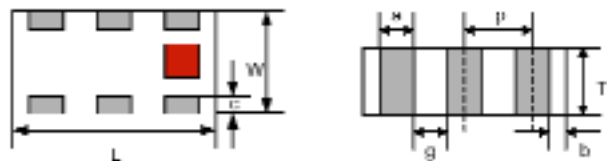


### Terminal Configuration

1	Unbalanced Port	4	Balanced Port
2	GND or DC Feed	5	GND
3	Balanced Port	6	NC






### Mounting Considerations

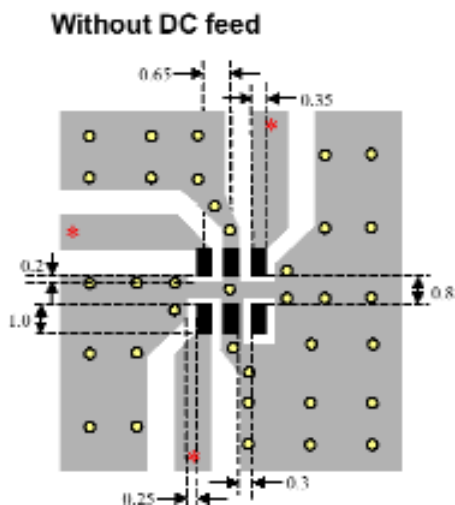
Mount devices with colored mark facing up.



\* Line width should be designed to provide 50 $\Omega$  impedance matching characteristics.

-  Solder Resist
-  Land
-  Through-hole ( $\phi$  0.3)

Units: mm

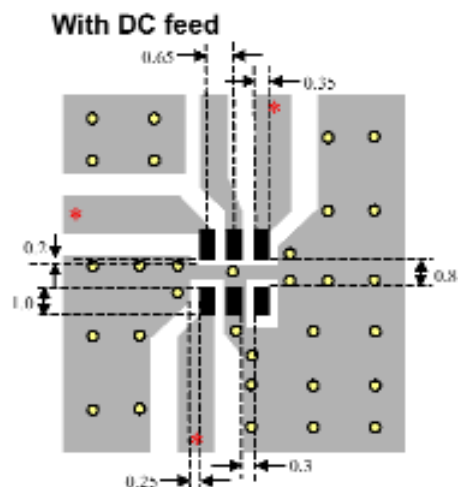

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.

# “High Frequency Ceramic Solutions”


## 5.80 GHz Balun

Detail Specification: 02/19/2003

P/N 5800BL15B100

Page 2 of 2

### P/N 5800BL15B100 Typical Insertion Loss

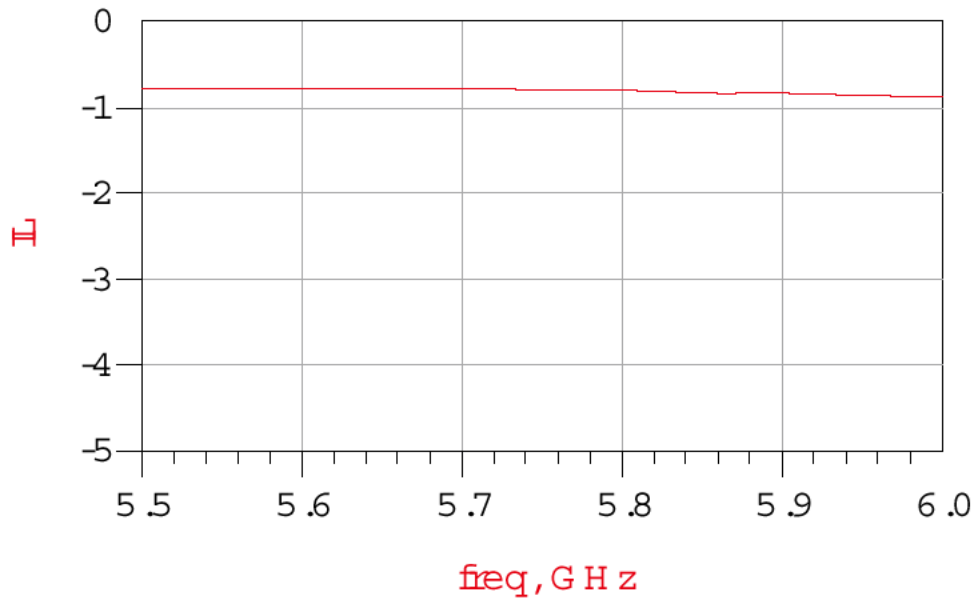

### P/N 5800BL15B100 Typical Return Loss

