



Intellimod™ L-Series Three Phase IGBT Inverter + Brake 100 Amperes/600 Volts

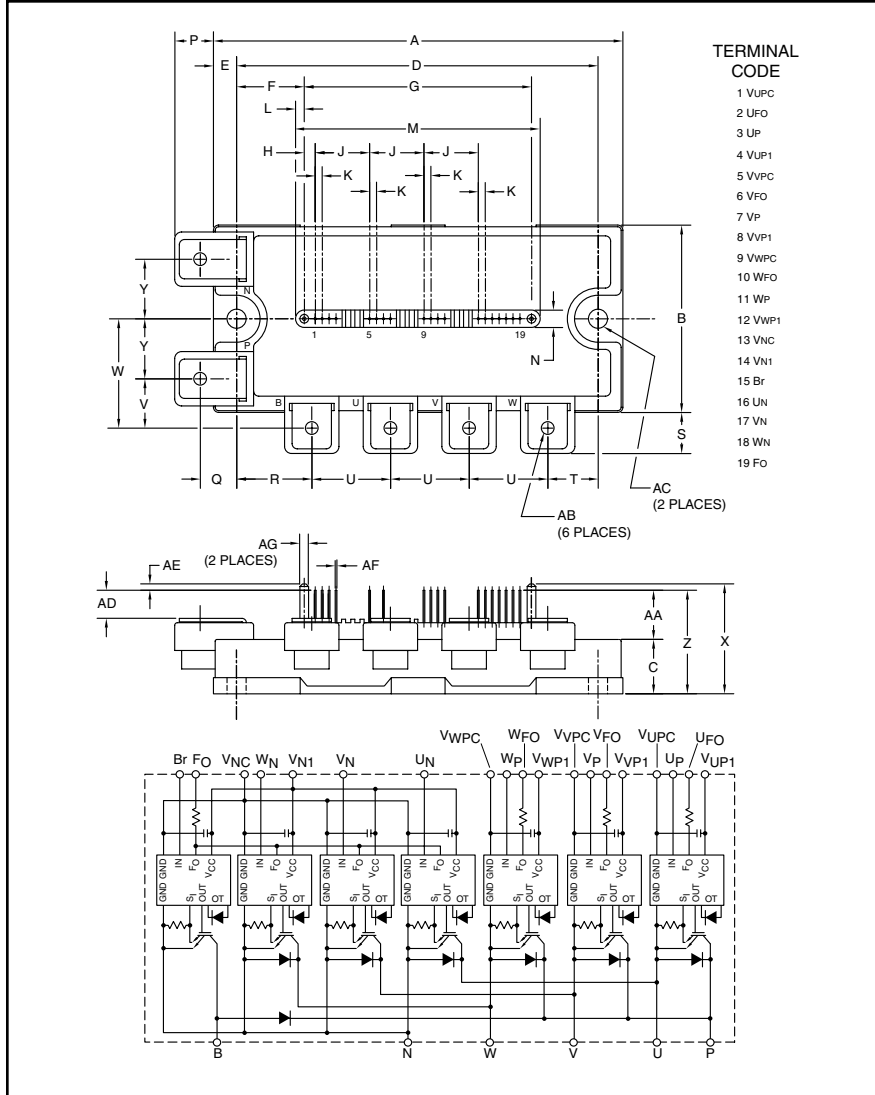

TERMINAL CODE

- 1 VUPC
- 2 UFO
- 3 UP
- 4 VUP1
- 5 VWPC
- 6 VFO
- 7 VP
- 8 VWP1
- 9 VWPC
- 10 WFO
- 11 WP
- 12 WWP1
- 13 VNC
- 14 VN1
- 15 Br
- 16 UN
- 17 VN
- 18 WN
- 19 FO

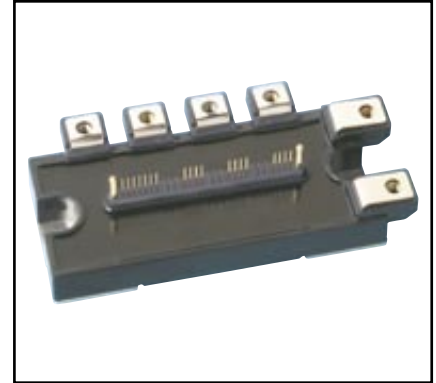

Description:
Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

- Features:**
- Complete Output Power Circuit
 - Gate Drive Circuit
 - Protection Logic
 - Short Circuit
 - Over Temperature Using On-chip Temperature Sensing
 - Under Voltage
 - Low Loss Using 5th Generation IGBT Chip

- Applications:**
- Inverters
 - UPS
 - Motion/Servo Control
 - Power Supplies

Ordering Information:
Example: Select the complete part number from the table below -i.e. PM100RLA060 is a 600V, 100 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|--------|-------------|
| A | 4.72 | 120.0 |
| B | 2.17 | 55.0 |
| C | 0.63 | 16.0 |
| D | 4.17 | 106.0 |
| E | 0.28 | 7.0 |
| F | 0.78 | 19.75 |
| G | 2.62 | 66.5 |
| H | 0.13 | 3.25 |
| J | 0.63 | 16.0 |
| K | 0.08 | 2.0 |
| L | 0.10 | 2.5 |
| M | 2.81 | 71.5 |
| N | 0.20 | 5.0 |
| P | 0.43 | 11.0 |
| Q | 0.42 | 10.75 |
| R | 0.87 | 22.0 |

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| S | 0.46 | 11.75 |
| T | 0.59 | 15.0 |
| U | 0.91 | 23.0 |
| V | 0.57 | 14.5 |
| W | 1.26 | 32.0 |
| X | 1.22 | 31.0 |
| Y | 0.69 | 17.5 |
| Z | 1.14 | 29.0 |
| AA | 0.51 | 13.0 |
| AB | M5 Metric | M5 |
| AC | 0.22 Dia. | Dia. 5.5 |
| AD | 0.28 | 7.0 |
| AE | 0.08 | 2.0 |
| AF | 0.02 Sq. | Sq. 0.5 |
| AG | 0.10 Dia. | Dia. 2.5 |

| Type | Current Rating Amperes | V _{CES} Volts (x 10) |
|------|---------------------------|----------------------------------|
| PM | 100 | 60 |

PM100RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
100 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | PM100RLA060 | Units |
|---|------------------------|-------------|------------------|
| Power Device Junction Temperature | T_j | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws | — | 31 | in-lb |
| Mounting Torque, M5 Main Terminal Screws | — | 31 | in-lb |
| Module Weight (Typical) | — | 380 | Grams |
| Supply Voltage, Surge (Applied between P - N) | $V_{\text{CC(surge)}}$ | 550 | Volts |
| Self-protection Supply Voltage Limit (Short Circuit protection Capability)* | $V_{\text{CC(prot.)}}$ | 400 | Volts |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal | V_{ISO} | 2500 | Volts |

*VD = 13.5 ~ 16.5V, Inverter Part, $T_j = 125^\circ\text{C}$

IGBT Inverter Sector

| | | | |
|--|---------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_C$ | 100 | Amperes |
| Peak Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_{\text{CP}}$ | 200 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 356 | Watts |

IGBT Brake Sector

| | | | |
|--|---------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_C$ | 50 | Amperes |
| Peak Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_{\text{CP}}$ | 100 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 228 | Watts |
| Diode Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$) | $V_{\text{R(DC)}}$ | 600 | Volts |
| Diode Forward Current | I_F | 50 | Amperes |

Control Sector

| | | | |
|--|------------------|----|-------|
| Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{U1PC}}$, $V_{\text{VP1}}-V_{\text{V1PC}}$, $V_{\text{WP1}}-V_{\text{W1PC}}$, $V_{\text{N1}}-V_{\text{N1C}}$) | V_D | 20 | Volts |
| Input Voltage (Applied between U_P-V_{U1PC} , V_P-V_{V1PC} , W_P-V_{W1PC} , $U_N-V_{\text{N1}}-W_N-Br-V_{\text{N1C}}$) | V_{CIN} | 20 | Volts |
| Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{U1PC}}$, $V_{\text{FO}}-V_{\text{V1PC}}$, $W_{\text{FO}}-V_{\text{W1PC}}$, F_O-V_{N1C}) | V_{FO} | 20 | Volts |
| Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O Terminals) | I_{FO} | 20 | mA |

PM100RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
 100 Amperes/600 Volts


Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|---------------|---|------|------|------|---------------|
| IGBT Inverter Sector | | | | | | |
| Collector-Emitter Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{EC} | $-I_C = 100A, V_{CIN} = 15V, V_D = 15V$ | — | 2.2 | 3.3 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15V, V_{CIN} = 0V, I_C = 100A,$ $T_j = 25^\circ\text{C}$ | — | 1.6 | 2.1 | Volts |
| | | $V_D = 15V, V_{CIN} = 0V, I_C = 100A,$ $T_j = 125^\circ\text{C}$ | — | 1.5 | 2.0 | Volts |
| Inductive Load Switching Times | t_{on} | | 0.5 | 1.0 | 2.4 | μs |
| | t_{rr} | $V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$ | — | 0.2 | 0.4 | μs |
| | $t_{C(on)}$ | $V_{CC} = 300V, I_C = 100A$ | — | 0.4 | 1.0 | μs |
| | t_{off} | $T_j = 125^\circ\text{C}$ | — | 1.2 | 2.5 | μs |
| | $t_{C(off)}$ | | — | 0.5 | 1.0 | μs |


IGBT Brake Sector

| | | | | | | |
|--------------------------------------|---------------|--|---|-----|-----|-------|
| Collector-Emitter Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{FM} | $I_F = 50A$ | — | 2.2 | 3.3 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 25^\circ\text{C}$ | — | 1.6 | 2.1 | Volts |
| | | $V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 125^\circ\text{C}$ | — | 1.5 | 2.0 | Volts |

Note 1: T_C (Base Plate) Measurement Point



Note 2: T_C (Under the Chip) Measurement Point



| Arm Axis | UP | | VP | | WP | | UN | | VN | | WN | | Br | |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|
| | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi |
| X | 28.3 | 28.0 | 65.0 | 65.2 | 87.0 | 87.2 | 39.3 | 39.5 | 54.0 | 53.7 | 76.0 | 75.7 | 17.5 | 18.7 |
| Y | -8.5 | 1.7 | -8.5 | 1.7 | -8.5 | 1.7 | 6.5 | -5.2 | 6.5 | -5.2 | 6.5 | -5.2 | -10.4 | 4.0 |

PM100RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
100 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|----------------------|--|------|------|------|------------------|
| Control Sector | | | | | | |
| Short Circuit Trip Level | SC | Inverter Part | 200 | — | — | Amperes |
| ($-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$) | | Brake Part | 100 | — | — | Amperes |
| Short Circuit Current Delay Time | $t_{\text{off(SC)}}$ | $V_D = 15\text{V}$ | — | 0.2 | — | μs |
| Over Temperature Protection | OT | Trip Level | 135 | 145 | 155 | $^\circ\text{C}$ |
| (Detect T_j of IGBT Chip) | OT_R | Reset Level | — | 125 | — | $^\circ\text{C}$ |
| Supply Circuit Under-voltage Protection | UV | Trip Level | 11.5 | 12.0 | 12.5 | Volts |
| ($-20 \leq T_j \leq 125^\circ\text{C}$) | UV_R | Reset Level | — | 12.5 | — | Volts |
| Circuit Current | I_D | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{N1}}-V_{\text{NC}}$ | — | 20 | 30 | mA |
| | | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP1}}-V_{\text{XPC}}$ | — | 5 | 10 | mA |
| Input ON Threshold Voltage | $V_{\text{th(on)}}$ | Applied between U_P-V_{UPC} . | 1.2 | 1.5 | 1.8 | Volts |
| Input OFF Threshold Voltage | $V_{\text{th(off)}}$ | V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N - W_N -Br- V_{NC} | 1.7 | 2.0 | 2.3 | Volts |
| Fault Output Current* | $I_{\text{FO(H)}}$ | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$ | — | — | 0.01 | mA |
| | $I_{\text{FO(L)}}$ | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$ | — | 10 | 15 | mA |
| Fault Output Pulse Width* | t_{FO} | $V_D = 15\text{V}$ | 1.0 | 1.8 | — | ms |

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified










| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Units |
|-------------------------------------|-----------------------|--|------|------|-------|-----------------------|
| Junction to Case Thermal Resistance | $R_{\text{th(j-c)Q}}$ | Inverter IGBT (Per 1/6 Module) (Note 1) | — | — | 0.35 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)D}}$ | Inverter FWDi (Per 1/6 Module) (Note 1) | — | — | 0.56 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)Q}}$ | Brake IGBT (Per 1/6 Module) (Note 1) | — | — | 0.55 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)D}}$ | Brake FWDi (Per 1/6 Module) (Note 1) | — | — | 0.92 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)Q}}$ | Inverter IGBT (Per 1/6 Module) (Note 2) | — | — | 0.27 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)D}}$ | Inverter FWDi (Per 1/6 Module) (Note 2) | — | — | 0.43 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)Q}}$ | Brake IGBT (Per 1/6 Module) (Note 2) | — | — | 0.42 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)D}}$ | Brake FWDi (Per 1/6 Module) (Note 2) | — | — | 0.71 | $^\circ\text{C/Watt}$ |
| Contact Thermal Resistance | $R_{\text{th(c-f)}}$ | Case to Fin Per Module, Thermal Grease Applied (Note 1) | — | — | 0.038 | $^\circ\text{C/Watt}$ |

Recommended Conditions for Use

| Characteristic | Symbol | Condition | Value | Units |
|---------------------------------|-----------------------|--|----------------|---------------|
| Supply Voltage | V_{CC} | Applied across P-N Terminals | ≤ 400 | Volts |
| Control Supply Voltage** | V_D | Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$ | 15.0 ± 1.5 | Volts |
| Input ON Voltage | $V_{\text{CIN(on)}}$ | Applied between U_P-V_{UPC} . | ≤ 0.8 | Volts |
| Input OFF Voltage | $V_{\text{CIN(off)}}$ | V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N - W_N -Br- V_{NC} | ≥ 9.0 | Volts |
| PWM Input Frequency | f_{PWM} | — | ≤ 20 | kHz |
| Arm Shoot-through Blocking Time | t_{DEAD} | Input Signal | ≥ 2.0 | μs |

** With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5\text{V}/\mu\text{s}$, Variation $\leq 2\text{V}$ peak to peak.

PM100RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
100 Amperes/600 Volts

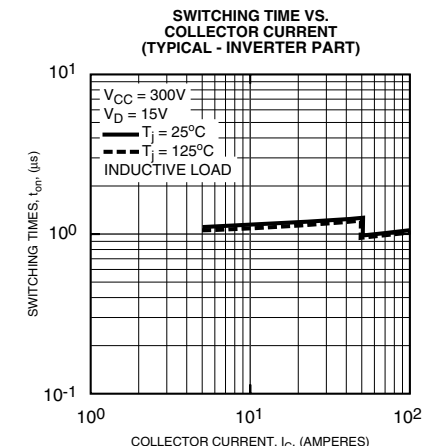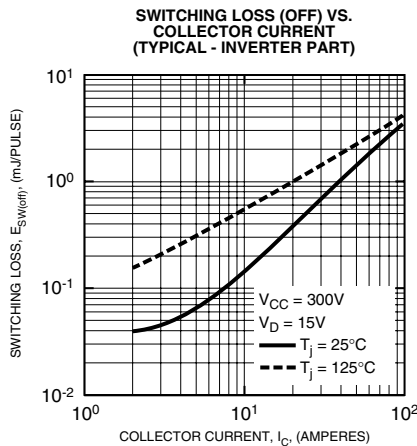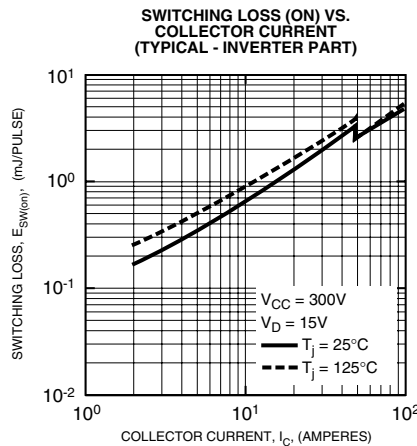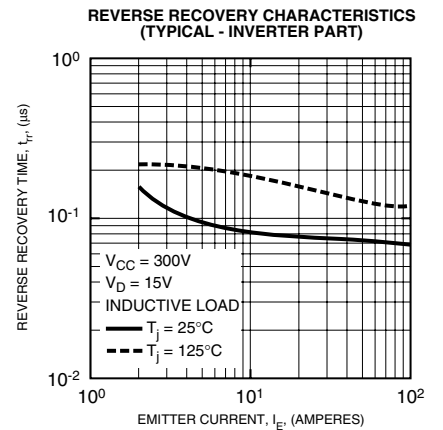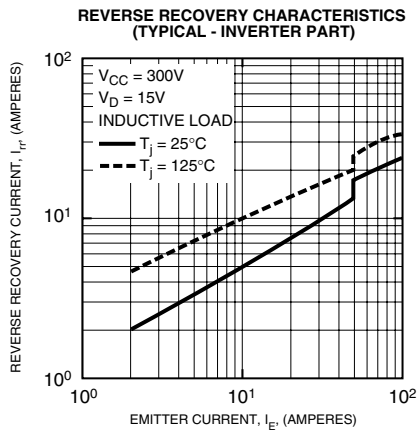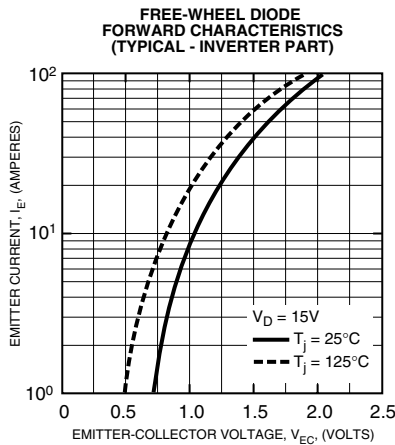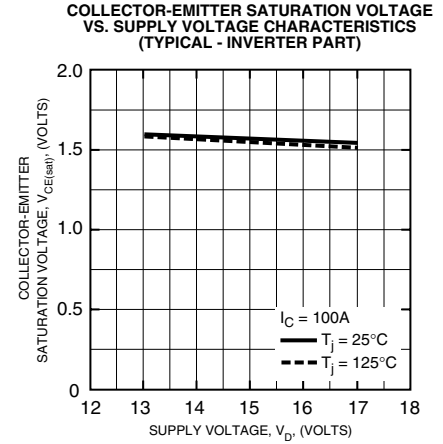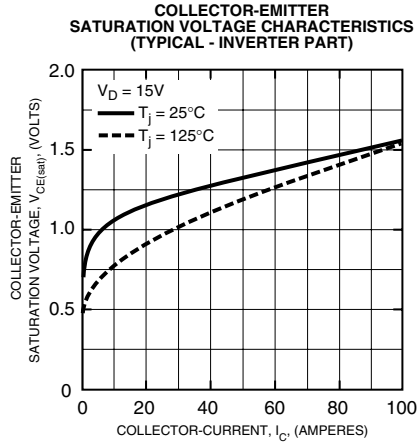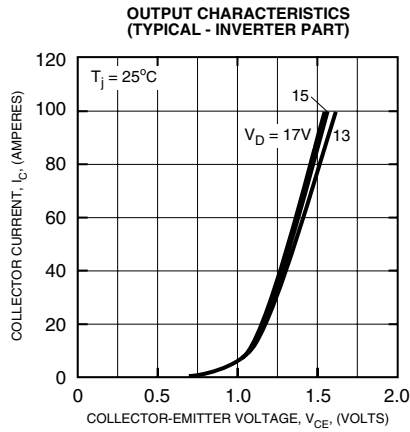

PM100RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
100 Amperes/600 Volts

