


Photologic® Slotted Optical Switch OPB916 Series



Features:

- Low power consumption
- Data rates to 250 kBaud
- Choice of two logic states and two electrical outputs
- 24" (610 mm) minimum 26 AWG UL listed wires
- Slot width 0.20" (5.08 mm)
- Slot Depth 0.635" (16.13 mm)

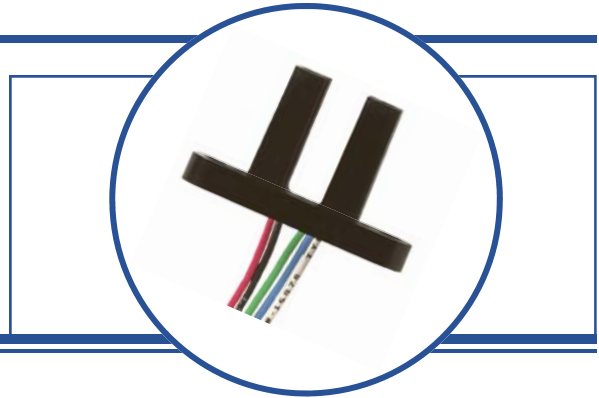

Description:

The **OPB916** series of Photologic® photo integrated circuit switches provide optimum flexibility. Each switch consists of an infrared Light Emitting Diode (LED) and a Photologic® photo integrated circuit, mounted in an opaque housing with clear windows for dust protection. The deep slot allows for a longer reach of the optical path from the 0.650" (16.5 mm) mounting plane. Internal apertures are 0.010" x .060" (.25 mm x 1.52 mm) for the Photologic's "S" side and 0.05" x 0.06" (1.27 mm x 1.52 mm) for the LED "E" side.

Devices in this series exhibit stable performance over supply voltages ranging from 4.5 V to 16.0 V, and may be specified as buffered or inverted with an internal 10 kΩ pull-up resistor or open collector output. Devices are TTL/ LSTTL compatible and can drive up to 10 TTL loads.

Custom electrical, wire or cabling are available. Contact your local representative or OPTEK for more information.


Applications:

- Mechanical switch replacement
- Speed indication (tachometer)
- Mechanical limit indication
- Edge sensing


Ordering Information					
Part Number	LED Peak Wavelength	Sensor Photologic®	Slot Width / Depth	Aperture Emitter / Sensor	Lead Length / Wire
OPB916BZ	880 nm	10K Pull-Up	0.200" / 0.635"	0.05" / 0.01"	24" / 26 AWG Wire
OPB916IZ		Inv-10K Pull-Up			
OPB916BOCZ		Open-Collector			
OPB916IOCZ		Inv-Open-Collector			

Color	Description
Red	Anode
Black	Cathode
White	Vcc
Blue	Output
Green	Ground


OPB916B 10K Pull-Up

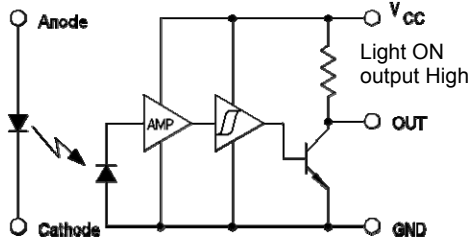


OPB916BOC Open-Collector

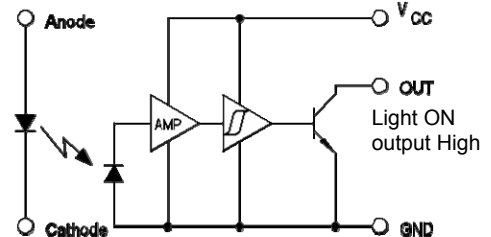

OPB916I Inverted 10K Pull-Up

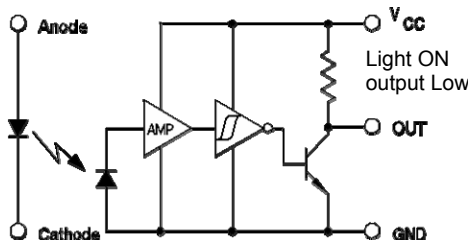


OPB916IOC Inverted Open-Collector

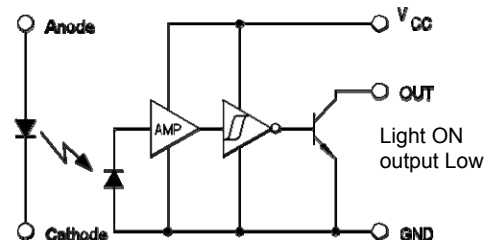

RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

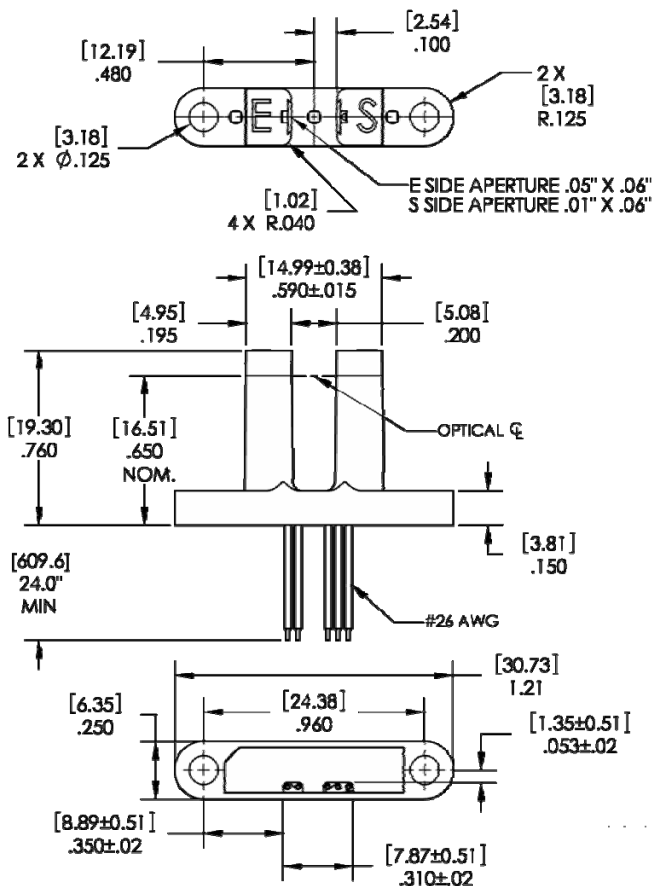

Color-Pin #	Description
Red	Anode
Black	Cathode
Green	Ground
Blue	Output
White	V _{CC}

Tolerance ±0.010 [0.254]

DIMENSIONS ARE IN: [MILLIMETERS]
 [INCHES]

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Storage & Operating Temperature Range	-40°C to +80°C
---------------------------------------	----------------

Input Infrared LED

Diode Reverse DC Voltage	2 V
Input Diode Power Dissipation ⁽²⁾	75 mW
Forward DC Current	50 mA

Output Photologic®

Supply Voltage, V _{CC} (not to exceed 3 seconds)	18 V
Voltage at Output Lead (Open Collector Output)	30 V
Output Photologic® Power Dissipation ⁽³⁾	90 mW

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly 1.67 mW/°C above 25°.
- (3) Derate linearly 2.67 mW/°C above 25°.
- (4) Normal application would be with light source blocked, simulated by I_F = 0 mA.
- (5) All parameters tested using pulse technique.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYM-BOL	PARAMETER	MIN	TYP	MAX	UNIT S	TEST CONDITIONS
---------	-----------	-----	-----	-----	--------	-----------------

Input Diode

V_F	Forward Voltage	-	1.3	1.8	V	$I_F = 20\text{ mA}$
I_R	Reverse Current	-	-	100	μA	$V_R = 2\text{ V}, T_A = 25^\circ\text{ C}$

Output Photologic® Sensor


V_{CC}	Operating DC Supply Voltage	4.5	-	16	V	-
I_{CCL}	Low Level Supply Current: Buffered with 10k pull-up ⁽¹⁾ Buffered Open-Collector Output ⁽¹⁾	-	-	7	mA	$V_{CC} = 16\text{ V}, I_F = 0\text{ mA}, \text{ No Output Load}$
	Inverted with 10k pull-up: Inverted Open-Collector Output	-	-	7	mA	$V_{CC} = 16\text{ V}, I_F = 10\text{ mA}, \text{ No Output Load}$
I_{CCH}	High Level Supply Current: Buffered with 10k pull-up Buffered Open-Collector Output	-	-	6	mA	$V_{CC} = 16\text{ V}, I_F = 10\text{ mA}, \text{ No Output Load}$
	Inverted with 10k pull-up: Inverted Open-Collector Output ⁽¹⁾	-	-	6	mA	$V_{CC} = 16\text{ V}, I_F = 0\text{ mA}, \text{ No Output Load}$
V_{OL}	Low Level Output Voltage: Buffered with 10k pull-up Buffered Open-Collector Output	-	-	0.4	V	$V_{CC} = 4.5\text{ V}, I_{OL} = 16\text{ mA}, I_F = 0\text{ mA}$
	Inverted with 10k pull-up: Inverted Open-Collector Output	-	-	0.4	V	$V_{CC} = 4.5\text{ V}, I_{OL} = 16\text{ mA}, I_F = 10\text{ mA}$
V_{OH}	High Level Output Voltage: Buffered with 10k pull-up	$V_{CC}-2.0$	-	-	V	$V_{CC} = 4.5\text{ V to } 16\text{ V}, I_F = 10\text{ mA}, I_{OH} = 100\text{ }\mu\text{A}$
	Inverted with 10k pull-up:	$V_{CC}-2.0$	-	-	V	$V_{CC} = 4.5\text{ V to } 16\text{ V}, I_F = 0\text{ mA},$
I_{OH}	High Level Output Current: Buffered with 10k pull-up Buffered Open-Collector Output	-	1.0	10	μA	$V_{CC} = 4.5\text{ V}, I_F = 10\text{ mA}, V_{OH} = 30\text{ V}$
	Inverted with 10k pull-up: Inverted Open-Collector Output ⁽¹⁾	-	1.0	10	μA	$V_{CC} = 4.5\text{ V}, I_F = 0\text{ mA}, V_{OH} = 30\text{ V}$
$I_{F(+)}$	LED Positive-Going Threshold Current Buffered with 10k pull-up Inverted with 10k pull-up	-	5	10	mA	$V_{CC} = 5\text{ V}, \text{ No Output Load}$
	Buffered Open-Collector Output Inverted Open-Collector Output ⁽¹⁾	-	5	10	mA	$V_{CC} = 4.5\text{ V}, I_{OL} = 16\text{ mA}$
$I_{F(+)} / I_{F(-)}$	Hysteresis	-	1.5	-	-	$V_{CC} = 5\text{ V}$
$t_{r/f}$	Rise Time, Fall Time	-	50	-	ns	$V_{CC} = 5\text{ V}, I_F = 0\text{ or } 10\text{ mA}, R_L = 300\text{ }\Omega\text{ to } 5\text{ V}, C_L = 50\text{ pF}$
t_{PLH} / t_{PHL}	Propagation Delay	-	3	-	μs	

Notes:


- (1) Normal application would be with light source blocked, simulated by $I_F = 0\text{ mA}$.
- (2) All parameters tested using pulse technique.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.



OPB916B - Flag Next to Emitter

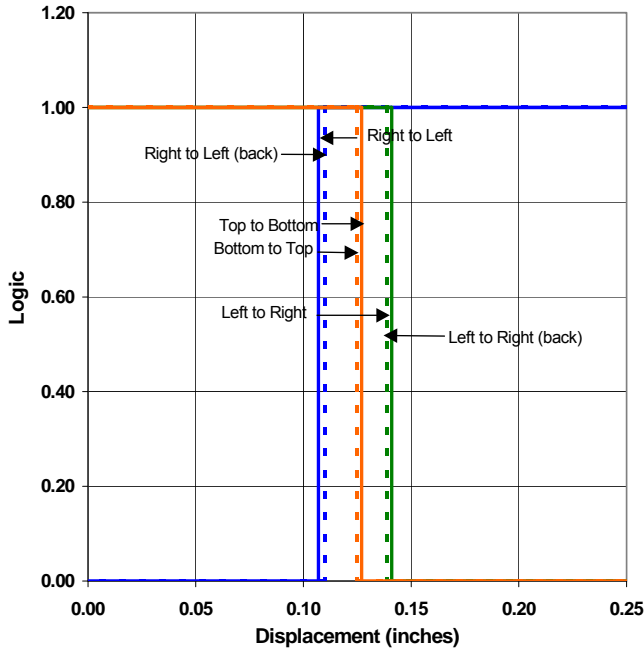

OPB916B - Flag Next to Sensor

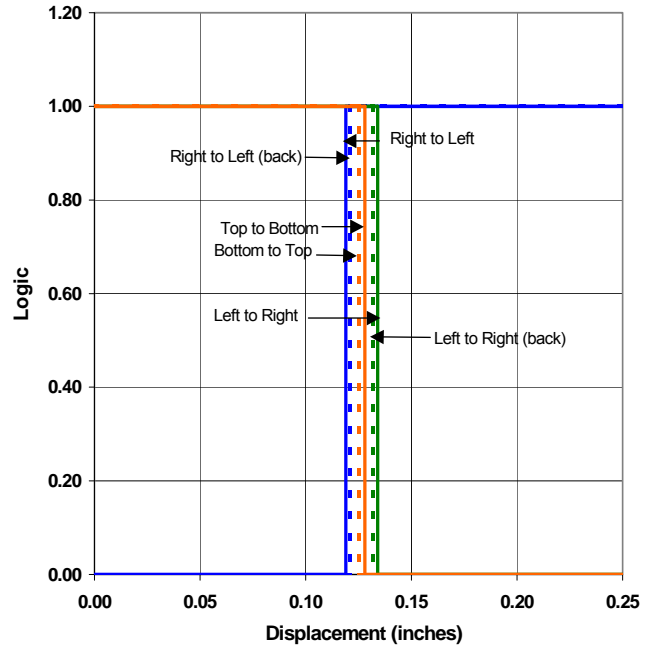

OPB916B - Flag in Middle of Slot

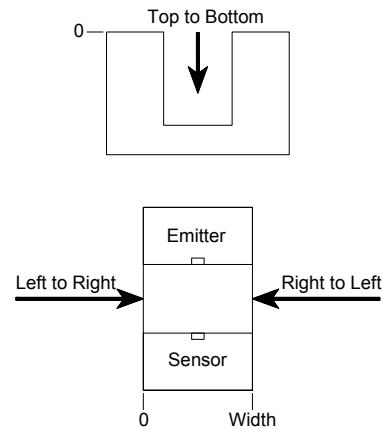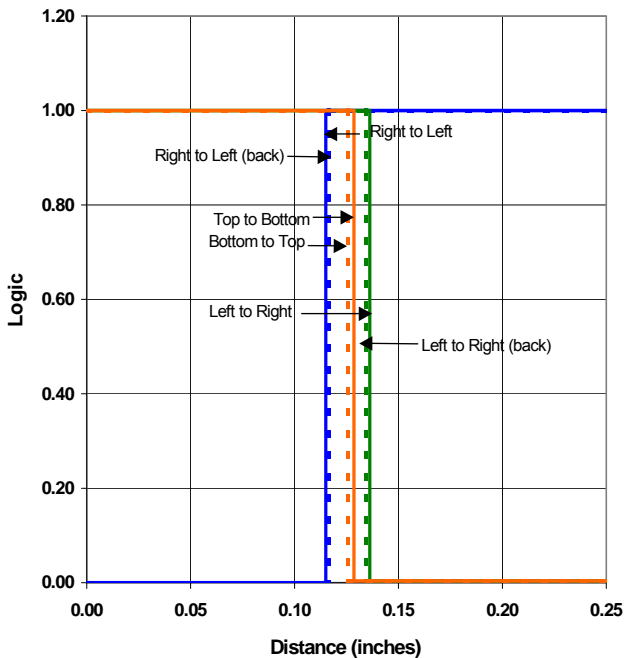

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.