
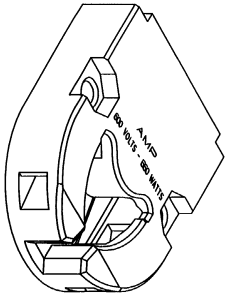
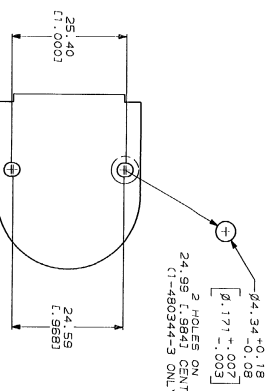





3-DIMENSIONAL MODEL  
 3-D  
 1:34:51:51 AMP17795 - 771102-0002 (2/06/2024) - 480344-3  
 30-148-53

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY
1	08/05/19	OBSELETE 1-3 PER 0282-53		

1. ACCEPTS T-8 OR T-12 TUBE WITH MEDIUM BIPIN BASE. RATING: 600 VOLTS, 680 WATTS.
2. USE OF #4 HEXAGON NUT LIMITS THE CENTERLINE TO CENTERLINE MOUNTING TO 25.40 (1.000).
4. DIMENSIONS IN BRACKETS ARE IN INCHES.



3-DIMENSIONAL MODEL  
 NTS



RECOMMENDED CUT OUT PANEL  
 FOR 1.52 (1.060) MAX THICK PANEL



OBSELETE	WITH TWO 4.34 DIA HOLES WITH TWO 3.02 (1.19) SLOTS	PHENOLIC BLACK	1-480344-3
REMARKS		MATERIAL & QUOTE	PART NO
DO NOT SCALE PRINT.	DATE: 4/28/96	AMP Incorporated	480344-3
UNLESS SPECIFIED DIMENSIONS ARE IN INCHES.	DR: C. MARTIN	NEW Bldg 9, PA 17105-8608	
TOLERANCES ON:	DATE: 8/26/96		
FRACTIONS: 1/16"	APPD: 4/20/96		
DECIMALS: 0.01"	DATE: 8/26/96		
MILS: 0.005"	APPD: 0.000		
ANGLES: ± 0.1° (1.000)	PRODUCT SPEC:		
OTHER: ± 0.005"			
APPROVAL:	SEE TABLE		
NAME:		SOCKET, FLUORESCENT TUBE	
DATE:			
APP: 0.000			
PRODUCT SPEC:			
DATE:			
APP: 0.000			
PRODUCT SPEC:			
DATE:			
APP: 0.000			
PRODUCT SPEC:			
DATE:			
APP: 0.000			
PRODUCT SPEC:			

CUSTOMER DRAWING