


Pulse transformer with double secondary winding



- Galvanic separation of drive and power circuit
- Voltage resistance up to 4kV
- Ignition current up to 1A
- Turns ratio up to 3:1:1


Approvals



Technical specifications

Nominal operating voltage:	Up to 500V
Operating frequency:	40kHz max. 500kHz max. for data transmission
Ignition currents:	0.025 to 1A @ 40°C
Rise time:	0.4 to 4.0µs
Test voltage:	$U_p/50\text{Hz}/2\text{s}$ max. according to VDE 110b
Max. partial discharge voltage:	$1.5 \times U_{\text{nom}}$
Temperature range (operation and storage):	-25°C to +70°C (25/70/21)
Flammability corresponding to:	UL 94V-0 listed materials

Typical electrical schematic



IT pulse transformers are designed to offer you galvanic isolation for transformer coupled gate drives. The IT series provides negligible delays and the possibility of voltage scaling. They are available with single or double secondary winding for multiple gate drives. Choosing the IT product line brings you the rapid availability of a standard gate drive transformer. A wide selection on turns ratio, ignition current and voltages are designed to offer you the desired standard product.

Features and benefits

- Galvanic separation with secondary winding.
- Voltage resistance up to 4kV.
- Allows high potential difference voltage scaling.
- Vacuum potting.
- Very low partial discharge effects.
- PCB through hole mounting.
- Custom-specific versions on request.

Typical applications

- Gate drive circuit
- Power supplies
- Power converters
- Frequency converters
- Switching applications
- DC/DC converters
- Line coupling transformers in high-speed data transmission

Pulse transformer selection table


Pulse transformer	Turns ratio	Ignition current I_{ign} [A]	Voltage		Voltage time area V_{ot} [V μ s]	Rise time t_r [μ s]	Inductance		Resistance		Coupling capacitance C_k [pF]	Input/Output connections	Weight [g]
			U_{nom} [V]	U_p [kV]			L_p [mH]	L_{str} [μ H]	R_p [Ω]	R_s [Ω]			
IT 143	1:1:1	0.025	500	4	800	0.6	15	200	3	3	10	02	14
IT 242	1:1:1	0.1	500	3.2	250	0.9	2.5	75	0.75	0.75	7	02	6
IT 243	1:1:1	0.1	500	3.2	250	1	2.5	85	0.8	0.8	7	02	6
IT 213	1:1:1	0.25	380	2.5	450	0.4	6.5	20	1.4	1.4	40	02	9
IT 233	1:1:1	0.25	500	4	300	1.3	3	45	0.8	0.8	7	02	13
IT 253	1:1:1	0.25	500	3.2	160	1.3	1.1	45	0.55	0.55	6	02	6
IT 312	1:1:1	0.25	380	2.5	1200	1	21	35	2.4	2.7	30	02	24
IT 313	1:1:1	1	380	2.5	450	0.6	3	6	0.33	0.4	27	02	24
IT 249	2:1:1	0.25	500	3.2	330	4	17	140	3.1	1.5	9	02	6
IT 154	3:1:1	0.1	500	4	600	1.3	75	180	7.5	2.2	9	02	14
IT 244	3:1:1	0.1	500	3.2	200	0.7	15	70	2.8	0.9	9	02	6
IT 234	3:1:1	0.25	500	4	280	1	17	40	2	0.7	9	02	13
IT 314	3:1:1	1	380	2.5	500	1	35	20	1.6	0.7	30	02	25

Explanations:


- t_r rise time at given load resistor R and 70% of the output pulse height.
- L_p primary inductance measured at 1kHz (secondary coils open).
- L_{str} stray inductance measured at the secondary side, short circuit at the primary side. If there are several secondary coils only one at the time is connected (measuring frequency 10kHz).
- The ignition current is a set peak value where the voltage drop over the coil resistance is still insignificant (mostly below 1V).

Mechanical data


IT 213

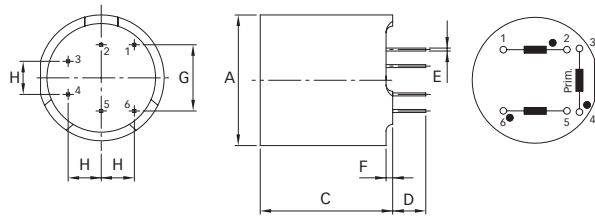


IT 243, IT 244, IT 249, IT 253

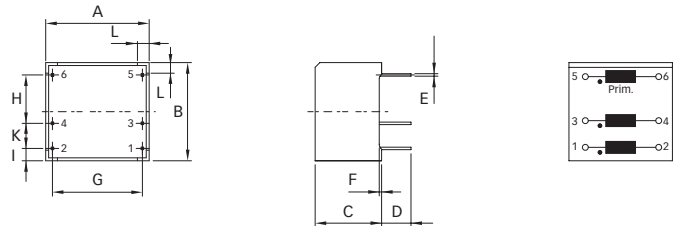


IT 242

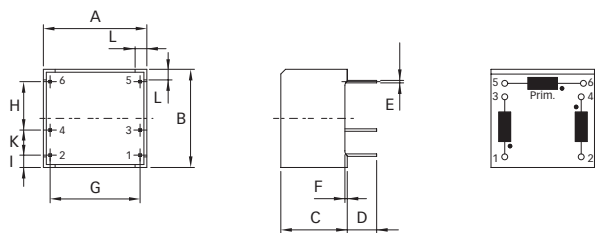

IT 143, IT 154, IT 233, IT 234

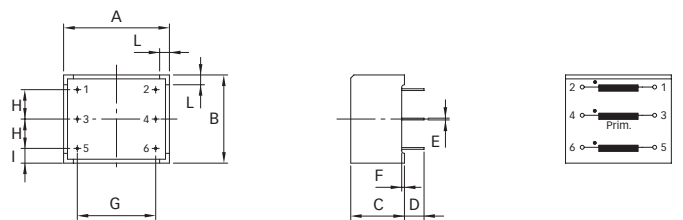

IT 312, IT 313, IT 314

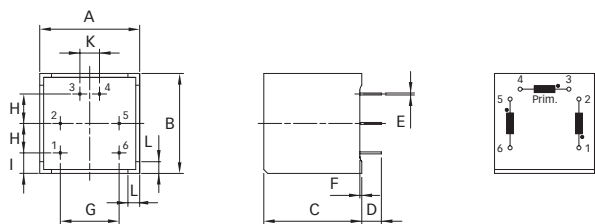

Dimensions

	IT 213	IT 243	IT 244	IT 249	IT 253	IT 242	IT 143	IT 154	IT 233	IT 234	IT 312	IT 313	IT 314	Tol.
A	Ø19	17.6	17.6	17.6	17.6	17.6	27*	27*	27*	27*	25.5*	25.5*	25.5*	±0.1
B		16.7	16.7	16.7	16.7	16.7	22.5*	22.5*	22.5*	22.5*	25.5*	25.5*	25.5*	±0.1
C	20	11.3	11.3	11.3	11.3	11.3	13.7	13.7	13.7	13.7	25*	25*	25*	±0.1
D	5	5	5	5	5	5	5	5	5	5	5	5	5	+1/-0
E	∅0.45	∅0.42	∅0.42	∅0.42	∅0.42	∅0.42	∅0.45	∅0.45	∅0.45	∅0.45	∅0.5	∅0.5	∅0.5	
F	1	0.4	0.4	0.4	0.4	0.4	0.7	0.7	0.7	0.7	0.5	0.5	0.5	
G	10	15.3	15.3	15.3	15.3	15.3	20	20	20	20	15	15	15	
H	5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	±0.2
I		2.1	2.1	2.1	2.1	2.1	3.75	3.75	3.75	3.75	5.25	5.25	5.25	±0.2
K		5	5	5	5	5					5	5	5	±0.2
L		2	2	2	2	2	2.5	2.5	2.5	2.5	3	3	3	

* Tolerance is ±0.2

All dimensions in mm; 1 inch = 25.4mm

Tolerances according: ISO 2768-m / EN 22768-m

Headquarters

Schaffner EMV AG
4542 Luterbach
Switzerland
T +41 32 681 66 26
F +41 32 681 66 41
sales@schaffner.com
www.schaffner.com

China

Schaffner EMC Ltd. Shanghai
T +86 21 6813 9855
cschina@schaffner.com

Finland

Schaffner Oy
T +358 19 357 271
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.
T +33 1 34 34 30 60
francesales@schaffner.com

Germany

**Schaffner Deutschland GmbH
Vertrieb Karlsruhe**
T +49 721 56910
germanysales@schaffner.com

Schaffner Deutschland GmbH
T +49 2951 6001 0
buerensales@schaffner.com

**Schaffner Deutschland GmbH
Nuertingen Branch**
T +49 7022 21789 0
nuertingensales@schaffner.com

Italy

Schaffner EMC S.r.l.
T +39 02 66 04 30 45
italysales@schaffner.com

Japan

Schaffner EMC K.K.
T +81 3 5712 3650
japansales@schaffner.com

Singapore

Schaffner EMC Pte Ltd.
T +65 6377 3283
singaporesales@schaffner.com

Spain

Schaffner EMC España
T +34 618 176 133
spainsales@schaffner.com

Sweden

Schaffner EMC AB
T +46 8 5792 1121
swedensales@schaffner.com

Switzerland

Schaffner EMV AG
T +41 32 681 66 26
sales@schaffner.ch

Taiwan

Schaffner EMV Ltd.
T +886 2 87525050
taiwansales@schaffner.com

Thailand

Schaffner EMC Co. Ltd.
T +66 53 58 11 04
thailandsales@schaffner.com

UK

Schaffner Ltd.
T +44 118 9770070
uksales@schaffner.com

USA

Schaffner EMC Inc.
T +1 732 225 9533
Toll free 1 800 367 5566
usasales@schaffner.com

To find your local partner within Schaffner's global network, please go to

www.schaffner.com

May 2010

© 2010 Schaffner EMC.
Specifications subject to change without notice. All trademarks recognized.

Schaffner is an ISO-registered company. Its products are designed and manufactured under the strict quality and environmental requirements of the ISO 9001 and ISO 14001 standards.

This document has been carefully checked. However, Schaffner does not assume any liability for errors or inaccuracies.