

# XC6202 Series

(High Voltage) Positive Voltage Regulators



- ◆ CMOS Low Power Consumption
- ◆ Operational Voltage Range : up to 20V
- ◆ Dropout Voltage : 200mV @ 30mA,  
670mV @ 100mA
- ◆ Maximum Output Current : more than 150mA
- ◆ Highly Accurate : ±2%
- ◆ Output Voltage Range : 1.8V ~ 18.0V
- ◆ Current Limiter Circuit Built-In
- ◆ SOT-23 / SOT-89 / TO-92 / SOT-223 / USP-6B Package
- ◆ Low ESR Capacitor can be used

## General Description

The XC6202 series are highly precise, low power consumption, high voltage, positive voltage regulators manufactured using CMOS and laser trimming technologies. The XC6202 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit.


Output voltage is selectable in 0.1V steps from 1.8V ~ 18V.

The series is also compatible with low ESR ceramic capacitors which give added output stability.

Since the current limiter circuit is built-in, the IC is protected against overshoot currents at such times of output shorts etc.

SOT-23(150mW), SOT-89(500mW), TO-92(300mW), SOT-223 (1200mW) and USP-6B (100mW) packages are available.

## Typical Application Circuit

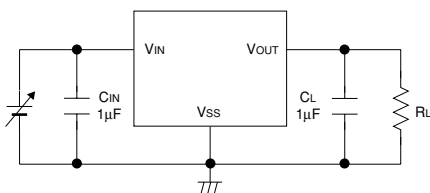

## Applications

- Battery Powered Equipment
- Reference Voltage Sources
- Cameras, Video Cameras
- Palmtops


3

## Features

- Maximum Output Current : 150mA
- Dropout Voltage : 200mV @ 30mA
- Operational Voltage Range : up to 20V
- Output Voltage Range : 1.8V ~ 18V (selectable in 0.1V steps)
- Highly Accurate : ±2%
- Low Power Consumption : TYP 10 µA (V<sub>OUT</sub>=3.3V)
- Operational Temperature Range : -40°C ~ 85°C
- Line Regulation : TYP 0.01% / V
- Ultra Small Packages : SOT-23 (150mW), SOT-89 (500mW), TO-92 (300mW), SOT-223 (1200mW), USP-6B (100mW)


Low ESR Capacitor Compatible : ceramic capacitor

## Typical Performance Characteristic




## XC6202 Series


### Pin Configuration




SOT-23  
(TOP VIEW)




SOT-89  
(TOP VIEW)



TO-92  
(TOP VIEW)



SOT-223  
(TOP VIEW)



USP-6B  
(TOP VIEW)

3

### Pin Assignment

PIN NUMBER			PIN NAME	FUNCTION
SOT-23	SOT-89/TO-92/SOT-223	USP-6B		
1	1	3	VOUT	Output
3	2	5	VSS	Ground
2	3	1	VIN	Power Input
—	—	2,4	NC	No connection
—	—	6	NC	No connection

## ■Product Classification

### ●Ordering Information


XC6202P①②③④⑤

DESIGNATOR	SYMBOL	DESCRIPTION
①②	18 ~ J0	Output Voltage For the voltage above 10V, see the example 10=A, 11=B, 12=C, 13=D, 14=E, 15=F, 16=G, 17=H, 18=J e.g. Vout= 3.0V → ①:3, ②:0 Vout= 12V → ①:C, ②:0 Vout= 15V → ①:F, ②:0
③	2	Accuracy : ±2%
④	M	Package : SOT-23
	P	SOT-89
	T	TO-92
	F	SOT-223
	D	USP-6B
⑤	R	Embossed Tape : Standard Feed
	L	Embossed Tape : Reverse Feed
	H	Paper Tape
	B	Bag

3


## ■Packaging Information

### ●SOT-23




## XC6202 Series

### ●SOT-89

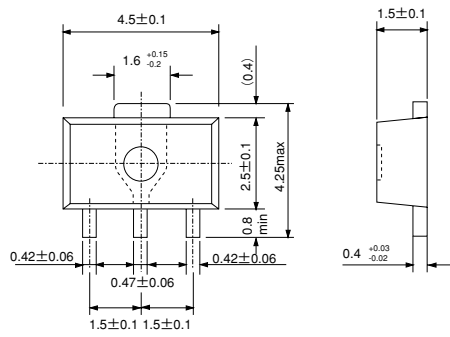


3

### ●TO-92

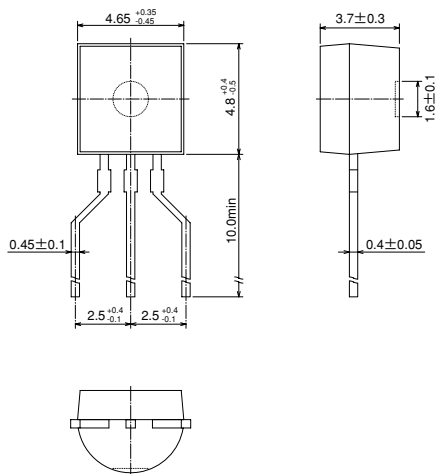


**XC6202**  
Series

●SOT-223

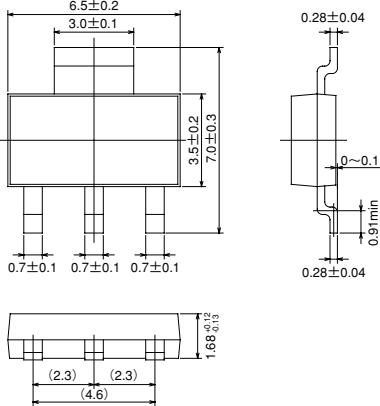

3


●USP-6B

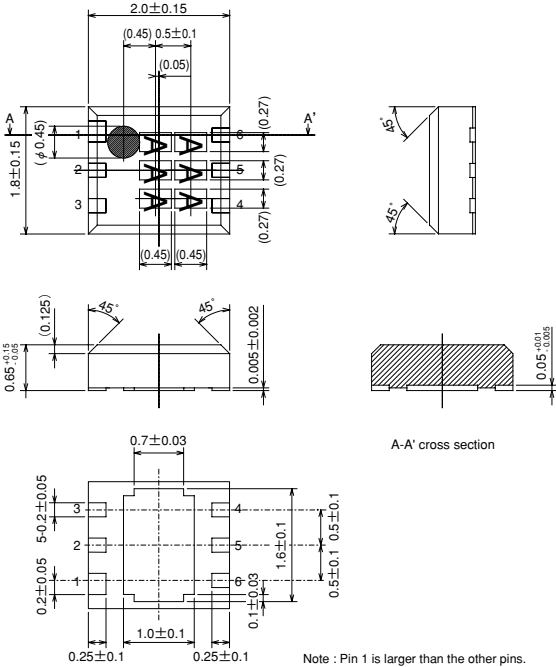

## XC6202 Series

### ■ Marking

● SOT-23, SOT-89, SOT-223

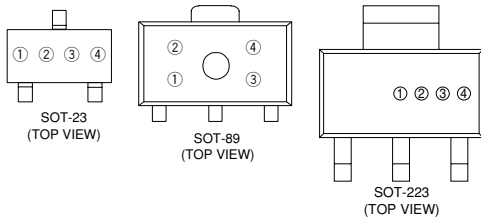

3

① Represents the product name

DESIGNATOR	PRODUCT NAME
2	XC6202P*****

② Represents the Output Voltage Range


DESIGNATOR	VOLTAGE (V)	PRODUCT NAME
4	0.1~3.0	XC6202P*****
5	3.1~6.0	
6	6.1~9.0	
7	9.1~12.0	
8	12.1~15.0	
9	15.1~18.0	

③ Represents the integer of the Output Voltage

DESIGNATOR	VOLTAGE (V)						DESIGNATOR	VOLTAGE					
	—	3.1	6.1	9.1	12.1	15.1		—	4.6	7.6	10.6	13.6	16.6
1	—	3.2	6.2	9.2	12.2	15.2	H	—	4.7	7.7	10.7	13.7	16.7
2	—	3.3	6.3	9.3	12.3	15.3	K	1.8	4.8	7.8	10.8	13.8	16.8
3	—	3.4	6.4	9.4	12.4	15.4	L	1.9	4.9	7.9	10.9	13.9	16.9
4	—	3.5	6.5	9.5	12.5	15.5	M	2.0	5.0	8.0	11.0	14.0	17.0
5	—	3.6	6.6	9.6	12.6	15.6	N	2.1	5.1	8.1	11.1	14.1	17.1
6	—	3.7	6.7	9.7	12.7	15.7	P	2.2	5.2	8.2	11.2	14.2	17.2
7	—	3.8	6.8	9.8	12.8	15.8	R	2.3	5.3	8.3	11.3	14.3	17.3
8	—	3.9	6.9	9.9	12.9	15.9	S	2.4	5.4	8.4	11.4	14.4	17.4
9	—	4.0	7.0	10.0	13.0	16.0	T	2.5	5.5	8.5	11.5	14.5	17.5
A	—	4.1	7.1	10.1	13.1	16.1	U	2.6	5.6	8.6	11.6	14.6	17.6
B	—	4.2	7.2	10.2	13.2	16.2	V	2.7	5.7	8.7	11.7	14.7	17.7
C	—	4.3	7.3	10.3	13.3	16.3	X	2.8	5.8	8.8	11.8	14.8	17.8
D	—	4.4	7.4	10.4	13.4	16.4	Y	2.9	5.9	8.9	11.9	14.9	17.9
E	—	4.5	7.5	10.5	13.5	16.5	Z	3.0	6.0	9.0	12.0	15.0	18.0

④ Denotes the production lot number  
0 to 9, A to Z repeated(G.I.J.O.Q.W excepted)

●TO-92 (T Type)



3

① Represents the type of regulator

DESIGNATOR	PRODUCT NAME
P	XC6202P * * * * *

② Represents the integer of the Output Voltage

DESIGNATOR	VOLTAGE (V)	PRODUCT NAME	DESIGNATOR	VOLTAGE (V)	PRODUCT NAME
1	1.X	XC6202P1 * * * * *	A	10.X	XC6202PA * * * * *
2	2.X	XC6202P2 * * * * *	B	11.X	XC6202PB * * * * *
3	3.X	XC6202P3 * * * * *	C	12.X	XC6202PC * * * * *
4	4.X	XC6202P4 * * * * *	D	13.X	XC6202PD * * * * *
5	5.X	XC6202P5 * * * * *	E	14.X	XC6202PE * * * * *
6	6.X	XC6202P6 * * * * *	F	15.X	XC6202PF * * * * *
7	7.X	XC6202P7 * * * * *	G	16.X	XC6202PG * * * * *
8	8.X	XC6202P8 * * * * *	H	17.X	XC6202PH * * * * *
9	9.X	XC6202P9 * * * * *	J	18.X	XC6202PJ * * * * *

③ Represents the decimal number of Output Voltage

DESIGNATOR	VOLTAGE (V)	PRODUCT NAME
3	X.3	XC6202P * 3 * * * *
0	X.0	XC6202P * 0 * * * *

④ Represents the Detect Voltage Accuracy

DESIGNATOR	DETECT VOLTAGE ACCURACY	PRODUCT NAME
2	within $\pm 2\%$	XC6202P * * 2 * *
1	within $\pm 1\%$	XC6202P * * 1 * *


⑤ Represents a least significant digit of the produced year

DESIGNATOR	PRODUCED YEAR
0	2000
1	2001

⑥ Denotes the production lot number  
0 to 9, A to Z repeated(G,I,J,O,Q,W excepted)  
Note: Character inversion is not used

## XC6202 Series

### ●USP-6B



USP6B  
(TOP VIEW)

①② Represents the product series

DESIGNATOR		PRODUCT NAME
①	②	
0	2	XC6202P***D*

③ Represents the type of regulator

DESIGNATOR	PRODUCT NAME
P	XC6202P***D*

④ Represents the integer of the Output Voltage

DESIGNATOR	VOLTAGE (V)	PRODUCT NAME	DESIGNATOR	VOLTAGE (V)	PRODUCT NAME
1	1.X	XC6202P1***D*	A	10.X	XC6202PA***D*
2	2.X	XC6202P2***D*	B	11.X	XC6202PB***D*
3	3.X	XC6202P3***D*	C	12.X	XC6202PC***D*
4	4.X	XC6202P4***D*	D	13.X	XC6202PD***D*
5	5.X	XC6202P5***D*	E	14.X	XC6202PE***D*
6	6.X	XC6202P6***D*	F	15.X	XC6202PF***D*
7	7.X	XC6202P7***D*	G	16.X	XC6202PG***D*
8	8.X	XC6202P8***D*	H	17.X	XC6202PH***D*
9	9.X	XC6202P9***D*	J	18.X	XC6202PJ***D*

⑤ Represents the decimal number of Output Voltage


DESIGNATOR	VOLTAGE (V)	PRODUCT NAME
3	X.3	XC6202P*3*D*
0	X.0	XC6202P*0*D*

⑥ Denotes the production lot number  
0 to 9, A to Z repeated(G,I,J,O,Q,W excepted)  
Note: Character inversion is not used

3



**Block Diagram**

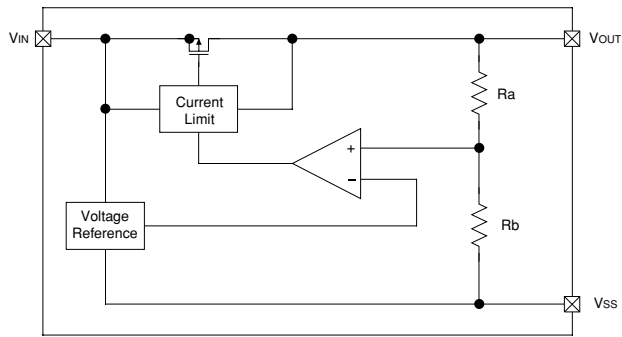

3

**Absolute Maximum Ratings**

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	VIN	22	V
Output Current	IOUT	500	mA
Output Voltage	VOUT	VSS-0.3~VIN+0.3	V
Power Dissipation	SOT-23	Pd	150
	SOT-89		500
	TO-92		300
	USP-6B		100
	SOT-223		1,200 *note
Operating Ambient Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-55~+125	°C

Note: Circuits board mounting : Double-sided board

## XC6202 Series

### Electrical Characteristics

XC6202P182  $V_{OUT}(T)=1.8V$  (Note 1)

$T_{opr}=25^{\circ}C$

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	$V_{OUT}(E)$ (Note 2)	$V_{IN}=2.8V$ $I_{OUT}=30mA$	1.764	1.800	1.836	V	2
Maximum Output Current	$I_{OUTmax}$	$V_{IN}=2.8V$ $V_{OUT} \geq V_{OUT}(E) \times 0.9$	60			mA	2
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=2.8V$ $1mA \leq I_{OUT} \leq 100mA$		10	80	mV	2
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT}=30mA$		340	470	mV	2
	$V_{dif2}$	$I_{OUT}=100mA$		1000	1500		
Supply Current	$I_{SS}$	$V_{IN}=2.8V$		10	24	$\mu A$	1
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=1mA$ $2.8V \leq V_{IN} \leq 20V$		0.01	0.2	%/V	2
Input Voltage	$V_{IN}$				20	V	—
Output Voltage	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=30mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$		$\pm 100$		ppm/ $^{\circ}C$	2
Short-circuit Current	$I_{lim}$	$V_{IN}=3.8V$		40		mA	2

XC6202P332  $V_{OUT}(T)=3.3V$  (Note 1)

$T_{opr}=25^{\circ}C$

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	$V_{OUT}(E)$ (Note 2)	$V_{IN}=4.3V$ $I_{OUT}=30mA$	3.234	3.300	3.366	V	2
Maximum Output Current	$I_{OUTmax}$	$V_{IN}=4.3V$ $V_{OUT} \geq V_{OUT}(E) \times 0.9$	150			mA	2
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=4.3V$ $1mA \leq I_{OUT} \leq 100mA$		25	90	mV	2
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT}=30mA$		200	280	mV	2
	$V_{dif2}$	$I_{OUT}=100mA$		670	900		
Supply Current	$I_{SS}$	$V_{IN}=4.3V$		10	24	$\mu A$	1
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=1mA$ $4.3V \leq V_{IN} \leq 20V$		0.01	0.2	%/V	2
Input Voltage	$V_{IN}$				20	V	—
Output Voltage	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=30mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$		$\pm 100$		ppm/ $^{\circ}C$	2
Short-circuit Current	$I_{lim}$	$V_{IN}=5.3V$		40		mA	2

**XC6202**  
Series

**XC6202P502**  $V_{OUT}(T)=5.0V$  (Note 1) Topr=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	$V_{OUT}(E)$ (Note 2)	$V_{IN}=6V$ $I_{OUT}=30mA$	4.900	5.000	5.100	V	2
Maximum Output Current	$I_{OUTmax}$	$V_{IN}=6V$ $V_{OUT} \geq V_{OUT}(E) \times 0.9$	200			mA	2
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=6V$ $1mA \leq I_{OUT} \leq 100mA$		30	100	mV	2
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT}=30mA$		130	190	mV	2
	$V_{dif2}$	$I_{OUT}=100mA$		440	550		
Supply Current	$I_{SS}$	$V_{IN}=6V$		10	24	$\mu A$	1
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=1mA$ $6V \leq V_{IN} \leq 20V$		0.01	0.2	%/V	2
Input Voltage	$V_{IN}$				20	V	—
Output Voltage	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=30mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$		$\pm 100$		ppm/ °C	2
Short-circuit Current	$I_{lim}$	$V_{IN}=7V$		40		mA	2

3

**XC6202PC02**  $V_{OUT}(T)=12V$  (Note 1) Topr=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	$V_{OUT}(E)$ (Note 2)	$V_{IN}=13V$ $I_{OUT}=30mA$	11.760	12.000	12.240	V	2
Maximum Output Current	$I_{OUTmax}$	$V_{IN}=13V$ $V_{OUT} \geq V_{OUT}(E) \times 0.9$	200			mA	2
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=13V$ $1mA \leq I_{OUT} \leq 100mA$		60	230	mV	2
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT}=30mA$		90	150	mV	2
	$V_{dif2}$	$I_{OUT}=100mA$		290	380		
Supply Current	$I_{SS}$	$V_{IN}=13V$		12	28	$\mu A$	1
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=1mA$ $13V \leq V_{IN} \leq 20V$		0.01	0.2	%/V	2
Input Voltage	$V_{IN}$				20	V	—
Output Voltage	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=30mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$		$\pm 100$		ppm/ °C	2
Short-circuit Current	$I_{lim}$	$V_{IN}=14V$		40		mA	2

## XC6202 Series

XC6202PJ02  $V_{OUT}(T)=18V$  (Note 1)

$T_{opr}=25^{\circ}C$

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	$V_{OUT}(E)$ (Note 2)	$V_{IN}=19V$ $I_{OUT}=30mA$	17.640	18.000	18.360	V	2
Maximum Output Current	$I_{OUTmax}$	$V_{IN}=19V$ $V_{OUT} \geq V_{OUT}(E) \times 0.9$	200			mA	2
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=19V$ $1mA \leq I_{OUT} \leq 100mA$		120	380	mV	2
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT}=30mA$		80	150	mV	2
	$V_{dif2}$	$I_{OUT}=100mA$		280	380		
Supply Current	$I_{SS}$	$V_{IN}=19V$		15	30	$\mu A$	1
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=1mA$ $19V \leq V_{IN} \leq 20V$		0.01	0.2	%/V	2
Input Voltage	$V_{IN}$				20	V	—
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$	$I_{OUT}=30mA$ $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$		$\pm 100$		ppm/ $^{\circ}C$	2
Short-circuit Current	$I_{lim}$	$V_{IN}=20V$		40		mA	2

Note : 1.  $V_{OUT}(T)$  = Specified Output Voltage.

2.  $V_{OUT}(E)$  = Effective Output Voltage (i.e. the output voltage when " $V_{OUT}(T)+1.0V$ " is provided at the  $V_{IN}$  pin while maintaining certain  $I_{OUT}$  value).


3.  $V_{dif} = V_{IN1} - V_{OUT1}$

4.  $V_{OUT1}$  = A voltage equal to 98% of the output voltage when " $V_{OUT}(T)+1.0V$ " is input.e


5.  $V_{IN1}$  = The input voltage when  $V_{OUT1}$  is output following a gradual decrease in the input voltage.

### Test Circuits

CIRCUIT 1




CIRCUIT 2

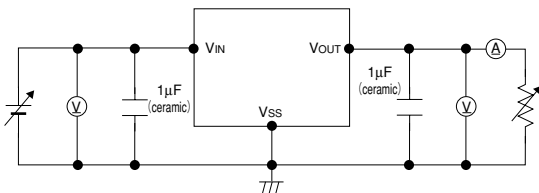

**Typical Performance Characteristics**



●XC6202P182

(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




3

(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE





(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




## XC6202 Series

### (4) SUPPLY CURRENT vs. INPUT VOLTAGE




3


### (5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE





### (6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE



### (7) CURRENT LIMITER CIRCUIT





**(8) INPUT TRANSIENT RESPONSE 1**




3

**(9) INPUT TRANSIENT RESPONSE 2**






**(10) LOAD TRANSIENT RESPONSE**



## XC6202 Series


### (11) RIPPLE REJECTION RATE







●XC6202P332

(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




3

(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE





(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




## XC6202 Series

### (4) SUPPLY CURRENT vs. INPUT VOLTAGE




3


### (5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE




### (6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE



### (7) CURRENT LIMITER CIRCUIT





**(8) INPUT TRANSIENT RESPONSE 1**




3

**(9) INPUT TRANSIENT RESPONSE 2**




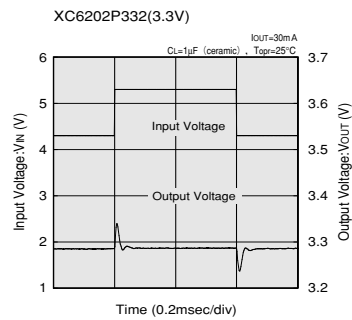



**(10) LOAD TRANSIENT RESPONSE**

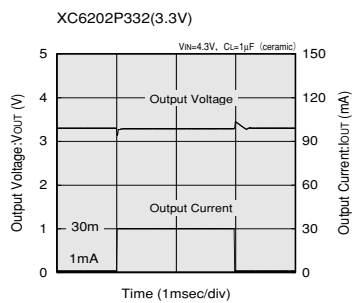


## XC6202 Series

### (11) RIPPLE REJECTION RATE





●XC6202P502

(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




3

(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE





(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




## XC6202 Series

### (4) SUPPLY CURRENT vs. INPUT VOLTAGE




3


### (5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE





### (6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE



### (7) CURRENT LIMITER CIRCUIT





(8) INPUT TRANSIENT RESPONSE 1




3

(9) INPUT TRANSIENT RESPONSE 2






(10) LOAD TRANSIENT RESPONSE



## XC6202 Series


### (11) RIPPLE REJECTION RATE







●XC6202PC02

(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




3

(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE





(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




## XC6202 Series

### (4) SUPPLY CURRENT vs. INPUT VOLTAGE




3


### (5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE





### (6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE



### (7) CURRENT LIMITER CIRCUIT





(8) INPUT TRANSIENT RESPONSE 1




3

(9) INPUT TRANSIENT RESPONSE 2






(10) LOAD TRANSIENT RESPONSE




## XC6202 Series

### (11) RIPPLE REJECTION RATE




●XC6202PJ02

(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE




3


(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




(4) SUPPLY CURRENT vs. INPUT VOLTAGE



(5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE




(6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE

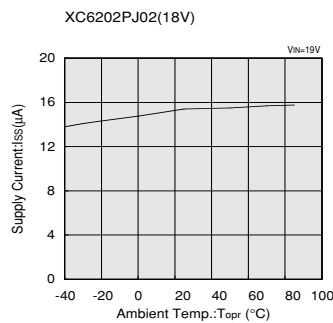



# XC6202 Series

## (7) CURRENT LIMITER CIRCUIT





3

## (8) INPUT TRANSIENT RESPONSE 1




## (9) INPUT TRANSIENT RESPONSE 2

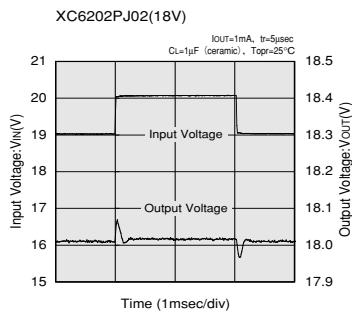

**(10) LOAD TRANSIENT RESPONSE**


XC6202PJ02(18V)

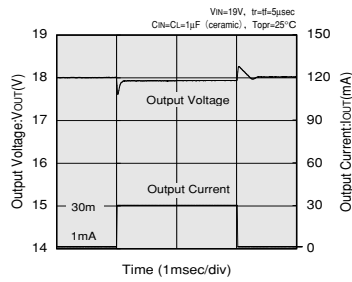


3

**(11) RIPPLE REJECTION RATE**

XC6202PJ02(18V)



XC6202PJ02(18V)



XC6202PJ02(18V)

