

Monitoring Relays 1-Phase True RMS AC/DC Over or Under Current Types DIB01, PIB01



DIB01



PIB01

- TRMS AC/DC over or under current monitoring relay
- Current measuring through internal shunt
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 mA to 10 A AC/DC
- Adjustable current on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DIB01) or plug-in module (PIB01)
- 22.5 mm Euronorm housing (DIB01) or 36 mm plug-in module (PIB01)
- LED indication for relay, alarm and power supply ON
- Galvanically separated power supply

Product Description

DIB01 and PIB01 are precise TRMS AC/DC over or under current (selectable by DIP-switch) monitoring relays. Direct measuring or through current transformer. Owing to the built-in latch function, the ON-position of the relay output can be maintained. Inhibit function

can be used to avoid relay operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay. Through the built-in shunt it is possible to monitor loads up to 10 A AC/DC.

Ordering Key

DIB 01 C B23 5A



Type Selection

Mounting	Output	Measuring range	Supply: 24 to 48 VAC/DC		Supply: 115/230 VAC	
			DIB 01 C D48 5mA	DIB 01 C D48 50mA	DIB 01 C B23 5mA	DIB 01 C B23 50mA
DIN-rail	SPDT	0.1 to 5 mA AC/DC	DIB 01 C D48 500mA	DIB 01 C B23 500mA	DIB 01 C B23 5A	DIB 01 C B23 10A
		1 to 50 mA AC/DC	DIB 01 C D48 5A	DIB 01 C B23 5A	DIB 01 C B23 10A	DIB 01 C B23 10A
Plug-in	SPDT	10 to 500 mA AC/DC	DIB 01 C D48 10A	DIB 01 C B23 10A	PIB 01 C B23 5mA	PIB 01 C B23 50mA
		0.1 to 5 A AC/DC	PIB 01 C D48 5mA	PIB 01 C B23 5mA	PIB 01 C B23 500mA	PIB 01 C B23 5A
		1 to 10 A AC/DC	PIB 01 C D48 50mA	PIB 01 C B23 500mA	PIB 01 C B23 5A	PIB 01 C B23 10A
		0.1 to 5 mA AC/DC	PIB 01 C D48 5A	PIB 01 C B23 5A	PIB 01 C B23 5A	PIB 01 C B23 10A
		1 to 50 mA AC/DC	PIB 01 C D48 10A	PIB 01 C B23 10A		
		10 to 500 mA AC/DC				
		0.1 to 5 A AC/DC				
		1 to 10 A AC/DC				

Input Specifications

Input (current level)	Terminals Y1, Y2	Measuring ranges (cont.)		Internal resist.	Max. curr.	
DIB01	Terminals 5, 7	..500MA:	10 to 100 mA AC/DC	0.5 Ω	700 mA	
PIB01	Terminals 5, 7		20 to 200 mA AC/DC	0.5 Ω	700 mA	
Measuring ranges	Internal resist.	Max. curr.	50 to 500 mA AC/DC	0.5 Ω	700 mA	
			Max. current for 1 s	0.5 Ω	1.4 A	
Direct			..5A:	0.1 to 1 A AC/DC	0.05 Ω	6 A
Selectable by DIP-switch				0.2 to 2 A AC/DC	0.05 Ω	6 A
..5MA:	50 Ω	50 mA		0.5 to 5 A AC/DC	0.05 Ω	6 A
0.2 to 2 mA AC/DC	50 Ω	50 mA		Max. current for 1 s		15 A
0.5 to 5 mA AC/DC	50 Ω	50 mA	..10A:	1 to 10 A AC/DC	3 mΩ	11 A
Max. current for 1 s		100 mA		Max. current for 1 s		50 A
..50MA:	5 Ω	150 mA				
1 to 10 mA AC/DC	5 Ω	150 mA				
2 to 20 mA AC/DC	5 Ω	150 mA				
5 to 50 mA AC/DC	5 Ω	150 mA				
Max. current for 1 s		500 mA				



Input Specifications (cont.)

Measuring ranges (cont.)			
Standard CT (examples)		AAC_{rms}	Max. curr.
TADK2	50 A/5 A	5 to 50 A	60 A
TAD2	150 A/5 A	15 to 150 A	180 A
TAD6	400 A/5 A	40 to 400 A	480 A
TAD12	1000 A/5 A	100 to 1000 A	1200 A
TACO200	6000 A/5 A	600 to 6000 A	7200 A
Note: The input voltage cannot raise over 300 VAC/DC with respect to ground (PIB01 only)			
Contact input			
DIB01		Terminals Z1, Y1	
PIB01		Terminals 8, 9	
Disabled		> 10 kΩ	
Enabled		< 500 Ω	
Latch disable		> 500 ms	

Output Specifications

Output	SPDT relay
Rated insulation voltage	250 VAC
Contact ratings (AgSnO ₂)	μ
Resistive loads	AC 1
	DC 12
Small inductive loads	AC 15
	DC 13
Mechanical life	≥ 30 x 10 ⁶ operations
Electrical life	≥ 10 ⁵ operations (at 8 A, 250 V, cos φ = 1)
Operating frequency	≤ 7200 operations/h
Dielectric strength	
Dielectric voltage	≥ 2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)

Supply Specifications

Power supply	Overvoltage cat. III (IEC 60664, IEC 60038)	
Rated operational voltage through terminals:		
A1, A2 or A3, A2 (DIB01)		
2, 10 or 11, 10 (PIB01)		
D48:	24 to 48 VAC/DC ± 15%	
	45 to 65 Hz, insulated	
B23:	115/230 VAC ± 15%	
	45 to 65 Hz, insulated	
Dielectric voltage	DC supply	AC supply
Supply to input	2 kV	4 kV
Supply to output	4 kV	4 kV
Input to output	4 kV	4 kV
Rated operational power		
AC	4 VA	
DC	3 W	

General Specifications

Power ON delay	1 s ± 0.5 s or 6 s ± 0.5 s
Reaction time	(input signal variation from -20% to +20% or from +20% to -20% of set value)
Alarm ON delay	< 100 ms
Alarm OFF delay	< 100 ms
Accuracy	(15 min warm-up time)
Temperature drift	± 1000 ppm/°C
Delay ON alarm	± 10% on set value ± 50 ms
Repeatability	± 0.5% on full-scale
Indication for	
Power supply ON	LED, green
Alarm ON	LED, red (flashing 2 Hz during delay time)
Output relay ON	LED, yellow
Environment	(EN 60529)
Degree of protection	IP 20
Pollution degree	3 (DIB01), 2 (PIB01)
Operating temperature	-20 to 60°C, R.H. < 95%
Storage temperature	-30 to 80°C, R.H. < 95%
Housing	
Dimensions	DIB01 22.5 x 80 x 99.5 mm PIB01 36 x 80 x 94 mm
Weight	Approx. 150 g
Screw terminals	
Tightening torque	Max. 0.5 Nm acc. to IEC 60947
Approvals	UL, CSA
CE Marking	Yes
EMC	
Immunity	Electromagnetic Compatibility
Emission	According to EN 61000-6-2 According to EN 61000-6-3

Mode of Operation

DIB01 and PIB01 monitor both AC and DC over or under current through an internal shunt.

Example 1

(connection between terminals Z1, Y1 or 8, 9 - latching function enabled)

The relay operates and latches in operating position when the measured value

exceeds (or drops below) the set level for more than the set delay time. Provided that the current has dropped below (or has exceeded) the set point (see hysteresis setting), the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted or the power supply is interrupted as well.

The red LED flashes until the

delay time has expired or the measured value comes back to a non-alarm value (see hysteresis setting).

Example 2 (Standard CT)

(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the measured value exceeds (or drops below) the set level for

more than the set delay time. It releases when the current drops below (or exceeds) the set level (see hysteresis setting) or when power supply is interrupted.

Note

When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay activation.

Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 as shown below (except for models DIB01xxx10A and PIB01xxx10A). Select the desired function setting the DIP switches 3 to 6 (1 to 4 for DIB01xxx10A and PIB01xxx10A) as shown below.

To access the DIP switches open the grey plastic cover as shown below.

Selection of level and time delay:

Upper knob:


Setting of hysteresis on relative scale: 0 to 30% on set value.

Centre knob:

Current level setting on relative scale: 10 to 110% on full scale.

Lower knob:


Setting of delay on alarm time on absolute scale (0.1 to 30 s).

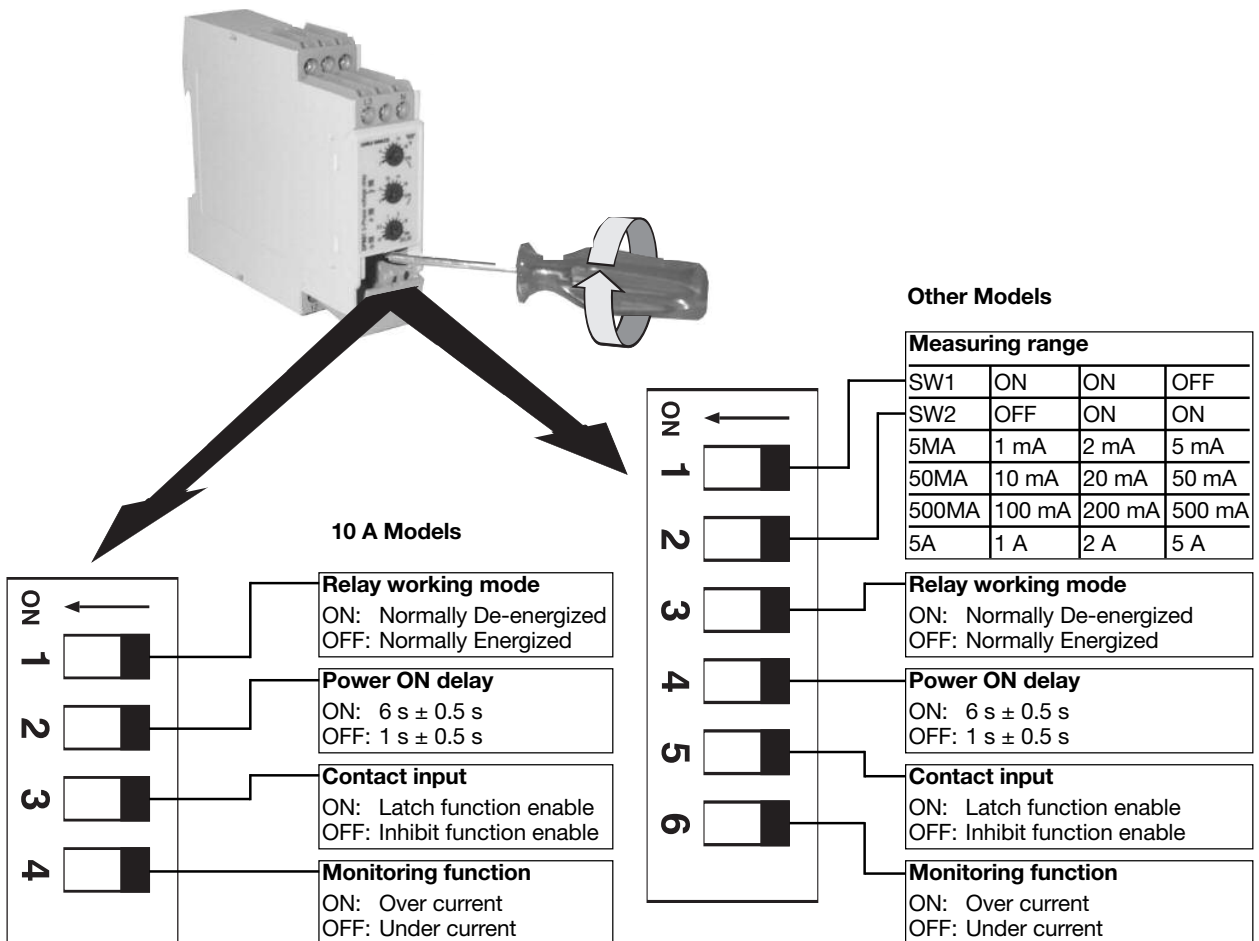




Operation Diagrams


Over current - N.D. relay

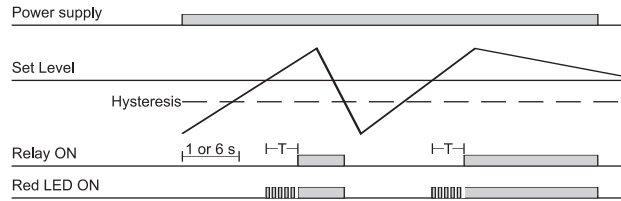


Under current - Latch function - N.D. relay

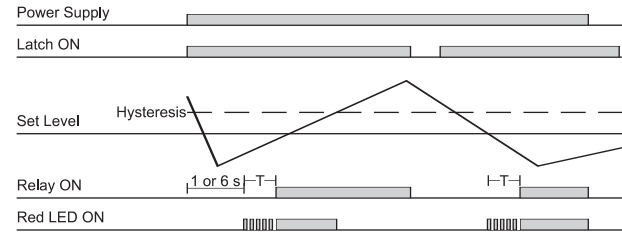



Under current - N.D. relay

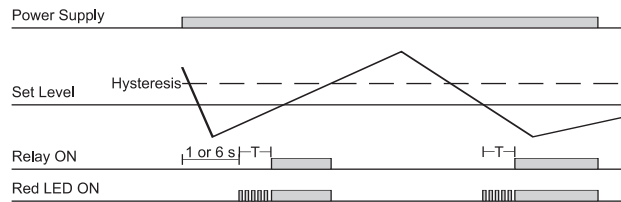

Over current - Inhibit function - N.D. relay

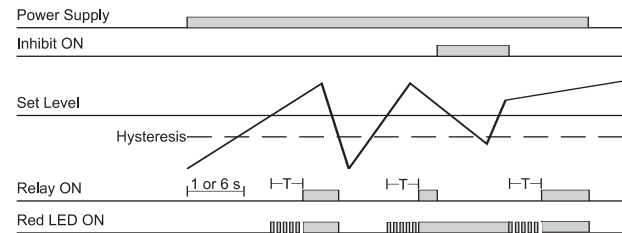

Wiring Diagrams

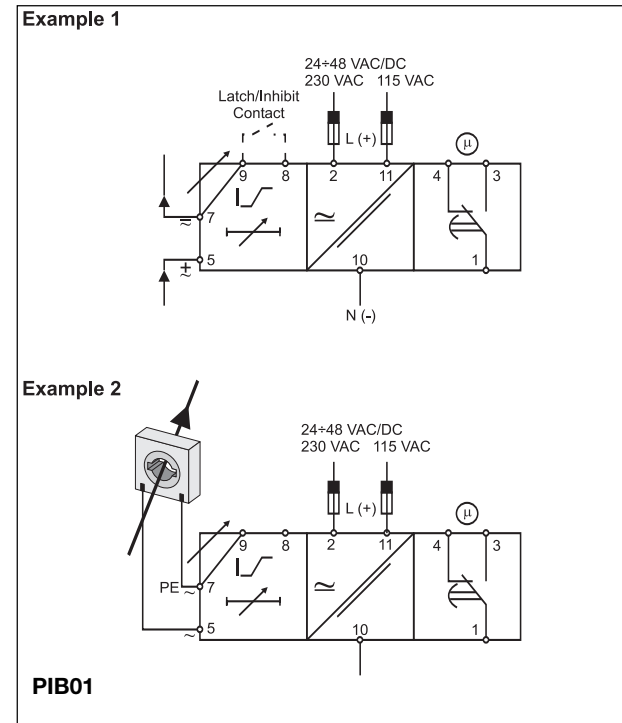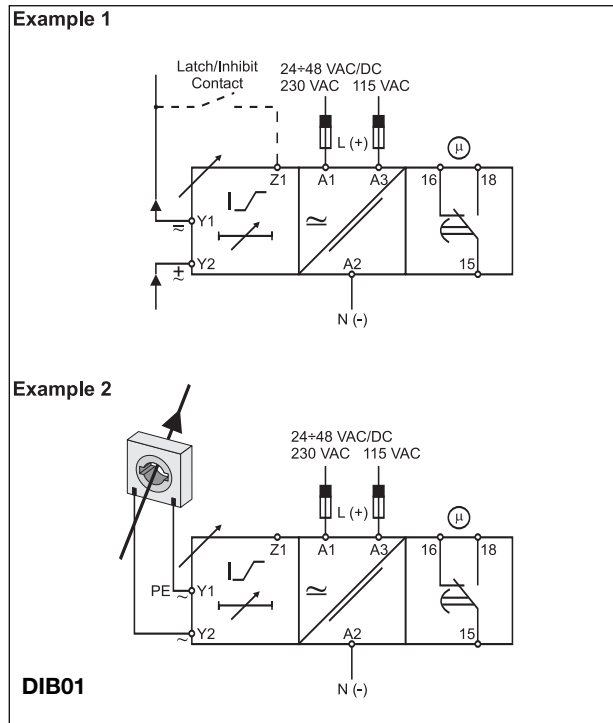

Dimensions

