

### ARN Series – Mono-Lever Switches

**Mono-Lever Switches Ø 1-13/64" (30mm)**

**Contact Blocks Rated for 600V, 10A**

**Key features of the ARN Series include:**


- Available in 2-, 3-, and 4-positions.
- Maintained and spring-return modes available.
- Models available with interlock mechanism to prevent inadvertent actuation.



**Specifications**

<b>Operating Temperature</b>	-25° to 50°C (without freezing)
<b>Insulation Resistance</b>	100MΩ
<b>Contact Rating</b>	<b>Rated Voltage: Current</b> 110VDC: 3A 24V AC/DC: 10A 120VAC: 10A 240VAC: 6A 480VAC: 2A 600VAC: 1A
	<b>Insulation Voltage</b> 600V AC/DC
	<b>Rated Thermal Current</b> 10A
	<b>Electrical Life</b> Over 500,000 operations

**Part Numbering Guide (Assembled)**

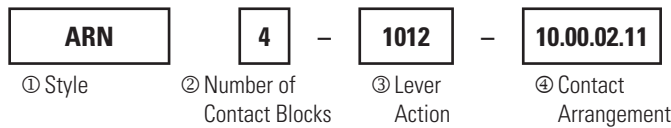

	Description	Code	Remarks
① Style	Standard Lever	ARN	
	Short Lever	ARNS	Interlocking lever prevents inadvertent operation.
	Interlocking Lever	ARNL	
② No. of Contact Blocks	—	1	Each contact block contains two independent contacts.
		2	
		3	
		4	
③ Lever Action	Blocked	0	Specify in this order: Up.Right.Down.Left
	Maintained	1	
	Spring Return	2	
④ Contact Arrangement	No contacts	00	Specify the number of contacts to be activated in all active (non-blocked) positions: Up.Right.Down.Left For blocked positions use code: 00
	1 NO contact	10	
	1 NC contact	01	
	1 NO and 1 NC contact	11	
	2 NO contacts	20	

Switches & Pilot Lights

Display Lights

Relays & Sockets

Timers

Terminal Blocks

Circuit Breakers

**Mono-Lever Switches (Sub-Assembled)**



**Standard Mono-Lever Operators**

Operator Type	Lever Operation Mode	Part Number
Standard Lever	2-Position manual return 3-Position manual return 4-Position manual return	ARNO-1010-B
		ARNO-1110-B
		ARNO-1111-B
	2-Position spring return 3-Position spring return 4-Position spring return	ARNO-2020-B
		ARNO-2220-B
		ARNO-2222-B
Short Lever	2-Position manual return 3-Position manual return 4-Position manual return	ARNSO-1010-B
		ARNSO-1110-B
		ARNSO-1111-B
	2-Position spring return 3-Position spring return 4-Position spring return	ARNSO-2020-B
		ARNSO-2220-B
		ARNSO-2222-B
Interlocking Lever	2-Position manual return 3-Position manual return 4-Position manual return	ARNLO-1010-B
		ARNLO-1110-B
		ARNLO-1111-B
	2-Position spring return 3-Position spring return 4-Position spring return	ARNLO-2020-B
		ARNLO-2220-B
		ARNLO-2222-B

**Contact Blocks**





Item	Contact Arrangement	Part Number
	2NO contacts 1NO & 1NC contact 2NC contacts 1NO early make contact	BR-1E BR-2E BR-3E BR-1EM

To calculate the number of contact blocks required, add the number of NO and NC contacts on each pair of adjoining positions (up + right, right + down, down + left, and left + up). The largest of the four sums is the number of contact blocks required. Up to four contact blocks can be mounted.

**Replacement Parts**

Item	Part Number
	ARNO, ARNSO (standard & short lever) ARNL-BL
	ARNLO (Interlocking) ARNL-BL (comes in 2 pieces)
	All Models Knob (ball) ARNB-B

Dimensions — ARN Series

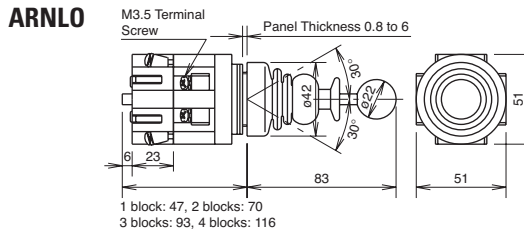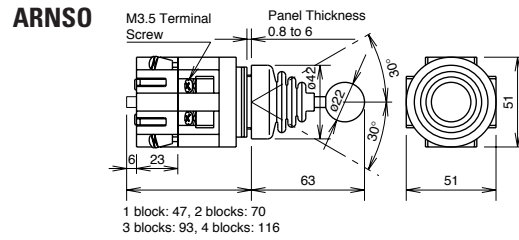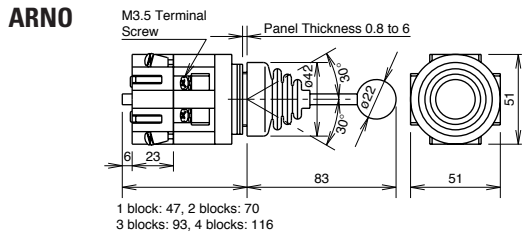

Switches & Pilot Lights

Display Lights

Relays & Sockets

Timers

Terminal Blocks

Circuit Breakers