


# GXL SERIES

## Micro-size Inductive Proximity Sensor **Amplifier Built-in**



High performance  
in micro-size design

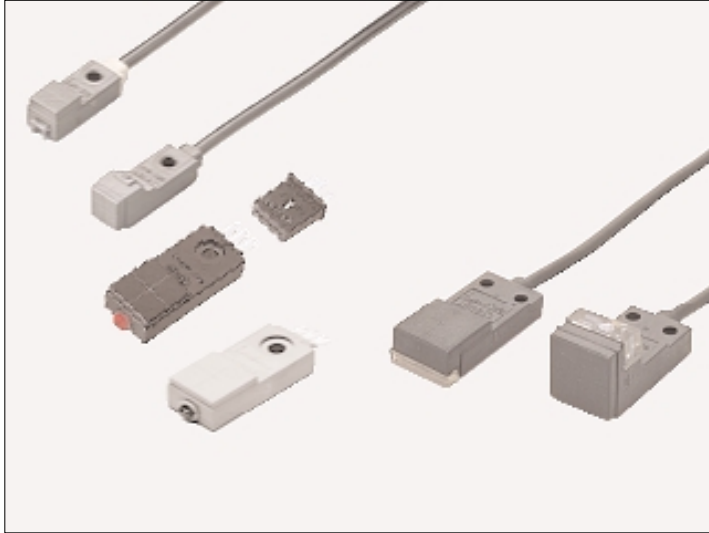

### Wide model variety

Models ranging from extremely compact type to long sensing range type are available to suit various applications.

### Versatile mounting

Since the sensor is fingertip size, it can be mounted in a tight space.




### Reduced wiring operation


The wiring cost of the DC 2-wire type is 2/3 that of a conventional model. Besides, the possibility of miswiring is reduced.

Particularly convenient when many sensors are used.

Wiring of the 3-wire type is cumbersome.




Wiring of the 2-wire type is simple and neat.



### Flexible cable type


The bending durability of its cable is ten times that of the conventional model. The sensor can be mounted on a moving table or a robot arm.

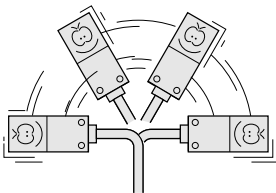


※ Except PNP output type and 5 m 16.404 ft cable attached NPN output type

APPLICATIONS


Detecting wafer frame



Detecting aluminum pallet

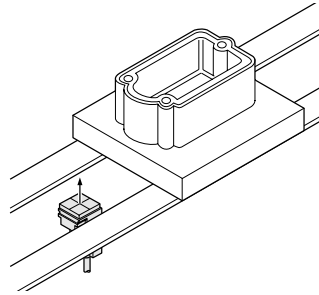

Code reading

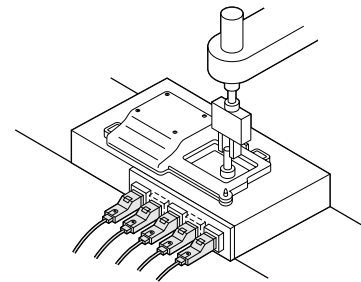

ORDER GUIDE

GXL-8 type

Type	Appearance (mm in)	Sensing range (Note 1)	Model No. (Note 2)	Output	Output operation
DC 2-wire		Maximum operation distance 2.5 mm 0.098 in	GXL-8FU	Non-contact DC 2-wire type	Normally open
			GXL-8FUI		Normally closed
			GXL-8FUB		Normally open
			GXL-8FUIB		Normally closed
			GXL-8HU		Normally open
			GXL-8HUI		Normally closed
NPN output		(0 to 1.8 mm) (0 to 0.071 in) Stable sensing range	GXL-8HUB	NPN open-collector transistor	Normally open
			GXL-8F		Normally closed
			GXL-8FI		Normally open
			GXL-8FB		Normally closed
			GXL-8FIB		Normally open
			GXL-8H		Normally closed
			GXL-8HI		Normally open
			GXL-8HB		Normally closed
			GXL-8HIB		Normally open
			GXL-8HIB		Normally closed

Notes: 1) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object. The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.  
 2) 'I' in the model No. indicates a different frequency type.

GXL-N12 type

Type	Appearance (mm in)	Sensing range (Note 1)	Model No. (Note 2)	Output	Output operation
NPN output		Maximum operation distance 3 mm 0.118 in	GXL-N12F (Note 3)	NPN open-collector transistor	Normally open
			GXL-N12FI (Note 3)		Normally closed
			GXL-N12FB		Normally open
			GXL-N12FIB		Normally closed
			GXL-N12FT (Note 3)		Normally open
			GXL-N12FTI (Note 3)		Normally closed
PNP output		(0 to 2 mm) (0 to 0.079 in) Stable sensing range	GXL-N12F-P	PNP open-collector transistor	Normally open
			GXL-N12FI-P		Normally closed
			GXL-N12FB-P		Normally open
			GXL-N12FIB-P		Normally closed
			GXL-N12FT-P		Normally open
			GXL-N12FTI-P		Normally closed

Notes: 1) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object. The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.  
 2) 'I' in the model No. indicates a different frequency type.  
 3) These models, with normally open NPN output, are also available as 5 V supply voltage type. Please contact our office for details.

GXL

GL-6

GL-8/8U

GL-N12

Amplifier Built-in

GL-18H/18HL

GX-U/FU

GX-N

GX

Amplifier-separated

GA-10/GH

## ORDER GUIDE

### GXL-15 (Standard) type


Type	Appearance (mm in)	Sensing range (Note 1)	Model No. (Note 2)	Output	Output operation		
DC 2-wire	Front sensing 	<p>Maximum operation distance 5 mm 0.197 in (0 to 4 mm) (0 to 0.157 in) Stable sensing range</p>	GXL-15FU	Non-contact DC 2-wire type	Normally open		
	Top sensing 		GXL-15FUI		Normally closed		
NPN output			Front sensing 		GXL-15FUB	NPN open-collector transistor	Normally open
	Top sensing 		GXL-15FUIB		Normally closed		
NPN output			Front sensing 		GXL-15HU		PNP open-collector transistor
	GXL-15HUI				Normally closed		
	Top sensing 		GXL-15HUB	Normally open			
			GXL-15HUIB	Normally closed			
	PNP output		Front sensing 	GXL-15F	Normally open		
				GXL-15FI	Normally closed		
PNP output	Top sensing 		GXL-15FB	PNP open-collector transistor	Normally open		
			GXL-15FIB		Normally closed		
	Front sensing 	GXL-15H	Normally open				
		GXL-15HIB	Normally closed				
PNP output	Front sensing 	GXL-15F-P	PNP open-collector transistor	Normally open			
		GXL-15FI-P		Normally closed			
		GXL-15FIB-P		Normally closed			

Notes: 1) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.  
The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.  
2) '1' in the model No. indicates a different frequency type.

### GXL-15 (Long sensing range) type ... For mounting on non-magnetic material (Note 3)

Type	Appearance (mm in)	Sensing range (Note 1)	Model No. (Note 2)	Output	Output operation		
DC 2-wire	Front sensing 	<p>Maximum operation distance 8 mm 0.315 in (0 to 6.4 mm) (0 to 0.252 in) Stable sensing range</p>	GXL-15FLU	Non-contact DC 2-wire type	Normally open		
	Top sensing 		GXL-15FLUI		Normally closed		
NPN output			Front sensing 		GXL-15FLUB	NPN open-collector transistor	Normally open
	Top sensing 		GXL-15HLU		Normally closed		
NPN output			Front sensing 		GXL-15HLUI		PNP open-collector transistor
	GXL-15HLUB				Normally closed		
	Top sensing 		GXL-15HL	Normally open			
			GXL-15HLI	Normally closed			
	PNP output		Front sensing 	GXL-15HLB	PNP open-collector transistor	Normally open	
				GXL-15HLIB		Normally closed	

Notes: 1) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.  
The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.  
2) '1' in the model No. indicates a different frequency type.  
3) To mount the long sensing range GXL-15 on a magnetic body, such as iron, the enclosed aluminum sheet, or any other aluminum sheet having a minimum size of 30 × 39.5 × t 0.3 mm 1.181 × 1.555 × t 0.012 in (GXL-15HLU□ / GXL-15HL□): 30 × 30 × t 0.3 mm 1.181 × 1.181 × t 0.012 in), should be inserted between the sensor and the magnetic body.  
However, it is not necessary to use the aluminum sheet when mounting on a non-magnetic body, such as, aluminum or an insulator.



**ORDER GUIDE**

**Flexible cable type and 5 m 16.404 ft cable length type**

Flexible cable type and 5 m 16.404 ft cable length type (standard: 1 m 3.281 ft) are also available.

• **Table of Model Nos.**

Type	Standard	Flexible cable type	5 m 16.404 ft cable length type	Flexible cable & 5 m 16.404 ft cable length type	
DC 2-wire	Front sensing	GXL-8FU	GXL-8FU-R	GXL-8FU-C5	GXL-8FU-R-C5
		GXL-8FUI	GXL-8FUI-R	GXL-8FUI-C5	GXL-8FUI-R-C5
		GXL-8FUB	GXL-8FUB-R	GXL-8FUB-C5	GXL-8FUB-R-C5
	Top sensing	GXL-8FUIB	GXL-8FUIB-R	GXL-8FUIB-C5	GXL-8FUIB-R-C5
		GXL-8HU	GXL-8HU-R	GXL-8HU-C5	GXL-8HU-R-C5
		GXL-8HUI	GXL-8HUI-R	GXL-8HUI-C5	GXL-8HUI-R-C5
	Front sensing	GXL-8HUB	GXL-8HUB-R	GXL-8HUB-C5	GXL-8HUB-R-C5
		GXL-8HUIB	GXL-8HUIB-R	GXL-8HUIB-C5	GXL-8HUIB-R-C5
		GXL-15FU	GXL-15FU-R	GXL-15FU-C5	GXL-15FU-R-C5
	Top sensing	GXL-15FUI	GXL-15FUI-R	GXL-15FUI-C5	GXL-15FUI-R-C5
		GXL-15FUB	GXL-15FUB-R	GXL-15FUB-C5	GXL-15FUB-R-C5
		GXL-15FUIB	GXL-15FUIB-R	GXL-15FUIB-C5	GXL-15FUIB-R-C5
	Front sensing	GXL-15HU	GXL-15HU-R	GXL-15HU-C5	GXL-15HU-R-C5
		GXL-15HUI	GXL-15HUI-R	GXL-15HUI-C5	GXL-15HUI-R-C5
		GXL-15HUB	GXL-15HUB-R	GXL-15HUB-C5	GXL-15HUB-R-C5
	Top sensing	GXL-15HUIB	GXL-15HUIB-R	GXL-15HUIB-C5	GXL-15HUIB-R-C5
		GXL-15FLU	GXL-15FLU-R	GXL-15FLU-C5	GXL-15FLU-R-C5
		GXL-15FLUI	GXL-15FLUI-R	GXL-15FLUI-C5	GXL-15FLUI-R-C5
	Front sensing	GXL-15FLUB	GXL-15FLUB-R	GXL-15FLUB-C5	GXL-15FLUB-R-C5
		GXL-15FLUIB	GXL-15FLUIB-R	GXL-15FLUIB-C5	GXL-15FLUIB-R-C5
		GXL-15HLU	GXL-15HLU-R	GXL-15HLU-C5	GXL-15HLU-R-C5
	Top sensing	GXL-15HLUI	GXL-15HLUI-R	GXL-15HLUI-C5	GXL-15HLUI-R-C5
		GXL-15HLUB	GXL-15HLUB-R	GXL-15HLUB-C5	GXL-15HLUB-R-C5
		GXL-15HLUIB	GXL-15HLUIB-R	GXL-15HLUIB-C5	GXL-15HLUIB-R-C5
NPN output	Front sensing	GXL-8F	GXL-8F-R	GXL-8F-C5	GXL-8F-R-C5
		GXL-8FI	GXL-8FI-R	GXL-8FI-C5	GXL-8FI-R-C5
		GXL-8FB	GXL-8FB-R	GXL-8FB-C5	GXL-8FB-R-C5
	Top sensing	GXL-8FIB	GXL-8FIB-R	GXL-8FIB-C5	GXL-8FIB-R-C5
		GXL-8H	GXL-8H-R	GXL-8H-C5	
		GXL-8HI	GXL-8HI-R	GXL-8HI-C5	
	Front sensing	GXL-8HB	GXL-8HB-R	GXL-8HB-C5	
		GXL-8HIB	GXL-8HIB-R	GXL-8HIB-C5	
		GXL-N12F	GXL-N12F-R	GXL-N12F-C5	GXL-N12F-R-C5
	Top sensing	GXL-N12FI	GXL-N12FI-R	GXL-N12FI-C5	GXL-N12FI-R-C5
		GXL-N12FB	GXL-N12FB-R	GXL-N12FB-C5	GXL-N12FB-R-C5
		GXL-N12FIB	GXL-N12FIB-R	GXL-N12FIB-C5	GXL-N12FIB-R-C5
	Front sensing	GXL-N12FT			
		GXL-N12FTI			
		GXL-N12FTB			
	Top sensing	GXL-N12FTIB			
		GXL-15F	GXL-15F-R	GXL-15F-C5	GXL-15F-R-C5
		GXL-15FI	GXL-15FI-R	GXL-15FI-C5	GXL-15FI-R-C5
	Front sensing	GXL-15FB	GXL-15FB-R	GXL-15FB-C5	GXL-15FB-R-C5
		GXL-15FIB	GXL-15FIB-R	GXL-15FIB-C5	GXL-15FIB-R-C5
		GXL-15H		GXL-15H-C5	
	Top sensing	GXL-15HI			
		GXL-15HB		GXL-15HB-C5	
		GXL-15HIB			
Front sensing	GXL-15HL		GXL-15HL-C5		
	GXL-15HLI				
	GXL-15HLB				
Top sensing	GXL-15HLIB				
	GXL-N12F-P		GXL-N12F-P-C5		
	GXL-N12FI-P		GXL-N12FI-P-C5		
Front sensing	GXL-N12FB-P		GXL-N12FB-P-C5		
	GXL-N12FIB-P		GXL-N12FIB-P-C5		
	GXL-N12FT-P				
Top sensing	GXL-N12FTI-P				
	GXL-N12FTB-P				
	GXL-N12FTIB-P				
Front sensing	GXL-15F-P		GXL-15F-P-C5		
	GXL-15FI-P		GXL-15FI-P-C5		
	GXL-15FB-P		GXL-15FB-P-C5		
Top sensing	GXL-15FIB-P		GXL-15FIB-P-C5		

GXL

GL-6

GL-8/8U

GL-N12

Amplifier Built-in

GL-18H/18HL

GX-U/FU

GX-N

GX

Amplifier-separated


GA-10/GH

# GXL

## ORDER GUIDE


### Accessories

- **MS-GXL8**  
(Sensor mounting bracket for GXL-8F, GXL-8H type)

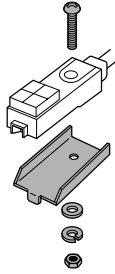

1 pc. each of screw, nut, spring washer and plain washer is attached.


- **MS-GXL8-4**  
(Sensor mounting bracket for GXL-8FU, GXL-8HU type)
- **MS-GXL12-1**  
(Sensor mounting bracket for GXL-N12 type)



1 pc. each of screw, nut, spring washer and plain washer is attached.

Not included with the **MS-GXL12-1**.  
(Bracket only)  
Please use only the items included with the sensor.

- **MS-A15F**  
(Aluminum sheet for GXL-15FLU type)
- **MS-A15H**  
(Aluminum sheet for GXL-15HLU, GXL-15HL type)




## OPTIONS

Designation	Model No.	Description
Connector	<b>CN-13</b>	Connector for the terminal type
	<b>CN-13-C1</b>	Length: 1 m 3.281 ft Mating cable for the terminal type
	<b>CN-13-C3</b>	Length: 3 m 9.843 ft Mating cable for the terminal type
Sensor mounting bracket	<b>MS-GXL8-3</b>	Mounting bracket for NPN output of GXL-8 type
	<b>MS-GXL12-2</b>	Mounting bracket for GXL-N12 type
	<b>MS-GXL15</b>	Mounting bracket for GXL-15 type
	<b>MS-GXL15-2</b>	Mounting bracket for GXL-15F type


### Connector

- **CN-13**
- **CN-13-C1**
- **CN-13-C3**

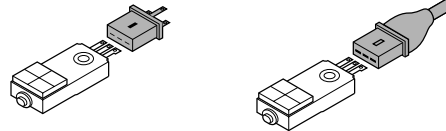


### Sensor mounting bracket

- **MS-GXL8-3**
- **MS-GXL12-2**




Mounting position can be adjusted. It is rust-free, being stainless steel.

A set of one M2.6 (length: 8 mm 0.315 in) pan head screw and two M3 (length: 8 mm 0.315 in) screws with washers are attached.




Screws are not supplied.

- **MS-GXL15**
- **MS-GXL15-2**



Screws are not supplied.



**SPECIFICATIONS**

**DC 2-wire type**

Item	Standard Model No.	GXL-8 type		GXL-15 type				
				Standard		Long sensing range (For mounting on non-magnetic body) (Note 1)		
		Front sensing	Top sensing	Front sensing	Top sensing	Front sensing	Top sensing	
		<b>GXL-8FU</b>	<b>GXL-8HU</b>	<b>GXL-15FU</b>	<b>GXL-15HU</b>	<b>GXL-15FLU</b>	<b>GXL-15HLU</b>	
Max. operation distance (Note 2)		2.5 mm 0.098 in ± 20 %		5 mm 0.197 in ± 10 %		8 mm 0.315 in ± 10 %		
Stable sensing range (Note 2)		0 to 1.8 mm 0 to 0.071 in		0 to 4 mm 0 to 0.157 in		0 to 6.4 mm 0 to 0.252 in		
Standard sensing object		Iron sheet 15 X 15 X t 1 mm 0.591 X 0.591 X t 0.039 in		Iron sheet 20 X 20 X t 1 mm 0.787 X 0.787 X t 0.039 in		Iron sheet 30 X 30 X t 1 mm 1.181 X 1.181 X t 0.039 in		
Hysteresis		20 % or less of operation distance						
Repeatability		Along sensing axis, perpendicular to sensing axis: 0.04 mm 0.002 in or less						
Supply voltage		12 to 24 V DC ± 10 % Ripple P-P 10 % or less						
Current consumption (Note 3)		0.8 mA or less						
Output		Non-contact DC 2-wire type • Load current: 3 to 70 mA (Note 4) • Residual voltage: 3 V or less (Note 5)			Non-contact DC 2-wire type • Load current: 3 to 100 mA (Note 4) • Residual voltage: 3 V or less (Note 5)			
	Utilization category	DC-12 or DC-13						
	Short-circuit protection	Incorporated						
Max. response frequency		1 kHz						
Operation indicator		Normally closed type: Red LED (lights up when the output is ON)						
2-color indicator		Normally open type: Lights up in green under stable sensing condition Lights up in red under unstable sensing condition						
Environmental resistance	Pollution degree	3 (Industrial environment)						
	Protection	IP67 (IEC), IP67 g (JEM)						
	Ambient temperature	- 25 to + 70 °C - 13 to + 158 °F, Storage: - 30 to + 80 °C - 22 to + 176 °F						
	Ambient humidity	45 to 85 % RH, Storage: 35 to 95 % RH						
	EMC	EN 50081-2, EN 50082-2, EN 60947-5-2						
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure						
	Insulation resistance	50 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure						
	Vibration resistance	10 to 55 Hz frequency, 1.5 mm 0.059 in amplitude in X, Y and Z directions for two hours each						
	Shock resistance	1,000 m/s <sup>2</sup> acceleration (100 G approx.) in X, Y and Z directions for three times each						
Sensing range variation	Temperature characteristics	Over ambient temperature range - 25 to + 70 °C - 13 to + 158 °F: Within ± 15/10 % of sensing range at + 20 °C + 68 °F						
	Voltage characteristics	Within ± 2 % for ± 10 % fluctuation of the supply voltage						
Material		Enclosure: PBT, Indicator part: Polyallylate			Enclosure: PET (Glass fiber reinforced) Indicator part: Polyallylate	Enclosure: PBT Indicator part: Polyallylate	Enclosure: PET (Glass fiber reinforced) Indicator part: Polyallylate	
Cable (Note 6)		0.15 mm <sup>2</sup> 2-core oil, heat and cold resistant cable, 1 m 3.281 ft long		0.2 mm <sup>2</sup> 2-core oil, heat and cold resistant cable, 1 m 3.281 ft long				
Cable extension		Extension up to total 50 m 164.042 ft is possible with 0.3 mm <sup>2</sup> , or more, cable.						
Weight		12 g approx.		20 g approx.				
Accessories		<b>MS-GXL8-4</b> (Sensor mounting bracket): 1 set				<b>MS-A15F</b> (Aluminum sheet): 1 pc.	<b>MS-A15H</b> (Aluminum sheet): 1 pc.	

- Notes: 1) To mount the long sensing range **GXL-15** type on a magnetic body, such as iron, the enclosed aluminum sheet, or any other aluminum sheet having a minimum size of 30 X 39.5 X t 0.3 mm 1.181 X 1.555 X t 0.012 in (**GXL-15HLU** type: 30 X 30 X t 0.3 mm 1.181 X 1.181 X t 0.012 in), should be inserted between the sensor and the magnetic body.  
However, it is not necessary to use the aluminum sheet when mounting on a non-magnetic body, such as, aluminum or an insulator.
- 2) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.  
The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.
- 3) It is the leakage current when the output is in the OFF state.
- 4) The maximum load current varies with the ambient temperature. Refer to 'I/O CIRCUIT AND WIRING DIAGRAMS' (p.691~) for more details.
- 5) When the cable is extended, the residual voltage becomes larger according to the resistance of the cable.  
The residual voltage of 5 m 16.404 ft cable length type increases by 0.1 V.
- 6) The flexible cable type (model No. with suffix '-R') has a 0.15 mm<sup>2</sup> (**GXL-15** type: 0.2 mm<sup>2</sup>) flexible, oil, heat and cold resistant cable, 1 m 3.281 ft long.

GXL

GL-6

GL-8/8U

GL-N12

GL-18H/18HL

GX-U/FU

GX-N

GX

Amplifier-separated  
GA-10/GH

Amplifier Built-in

## SPECIFICATIONS

### NPN and PNP output type

Type	NPN output							PNP output				
	GXL-8 type		GXL-N12 type		GXL-15 type			GXL-N12 type		GXL-15 type		
			Cable type	Terminal type	Standard			Long sensing range (For mounting on non-magnetic body) (Note 1)	Cable type	Terminal type	Standard	
Standard Model No.	Front sensing	Top sensing	Front sensing		Front sensing	Top sensing	Top sensing		Front sensing		Front sensing	
Item	GXL-8F	GXL-8H	GXL-N12F	GXL-N12FT	GXL-15F	GXL-15H	GXL-15HL	GXL-N12F-P	GXL-N12FT-P	GXL-15F-P		
Max. operation distance (Note 2)	2.5 mm 0.098 in ± 20 %		3 mm 0.118 in ± 10 %		5 mm 0.197 in ± 10 %			8 mm 0.315 in ± 10 %		3 mm 0.118 in ± 10 %	5 mm 0.197 in ± 10 %	
Stable sensing range (Note 2)	0 to 1.8 mm 0 to 0.071 in		0 to 2 mm 0 to 0.079 in		0 to 4 mm 0 to 0.157 in			0 to 6.4 mm 0 to 0.252 in		0 to 2 mm 0 to 0.079 in	0 to 4 mm 0 to 0.157 in	
Standard sensing object	Iron sheet 15 × 15 × t 1 mm 0.591 × 0.591 × t 0.039 in		Iron sheet 20 × 20 × t 1 mm 0.787 × 0.787 × t 0.039 in			Iron sheet 30 × 30 × t 1 mm 1.181 × 1.181 × t 0.039 in		Iron sheet 20 × 20 × t 1 mm 0.787 × 0.787 × t 0.039 in				
Hysteresis	20 % or less of operation distance											
Repeatability	Along sensing axis, perpendicular to sensing axis: 0.04 mm 0.002 in or less					Along sensing axis, perpendicular to sensing axis: 0.06 mm 0.002 in or less			Along sensing axis, perpendicular to sensing axis: 0.04 mm 0.002 in or less			
Supply voltage	12 to 24 V DC ± 10 % Ripple P-P 10 % or less											
Current consumption	15 mA or less											
Output	NPN open-collector transistor						PNP open-collector transistor					
	<ul style="list-style-type: none"> <li>Maximum sink current: 100 mA</li> <li>Applied voltage: 30 V DC or less (between output and 0 V)</li> <li>Residual voltage: 1 V or less (at 100 mA sink current) 0.4 V or less (at 16 mA sink current)</li> </ul>						<ul style="list-style-type: none"> <li>Maximum source current: 100 mA</li> <li>Applied voltage: 30 V DC or less (between output and + V)</li> <li>Residual voltage: 1 V or less (at 100 mA source current) 0.4 V or less (at 16 mA source current)</li> </ul>					
Utilization category	DC-12 or DC-13											
Short-circuit protection	—											
Max. response frequency	500 Hz				250 Hz			500 Hz		250 Hz		
Operation indicator	Red LED (lights up when the output is ON)											
Environmental resistance	Pollution degree	3 (Industrial environment)										
	Protection	IP67 (IEC), IP67 g (JEM) except for the terminal type										
	Ambient temperature	− 10 to + 55 °C 14 to + 131 °F, Storage: − 30 to + 80 °C − 22 to + 176 °F										
	Ambient humidity	45 to 85 % RH, Storage: 35 to 95 % RH										
	EMC	EN 50081-2, EN 50082-2, EN 60947-5-2										
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure										
	Insulation resistance	50 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure										
	Vibration resistance	10 to 55 Hz frequency, 1.5 mm 0.059 in amplitude in X, Y and Z directions for two hours each										
Shock resistance	1,000 m/s <sup>2</sup> acceleration (100 G approx.) in X, Y and Z directions for three times each											
Sensing range variation	Temperature characteristics	Over ambient temperature range − 10 to + 55 °C + 14 to + 131 °F: Within ± 15 % of sensing range at + 20 °C + 68 °F										
	Voltage characteristics	Within ± 2 % for ± 10 % fluctuation of the supply voltage										
Material	Enclosure: PBT, Indicator part: Polyallylate					Enclosure: PET (Glass fiber reinforced) Indicator part: Polyallylate			Enclosure: PBT Indicator part: Polyallylate			
Cable (Note 3)	0.08 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long		0.15 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long		0.15 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long					0.15 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long		
Cable extension	Extension up to total 100 m 328.084 ft is possible with 0.3 mm <sup>2</sup> , or more, cable.											
Weight	12 g approx.		20 g approx.		5 g approx.			20 g approx.		5 g approx.		
Accessories	MS-GXL8 (Sensor mounting bracket): 1 set		MS-GXL12-1 (Sensor mounting bracket): 1 pc. M3 pan head screw, plain washer, spring washer and nut: 1 set MS-R1 (Rubber washer): 1 pc.						MS-A15H (Aluminum sheet): 1 pc.		MS-GXL12-1 (Sensor mounting bracket): 1 pc. M3 pan head screw, plain washer, spring washer and nut: 1 set MS-R1 (Rubber washer): 1 pc.	


- Notes: 1) To mount the long sensing range GXL-15 type on a magnetic body, such as iron, the enclosed aluminum sheet or any other aluminum sheet having a minimum size of 30 × 30 × t 0.3 mm 1.181 × 1.181 × t 0.012 in, should be inserted between the sensor and the magnetic body. However, it is not necessary to use the aluminum sheet when mounting on a non-magnetic body, such as, aluminum or an insulator.
- 2) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object. The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.
- 3) The flexible cable type (model No. with suffix '-R') has a 0.15 mm<sup>2</sup> (GXL-8 type: 0.1 mm<sup>2</sup>) flexible, oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long.

I/O CIRCUIT AND WIRING DIAGRAMS

DC 2-wire type


GXL-8FU / GXL-8HU type

I/O circuit diagram

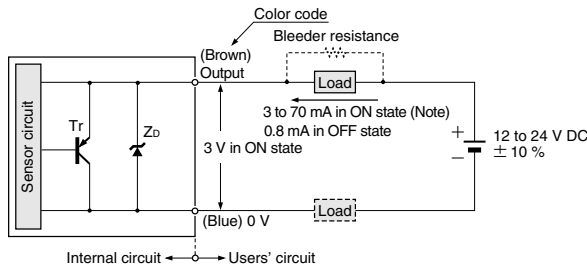


Symbols ... Z<sub>D</sub>: Surge absorption zener diode  
Tr: PNP output transistor

Note: The maximum load current varies depending on the ambient temperature.

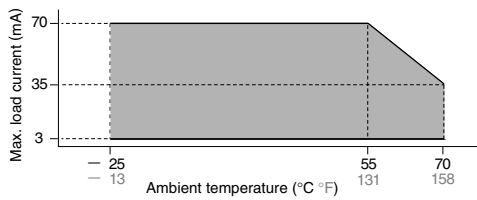

Wiring diagram

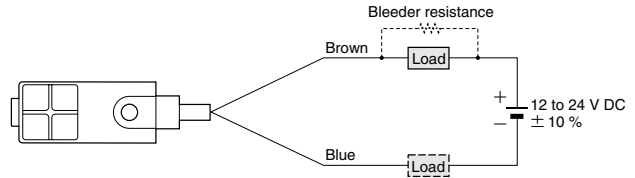


Conditions for the load

- 1) The load should not be actuated by the leakage current (0.8 mA) in the OFF state.
- 2) The load should be actuated by (supply voltage - 3 V) in the ON state.
- 3) The current in the ON state should be between 3 to 70 mA DC. [In case the current is less than 3 mA, connect a bleeder resistance] in parallel to the load so that a current of 3 mA, or more, flows.


GXL-15FU / GXL-15HU / GXL-15FLU / GXL-15HLU type

I/O circuit diagram

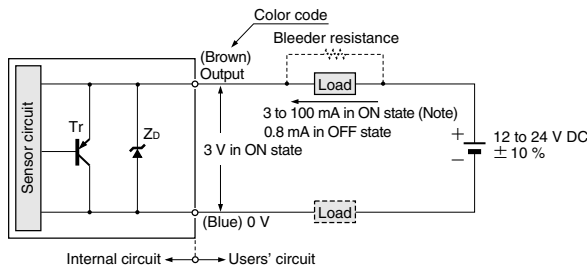


Symbols ... Z<sub>D</sub>: Surge absorption zener diode  
Tr: PNP output transistor

Note: The maximum load current varies depending on the ambient temperature.

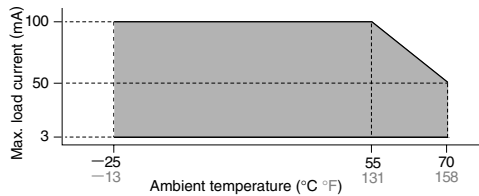

Wiring diagram

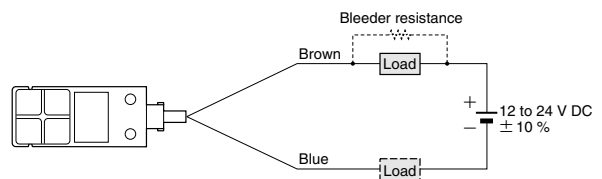

Conditions for the load

- 1) The load should not be actuated by the leakage current (0.8 mA) in the OFF state.
- 2) The load should be actuated by (supply voltage - 3 V) in the ON state.
- 3) The current in the ON state should be between 3 to 100 mA DC. [In case the current is less than 3 mA, connect a bleeder resistance] in parallel to the load so that a current of 3 mA, or more, flows.

GXL

GL-6

GL-8/8U

GL-N12

GL-18H/18HL

GX-U/FU

GX-N

GX


Amplifier-separated  
GA-10/GH




## I/O CIRCUIT AND WIRING DIAGRAMS

### NPN output type

#### I/O circuit diagram

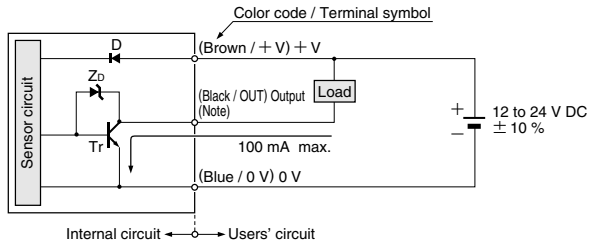

#### Wiring diagram

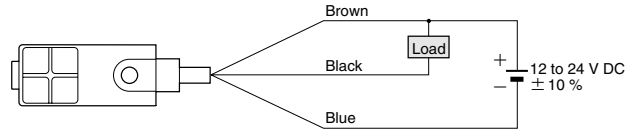


Note: The output does not incorporate a short-circuit protection circuit.  
Do not connect it directly to a power supply or a capacitive load.


Symbols ... D : Reverse supply polarity protection diode  
Zo: Surge absorption zener diode  
Tr: NPN output transistor

### PNP output type

#### I/O circuit diagram

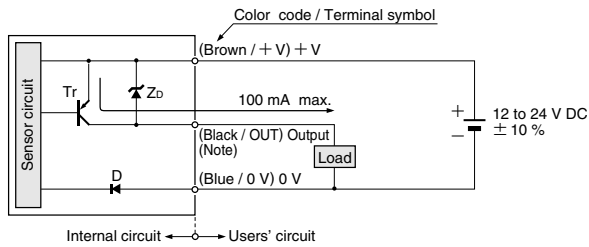

#### Wiring diagram

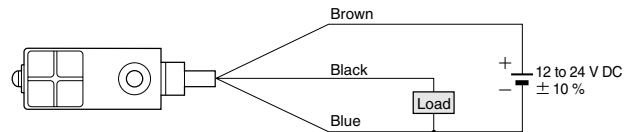


Note: The output does not incorporate a short-circuit protection circuit.  
Do not connect it directly to a power supply or a capacitive load.

Symbols ... D : Reverse supply polarity protection diode  
Zo: Surge absorption zener diode  
Tr: PNP output transistor


SENSING CHARACTERISTICS (TYPICAL)

GXL-8 type

Sensing field (common)

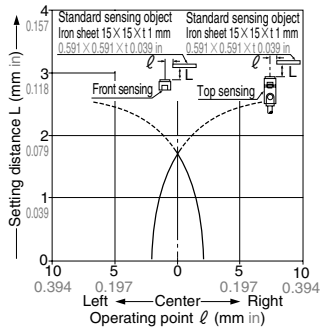


Correlation between sensing object size and sensing range (DC 2-wire type)      Correlation between sensing object size and sensing range (NPN output type)

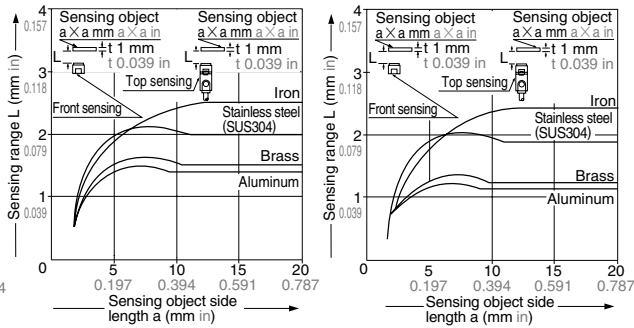


As the sensing object size becomes smaller than the standard size (iron sheet  $15 \times 15 \times 1$  mm  $0.591 \times 0.591 \times 0.039$  in), the sensing range shortens as shown in the left figures.

GXL-N12 type

Sensing field




Correlation between sensing object size and sensing range




As the sensing object size becomes smaller than the standard size (iron sheet  $20 \times 20 \times 1$  mm  $0.787 \times 0.787 \times 0.039$  in), the sensing range shortens as shown in the left figure.

GXL-15 (Standard) type

Sensing field




Correlation between sensing object size and sensing range




As the sensing object size becomes smaller than the standard size (iron sheet  $20 \times 20 \times 1$  mm  $0.787 \times 0.787 \times 0.039$  in), the sensing range shortens as shown in the left figure.

GXL-15 (Long sensing range) type

Sensing field



Correlation between sensing object size and sensing range



As the sensing object size becomes smaller than the standard size (iron sheet  $30 \times 30 \times 1$  mm  $1.181 \times 1.181 \times 0.039$  in), the sensing range shortens as shown in the left figure.

GXL

GL-6

GL-8/8U

GL-N12

Amplifier Built-in

GL-18H/18HL

GX-U/FU

GX-N

GX


Amplifier-separated

GA-10/GH

## PRECAUTIONS FOR PROPER USE

Refer to p.1152~ for general precautions.


### All models

 This product is not a safety sensor. Its use is not intended or designed to protect life and prevent body injury or property damage from dangerous parts of machinery. It is a normal object detection sensor.

### Mounting


#### GXL-8 (DC 2-wire) type

- The tightening torque should be 0.5 N·m or less.
- To mount the sensor with a nut, the thru-hole diameter should be  $\phi 3.4$  mm  $\phi 0.134$  in. With the attached mounting screw and nut, take care that the thickness of the mounting plate should be 2.3 mm 0.091 in or less.
- If a screw other than the attached screw is used, make sure to use a M3 truss head screw. (Do not use a flat head screw) or a pan head screw.

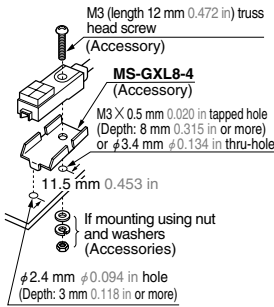


#### GXL-8 (NPN output) type

- The tightening torque should be 0.5 N·m or less.
- To mount the sensor with a nut, the thru-hole diameter should be  $\phi 3$  mm  $\phi 0.118$  in. With the attached mounting screw and nut, take care that the thickness of the mounting plate should be 2.3 mm 0.091 in or less.
- If a screw other than the attached screw is used, make sure to use a M2.6 truss head screw. Note: Do not use a M3 screw.

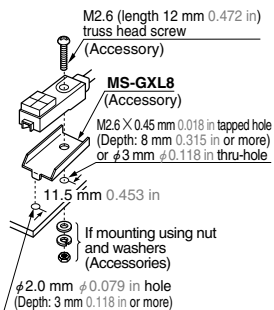


#### GXL-N12 type

##### <One point fixing>

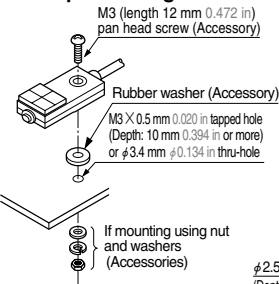



##### <Two point fixing>

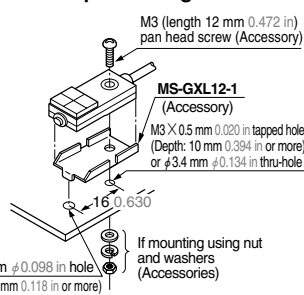

- The tightening torque should be 0.49 N·m or less.
- To mount the sensor with a nut, the thru-hole diameter should be  $\phi 3.4$  mm  $\phi 0.134$  in.

### GXL-15 type


- The tightening torque should be 1 N·m or less.
- To mount the sensor with the optional sensor mounting bracket MS-GXL15, the thru-hole diameter should be  $\phi 3.4$  mm  $\phi 0.134$  in.
- Screw, nut or washers are not supplied. Please arrange them separately.
- To mount the long sensing range GXL-15 type on a magnetic body, such as iron, the enclosed aluminum sheet, or any other aluminum sheet having a minimum size of  $30 \times 39.5 \times t 0.3$  mm  $1.181 \times 1.555 \times t 0.012$  in (GXL-15HLU / GXL-15HL:  $30 \times 30 \times t 0.3$  mm  $1.181 \times 1.181 \times t 0.012$  in), should be inserted between the sensor and the magnetic body. However, it is not necessary to use the aluminum sheet when mounting on a non-magnetic body, such as, aluminum or an insulator.
- When mounting the inductive proximity sensor with the optional sensor mounting bracket MS-GXL15-2, if the bracket is mounted close to the sensing part, the bracket itself gets sensed and the operation becomes unstable. Make sure to mount such that the mounting holes of the sensor and those of the mounting bracket are in one horizontal straight line.

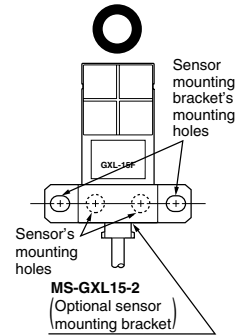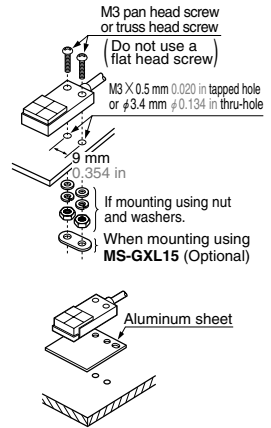

### Influence of surrounding metal

- When there is a metal near the sensor, keep the minimum separation distance specified below.


#### Front sensing type

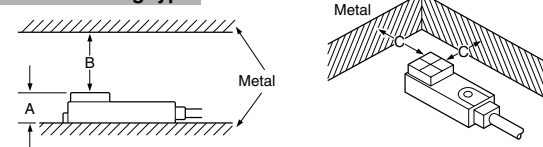

	GXL-8F type	GXL-N12F type	GXL-15FU / GXL-15F type	GXL-15FLU type
A	7 mm 0.276 in	7 mm 0.276 in	8 mm 0.315 in	8 mm 0.315 in (Note)
B	8 mm 0.315 in	20 mm 0.787 in	20 mm 0.787 in	30 mm 1.181 in
C	3 mm 0.118 in	10 mm 0.394 in	7 mm 0.276 in	10 mm 0.394 in

Note: The GXL-15FLU type should be mounted on an insulator or a non-magnetic body. To mount it on a magnetic body, such as iron, use the enclosed aluminum sheet.

#### Top sensing type

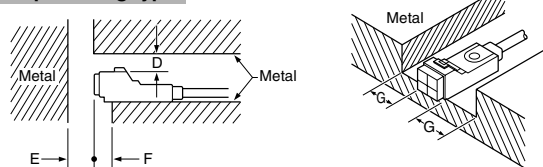

	GXL-8H type	GXL-15HU / GXL-15H type	GXL-15HLU / GXL-15HL type
D	4 mm 0.157 in	6 mm 0.236 in	12 mm 0.472 in
E	10 mm 0.394 in	20 mm 0.787 in	30 mm 1.181 in
F	3 mm 0.118 in	0 mm 0 in	10 mm 0.394 in (Note)
G	3 mm 0.118 in	3 mm 0.118 in	10 mm 0.394 in

Note: When GXL-15HLU / GXL-15HL type is mounted on an insulator or a non-magnetic body, or seated on the enclosed aluminum sheet, the distance 'F' can be zero.

## PRECAUTIONS FOR PROPER USE

Refer to p.1152~ for general precautions.


### All models

#### Mutual interference prevention


- When two or more sensors are installed in parallel or face to face, keep the minimum separation distance specified below to avoid mutual interference.

		H	J
GXL-8 type	Between 'I' type and non 'I' type	0 mm (Note 2)	15 mm 0.591 in
	Between two 'I' types or two non 'I' types	12 mm 0.472 in	30 mm 1.181 in
GXL-N12 type	Between 'I' type and non 'I' type	0 mm (Note 2)	15 mm 0.591 in
	Between two 'I' types or two non 'I' types	20 mm 0.787 in	40 mm 1.575 in
GXL-15F GXL-15FU GXL-15HU type	Between 'I' type and non 'I' type	0 mm (Note 2)	25 mm 0.984 in
	Between two 'I' types or two non 'I' types	30 mm 1.181 in	60 mm 2.362 in
GXL-15H type	Between 'I' type and non 'I' type	0 mm (Note 2)	25 mm 0.984 in
	Between two 'I' types or two non 'I' types	40 mm 1.575 in	60 mm 2.362 in
GXL-15FLU GXL-15HLU type	Between 'I' type and non 'I' type	0 mm (Note 2)	25 mm 0.984 in
	Between two 'I' types or two non 'I' types	75 mm 2.953 in	90 mm 3.543 in
GXL-15HL type	Between 'I' type and non 'I' type	0 mm (Note 2)	25 mm 0.984 in
	Between two 'I' types or two non 'I' types	80 mm 3.150 in	95 mm 3.740 in

#### Front sensing



#### Top sensing



- Notes: 1) 'I' in the model No. specifies the different frequency type.  
 2) Close mounting is possible for up to two sensors.  
 When mounting three sensors or more, at an equal spacing, in a row, the minimum value of dimension H should be as given below.  
**GXL-8 type:** 2 mm 0.079 in, **GXL-N12 type:** 4 mm 0.157 in  
**GXL-15 (Standard) type:** 7.5 mm 0.295 in  
**(GXL-15H type: 12.5 mm 0.492 in)**  
**GXL-15 (Long sensing range) type:** 30 mm 1.181 in  
**(GXL-15HL type: 32.5 mm 1.280 in)**

#### Sensing range

- The sensing range is specified for the standard sensing object. With a non-ferrous metal, the sensing range is obtained by multiplying with the correction coefficient specified below. Further, the sensing range also changes if the sensing object is plated.

#### Correction coefficient

Model No.	GXL-8FU GXL-8HU type		GXL-N12 type	GXL-15FU type	GXL-15HU GXL-15FLU GXL-15HLU type	GXL-15F GXL-15H type	GXL-15HL type
	GXL-8FU type	GXL-8HF type					
Iron	1	1	1	1	1	1	1
Stainless steel (SUS304)	0.82 approx.	0.76 approx.	0.70 approx.	0.74 approx.	0.75 approx.	0.68 approx.	0.76 approx.
Brass	0.59 approx.	0.50 approx.	0.40 approx.	0.53 approx.	0.53 approx.	0.47 approx.	0.50 approx.
Aluminum	0.57 approx.	0.48 approx.	0.35 approx.	0.52 approx.	0.51 approx.	0.45 approx.	0.48 approx.

#### Others


- Do not use during the initial transient time [10 ms (DC 2-wire type: 50 ms)] after the power supply is switched on.
- The output does not incorporate a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load (excluding the DC 2-wire type).

### GXL-N12FT type CN-13

#### Soldering

- To solder the terminals of the sensor and connector **CN-13**, observe the following conditions.


Soldering temperature: 260 °C 500 °F or less  
 Soldering time : 5 sec. or less  
 (CN-13: 10 sec. or less)  
 Soldering position : 1.5 mm 0.059 in, or more, away from the sensor body.



### DC 2-wire type


#### Wiring

- The sensor must be connected to a power supply via a load. If the sensor is connected to a power supply without a load, the short-circuit protection makes the sensor inoperable. (The output stays in the OFF state and the indicator does not light up.) In this case, rectify by connecting the power supply via a load. Now, the sensor becomes operable. Further, take care that if the power supply is connected with reverse polarity without a load, the sensor will get damaged.

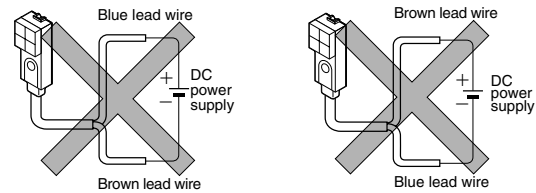


- For series connection (AND circuit) or parallel connection (OR circuit) of sensors, take care of the following.

#### Series connection (AND circuit)




Note: The output is generated normally even if the indicator does not light up properly.

#### Parallel connection (OR circuit)




- The residual voltage of the sensor is 3 V. Before connecting a relay at the load, take care of its actuation voltage. (Some 12 V relays may not be usable.)

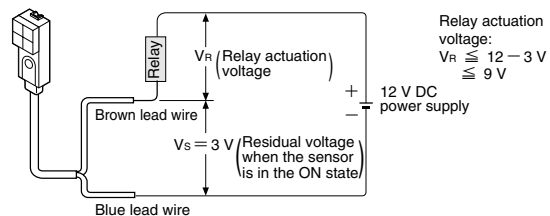

#### 2-color indicator (Normally open type only)


- When the sensing object is in the stable sensing range, the LED lights up in green, and when the sensing object is in the unstable sensing range, the LED lights up in red. While the LED lights up in green, the sensing is performed stably without being affected by temperature drifts or voltage fluctuations.

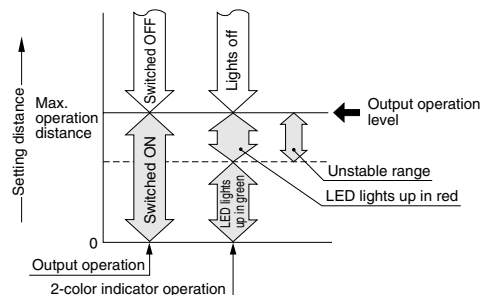


# GXL

**DIMENSIONS (Unit: mm in)** The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.co.jp/>


**GXL-8FU type** Sensor

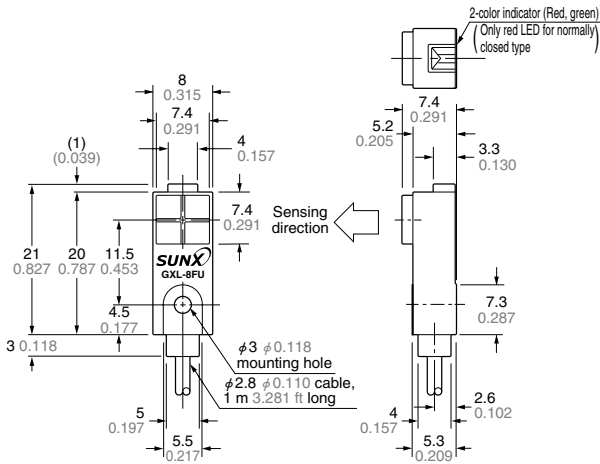


**GXL-8HU type** Sensor

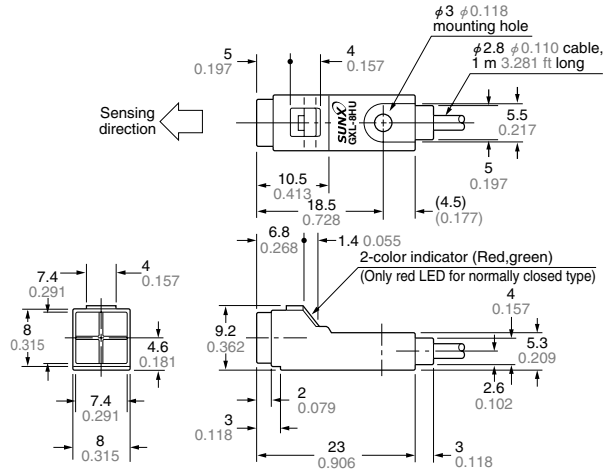


**GXL-8F type** Sensor

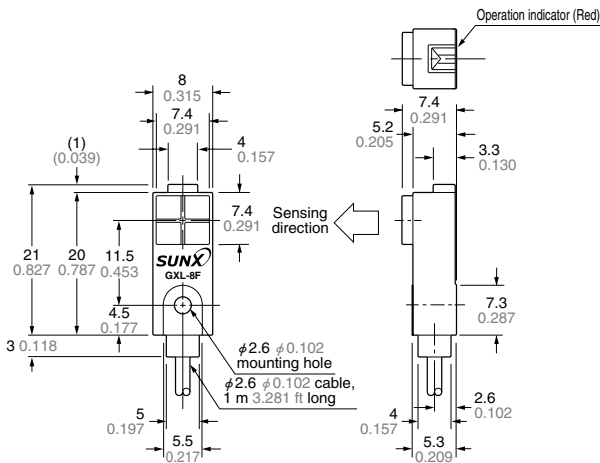


**GXL-8H type** Sensor

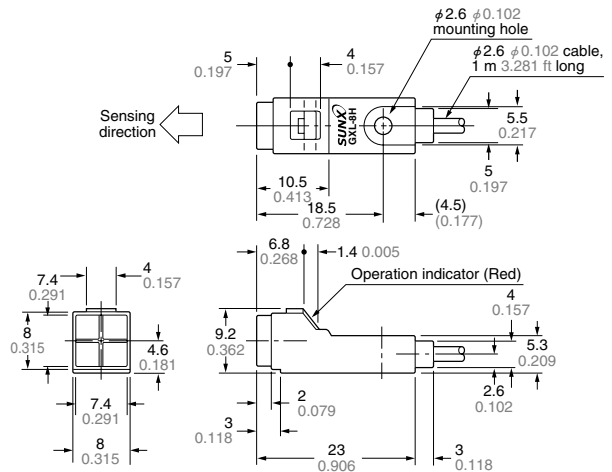

**GXL-N12F type** Sensor

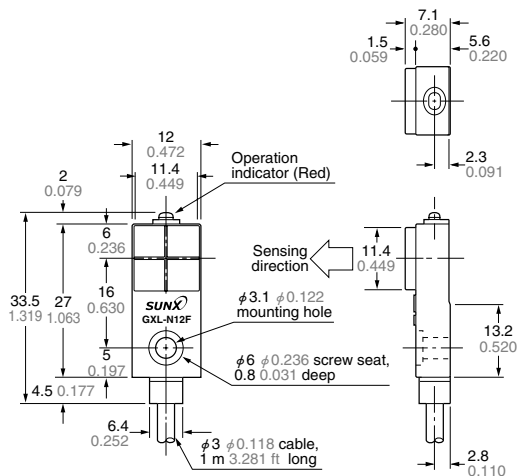


**GXL-N12FT type** Sensor

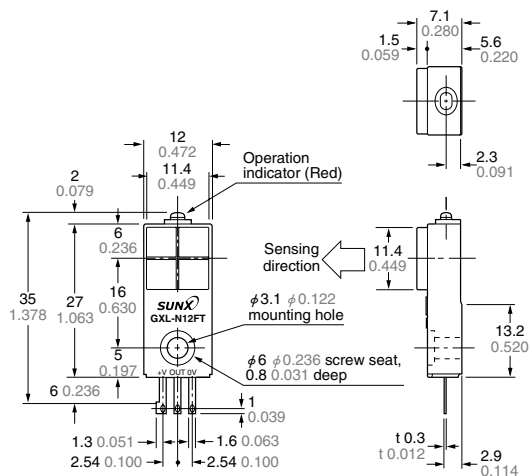


**DIMENSIONS (Unit: mm in)** The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.co.jp/>

### GXL-15F type Sensor

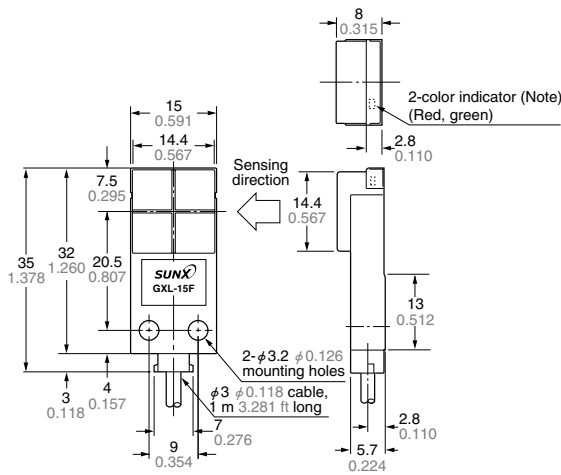

Note: Normally closed DC 2-wire type, NPN output type and PNP output type have an operation indicator (red) instead of the 2-color indicator.


### GXL-15H type Sensor

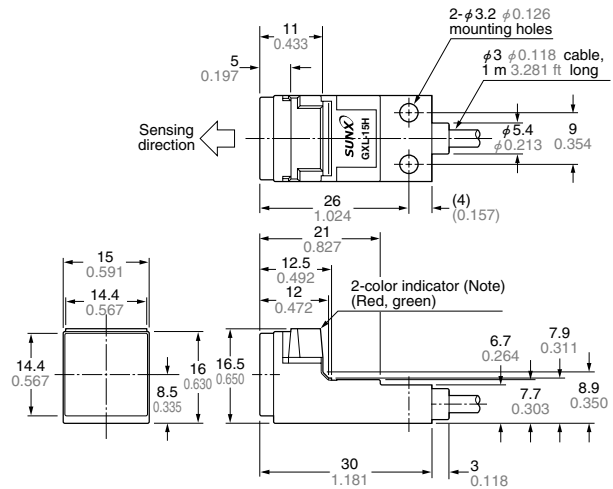

Note: Normally closed DC 2-wire type and NPN output type have an operation indicator (red) instead of the 2-color indicator.

### MS-GXL8-4 Sensor mounting bracket for GXL-8FU / GXL-8HU type (Accessory)

#### Mounting hole dimensions

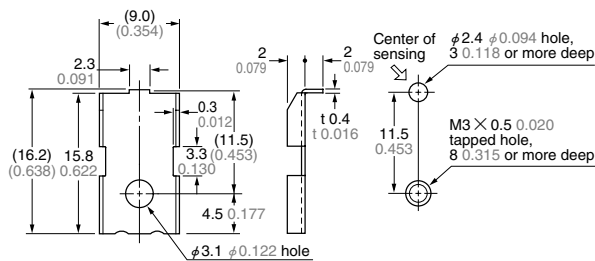


Material: Cold rolled carbon steel (SPCC) (Nickel plated)

1 pc. each of M3 (length 12 mm 0.472 in) truss head screw, nut, spring washer and plain washer is attached.

### MS-GXL8 Sensor mounting bracket for GXL-8F / GXL-8H type (Accessory)

#### Mounting hole dimensions

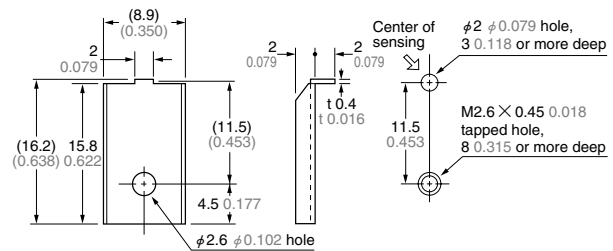


Material: Cold rolled carbon steel (SPCC) (Nickel plated)

1 pc. each of M2.6 (length 12 mm 0.472 in) truss head screw, nut, spring washer and plain washer is attached.

### MS-GXL12-1 Sensor mounting bracket for GXL-N12 type (Accessory)


#### Mounting hole dimensions

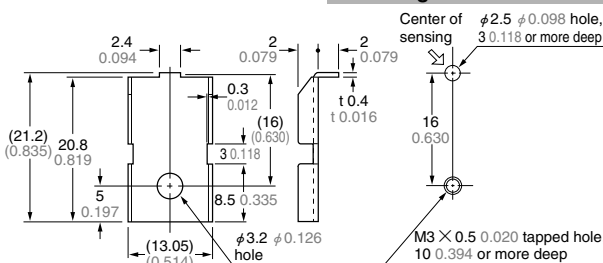

Material: Cold rolled carbon steel (SPCC) (Nickel plated)

1 pc. each of M3 (length 12 mm 0.472 in) pan head screw, plain washer, spring washer and rubber washer (φ9.5 × t 0.5 mm φ0.374 × t 0.020 in) is attached.


### MS-R1 Rubber washer for GXL-N12 type (Accessory)

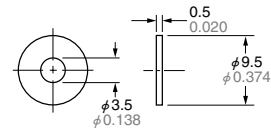

Material: NBR


**DIMENSIONS (Unit: mm in)** The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.co.jp/>

**MS-GXL8-3** Sensor mounting bracket for **GXL-8F / GXL-8H** type (Optional)

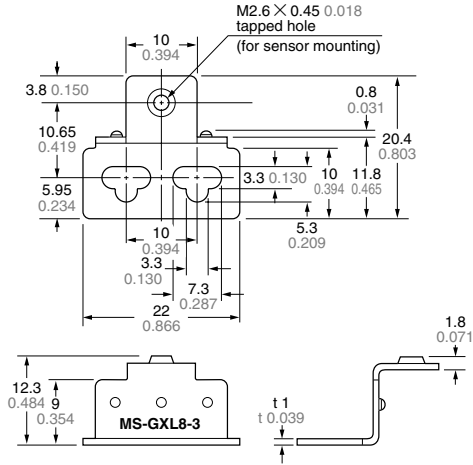


Material: Stainless steel (SUS304)  
One M2.6 (length 8 mm 0.315 in) pan head screw and two M3 (length 8 mm 0.315 in) screws with washers are attached.

**MS-GXL12-2** Sensor mounting bracket for **GXL-N12** type (Optional)

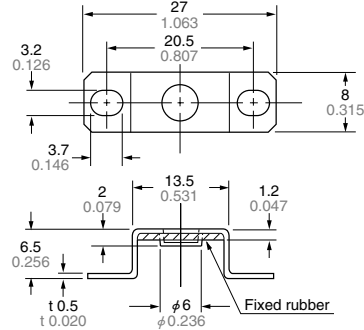


Material: Bracket ... Stainless steel (SUS304)  
Fixed rubber ... FKM (Fluorine rubber)

**MS-GXL15** Sensor mounting bracket for **GXL-15** type (Optional)




Material: Cold rolled carbon steel (SPCC)

**MS-GXL15-2** Sensor mounting bracket for **GXL-15F** type (Optional)

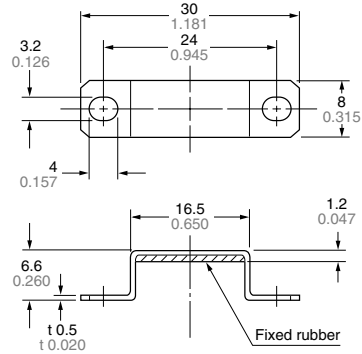

Material: Bracket ... Stainless steel (SUS304)  
Fixed rubber ... FKM (Fluorine rubber)

**CN-13** Connector for terminal type (Optional)

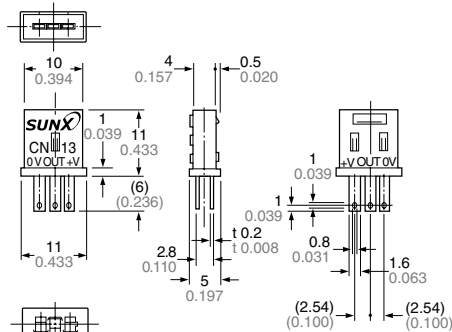

**MS-A15F MS-A15H** Aluminum sheet (Accessory for **GXL-15FLU, GXL-15HLU** and **GXL-15HL** type)

