


**GE1A Series — Single Function ON Delay Timers**



**Key features of the GE1A series include:**

- DPDT or SPDT + instantaneous SPDT
- 8-pin, octal base
- 8 time ranges
- Repeat error  $\pm 0.2\%$  maximum
- Large, clear knob for easy setting
- Instant monitoring of operational status by LED indicators

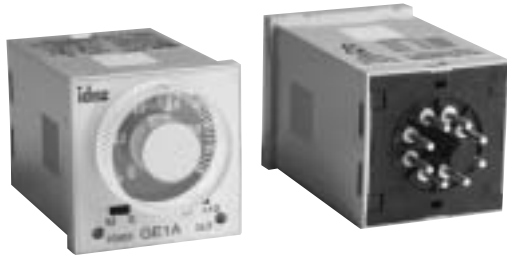

**Timers**

<b>Specifications</b>	<b>Rated Operating Voltage</b>	24V AC/DC 100 to 120V AC 220 to 240V AC									
	<b>Voltage Tolerance</b>	AC: 85 to 110% DC: 90 to 110%									
	<b>Contact Rating</b>	240V AC/5A 24V DC/5A									
	<b>Contact Form</b>	DPDT or SPDT+ instantaneous SPDT									
	<b>Repeat Error</b>	$\pm 0.2\% \pm 10\text{msec}$ maximum									
	<b>Voltage Error</b>	$\pm 0.5\% \pm 10\text{msec}$ maximum									
	<b>Temperature Error</b>	$\pm 3\%$ maximum									
	<b>Setting Error</b>	$\pm 10\%$ maximum									
	<b>Reset Time</b>	0.1 sec maximum									
	<b>Insulation Resistance</b>	100M $\Omega$ minimum (500V DC megger)									
	<b>Dielectric Strength</b>	Between power and output terminals: 1,500V AC, 1 minute Between contact circuits: 750V AC, 1 minute									
	<b>Vibration Resistance</b>	Damage limits: Amplitude 0.75mm, 10 to 55 Hz Operating extremes: Amplitude 0.5mm, 10 to 55 Hz									
	<b>Shock Resistance</b>	Damage limits: 500m/s <sup>2</sup> (Approx. 50G)									
	<b>Power Consumption</b>	<table border="1" style="width: 100%;"> <tr> <td rowspan="4" style="text-align: center;"><b>GE1A-B</b></td> <td>24V AC type: 1.6 VA</td> </tr> <tr> <td>24V DC type: 1.0W</td> </tr> <tr> <td>110V AC type: 3.8 VA</td> </tr> <tr> <td>220V AC type: 7.7 VA</td> </tr> <tr> <td rowspan="4" style="text-align: center;"><b>GE1A-C</b></td> <td>24V AC type: 2.0 VA</td> </tr> <tr> <td>24V DC type: 0.8W</td> </tr> <tr> <td>110V AC type: 3.5 VA</td> </tr> <tr> <td>220V AC type: 8.0 VA</td> </tr> </table>	<b>GE1A-B</b>	24V AC type: 1.6 VA	24V DC type: 1.0W	110V AC type: 3.8 VA	220V AC type: 7.7 VA	<b>GE1A-C</b>	24V AC type: 2.0 VA	24V DC type: 0.8W	110V AC type: 3.5 VA
<b>GE1A-B</b>	24V AC type: 1.6 VA										
	24V DC type: 1.0W										
	110V AC type: 3.8 VA										
	220V AC type: 7.7 VA										
<b>GE1A-C</b>	24V AC type: 2.0 VA										
	24V DC type: 0.8W										
	110V AC type: 3.5 VA										
	220V AC type: 8.0 VA										
<b>Electrical Life</b>	100,000 operations minimum (at full rated load)										
<b>Mechanical Life</b>	10,000,000 operations minimum										
<b>Operating Temperature</b>	-10 to +55°C (without freezing)										
<b>Operating Humidity</b>	35 to 85% RH (without freezing)										

**GE1A Table of Contents**

- Part Number List — G-55
- Timing Diagrams — G-55
- GE1A Accessories — G-56
- GE1A Dimensions — G-57

## Part Numbering List








Mode of Operation	Contact	Output	Rated Voltage	Time Range	Complete Part No.
ON-Delay	Delayed SPDT + Instantaneous SPDT	24V DC/120V AC, 5A	24V AC/DC	0.1s to 10m	GE1A-B10MAD24
			110-120V AC		GE1A-B10MA110
			220-240V AC		GE1A-B10MA220
			24V AC/DC	0.1m to 10h	GE1A-B10HAD24
			110-120V AC		GE1A-B10HA110
			220-240V AC		GE1A-B10HA220
	Delayed DPDT	240V AC, 5A	24V AC/DC	0.1s to 10m	GE1A-C10MAD24
			110-120V AC		GE1A-C10MA110
			220-240V AC		GE1A-C10MA220
			24V AC/DC	0.1m to 10h	GE1A-C10HAD24
			110-120V AC		GE1A-C10HA110
			220-240V AC		GE1A-C10HA220

## Timing Diagrams/Schematics


	GE1A-B Delayed SPDT + Instantaneous SPDT	GE1A-C Delayed DPDT																																					
Operation Mode Selection																																							
ON-Delay 1 MODE A	<table border="1"> <thead> <tr> <th>Item</th> <th>Terminal No.</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td>Power (Power)</td> <td>2-7 (8p)</td> <td> </td> </tr> <tr> <td rowspan="2">Delayed Contact</td> <td>(NC) 5-8 (8p)</td> <td> </td> </tr> <tr> <td>(NO) 6-8 (8p)</td> <td> </td> </tr> <tr> <td rowspan="2">Instantaneous Contact</td> <td>(NC) 1-4</td> <td> </td> </tr> <tr> <td>(NO) 1-3</td> <td> </td> </tr> <tr> <td rowspan="2">Indicator</td> <td>POWER</td> <td> </td> </tr> <tr> <td>OUT</td> <td> </td> </tr> </tbody> </table>	Item	Terminal No.	Operation	Power (Power)	2-7 (8p)		Delayed Contact	(NC) 5-8 (8p)		(NO) 6-8 (8p)		Instantaneous Contact	(NC) 1-4		(NO) 1-3		Indicator	POWER		OUT		<table border="1"> <thead> <tr> <th>Item</th> <th>Terminal No.</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td>Power (Power)</td> <td>2-7 (8p)</td> <td> </td> </tr> <tr> <td rowspan="2">Delayed Contact</td> <td>(NC) 1-4, 5-8 (8p)</td> <td> </td> </tr> <tr> <td>(NO) 1-3, 6-8 (8p)</td> <td> </td> </tr> <tr> <td rowspan="2">Indicator</td> <td>POWER</td> <td> </td> </tr> <tr> <td>OUT</td> <td> </td> </tr> </tbody> </table>	Item	Terminal No.	Operation	Power (Power)	2-7 (8p)		Delayed Contact	(NC) 1-4, 5-8 (8p)		(NO) 1-3, 6-8 (8p)		Indicator	POWER		OUT	
Item	Terminal No.	Operation																																					
Power (Power)	2-7 (8p)																																						
Delayed Contact	(NC) 5-8 (8p)																																						
	(NO) 6-8 (8p)																																						
Instantaneous Contact	(NC) 1-4																																						
	(NO) 1-3																																						
Indicator	POWER																																						
	OUT																																						
Item	Terminal No.	Operation																																					
Power (Power)	2-7 (8p)																																						
Delayed Contact	(NC) 1-4, 5-8 (8p)																																						
	(NO) 1-3, 6-8 (8p)																																						
Indicator	POWER																																						
	OUT																																						

**Accessories**

**Mounting Accessories**

	<b>Style</b>	<b>Appearance</b>	<b>Part No.</b>
<b>DIN Rail/ Surface Mounting Accessories</b>	8-Pin Screw Terminal (dual tier)		SR2P-05
	8-Pin Fingersafe Socket		SR2P-05C
	8-Pin Screw Terminal		SR2P-06
	DIN Mounting Rail Length 1000mm		BNDN1000
<b>Panel Mounting Accessories</b>	8-Pin Solder Terminal		SR2P-51
	Screw Terminal Socket		SR6P-M08G
	Panel Mount Adapter		GE9Z-AD


**Other Accessories**

	<b>Style</b>	<b>Appearance</b>	<b>Part No.</b>
	Dust Cover		GE9Z-C48


**Timers**

**Dimensions: GE1A Series**

**GE1A Timer**

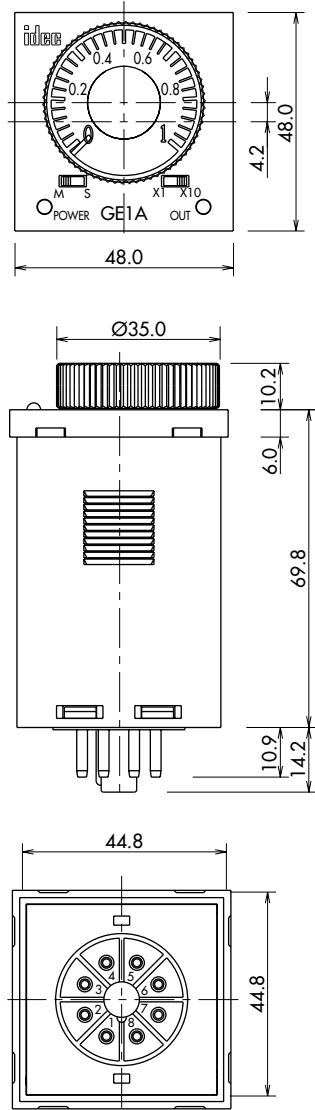


**8-Pin SR2P-05**

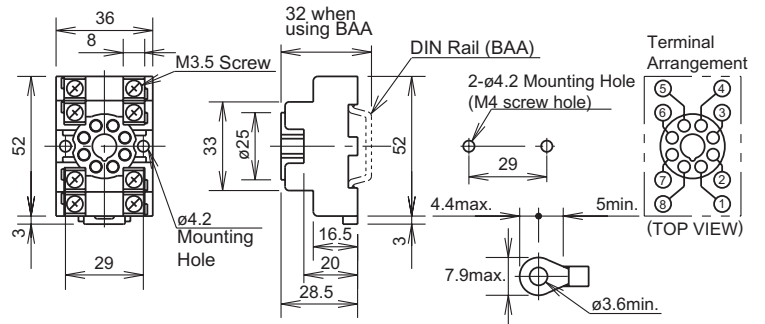


**8-Pin SR2P-06**

Dimensions in inches (mm)

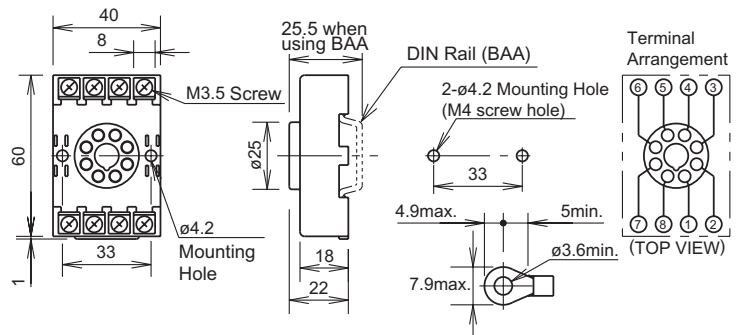

**GE1A Timer Panel Cutout**

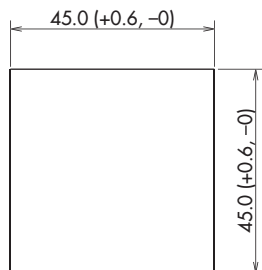

## General Instructions for All Timer Series

### Load Current

With inductive, capacitive, and incandescent lamp loads, inrush current more than 10 times the rated current may cause welded contacts and other undesired effects. The inrush current and steady-state current must be taken into consideration when specifying a timer.

### Contact Protection

Switching an inductive load generates a counter-electromotive force (back EMF) in the coil. The back EMF will cause arcing, which may shorten the contact life and cause imperfect contact. Application of a protection circuit is recommended to safeguard the contacts.

### Temperature and Humidity

Use the timer within the operating temperature and operating humidity ranges and prevent freezing or condensation. After the timer has been stored below its operating temperature, leave the timer at room temperature for a sufficient period of time to allow it to return to operating temperatures before use.

### Environment

Avoid contact between the timer and sulfurous or ammonia gases, organic solvents (alcohol, benzene, thinner, etc.), strong alkaline substances, or strong acids. Do not use the timer in an environment where such substances are prevalent. Do not allow water to run or splash on the timer.

### Vibration and Shock

Excessive vibration or shocks can cause the output contacts to bounce, the timer should be used only within the operating extremes for vibration and shock resistance. In applications with significant vibration or shock, use of hold down springs or clips is recommended to secure a timer to its socket.

### Time Setting

The time range is calibrated at its maximum time scale; so it is desirable to use the timer at a setting as close to its maximum time scale as possible. For a more accurate time delay, adjust the control knob by measuring the operating time with a watch before application.

### Input Contacts

Use mechanical contact switch or relay to supply power to the timer. When driving the timer with a solid-state output device (such as a two-wire proximity switch, photoelectric switch, or solid-state relay), malfunction may be caused by leakage current from the solid-state device. Since AC types comprise a capacitive load, the SSR dielectric strength should be two or more times the power voltage when switching the timer power using an SSR.

Generally, it is desirable to use mechanical contacts whenever possible to apply power to a timer or its signal inputs. When using solid state devices, be cautious of inrushes and back-EMF that may exceed the ratings on such devices. Some timers are specially designed so that signal inputs switch at a lower voltage than is used to power the timer (models designated as "B" type).

## Timing Accuracy Formulas

Timing accuracies are calculated from the following formulas:

$$\text{Repeat Error} = \pm \frac{1}{2} \times \frac{\text{Maximum Measured Value} - \text{Minimum Measured Value}}{\text{Maximum Scale Value}} \times 100\%$$

$$\text{Voltage Error} = \pm \frac{T_v - T_r}{T_r} \times 100\%$$

$T_v$ : Average of measured values at voltage V  
 $T_r$ : Average of measured values at the rated voltage

$$\text{Temperature Error} = \pm \frac{T_t - T_{20}}{T_{20}} \times 100\%$$

$T_t$ : Average of measured values at °C  
 $T_{20}$ : Average of measured values at 20°C

$$\text{Setting Error} = \pm \frac{\text{Average of Measured Values} - \text{Set Value}}{\text{Maximum Scale Value}} \times 100\%$$