

High Performance DC Power Supplies...

speed and accuracy
for test optimization

Agilent Performance DC Power Supplies provide the features and performance necessary to satisfy the most demanding requirements. For system designers who are striving to shorten test time and maximize production throughput, the Agilent High Performance DC power supplies will help them achieve their goals.

Multiple output power supplies reduce rack space. The advanced programmable capabilities allow for efficient system design and maintenance. Also their programming and measurement accuracy, and their DUT protection features, make them an excellent value for the R&D lab.

Comparison Summary	Agilent Basic DC Power Supplies	Agilent High Performance DC Power Supplies
Output Power	30 W-1500 W	40 W-6600 W
Number of outputs	1-3	1-8
GPIB programming and measurement speed	Moderate	Fast
Output rise/fall time	Moderate	Fast
Convenient 1/2 rack-size for bench-top use	Yes	No
Active Downprogrammer for enhanced test throughput	No	Yes
Stored wake-up state	No	Yes
Programmable Capabilities	Moderate	Extensive
Protection for the DUT	Moderate	Extensive

More detailed specifications at www.agilent.com/find/power



6611C - 6614C

Single-Output 40-50 W GPIB

- Small, compact size for bench and system use
- Fast, low-noise outputs
- Dual-range, precision low current measurement
- Built-in measurements and advanced programmable features
- Protection features to ensure DUT safety

This series of linear-regulated 40-50 W DC power supplies is designed to maximize the throughput of DUTs through the manufacturing test process with fast programming and measurement, and also active downprogramming. It offers many advanced programmable features including stored states and status reporting. Programming is done using industry standard SCPI commands via the GPIB or RS-232. Test system integration is further simplified by using the VXIPlug&Play drivers. The optional relays simplify system design and troubleshooting.

The half-rack size of the 6610A series makes it a convenient DC power supply for the R&D lab bench. The built-in microamp measurement system helps the engineer to easily and accurately monitor the output voltage and current without a complicated test setup.

Application Notes:

10 Practical Tips You Need to Know About Your Power Products
5965-8239E

10 Hints for Using Your Power Supply to Decrease Test Time
5968-6359E

Understanding Linear Power Supply Operation (AN1554)
5989-2291EN

Specifications

(at 0° to 55°C unless otherwise specified)

	6611C	6612C	6613C	6614C	6611C-J05 Special Order Option
Number of outputs	1	1	1	1	1
GPIB	Yes	Yes	Yes	Yes	Yes
Output Ratings					
Voltage	0 to 8 V	0 to 20 V	0 to 50 V	0 to 100 V	0 to 10 V
Current	0 to 5 A	0 to 2 A	0 to 1 A	0 to 0.5 A	0 to 5 A
Programming accuracy (at 25°C ±5°C)					
Voltage	5 mV	10 mV	20 mV	50 mV	5 mV
+Current	0.05% +	2 mA	1 mA	0.75 mA	0.5 mA
Ripple and noise 20 Hz to 20 MHz, with outputs ungrounded or with either terminal grounded					
Voltage	rms 0.5 mV peak-to-peak 3 mV	0.5 mV 3 mV	0.5 mV 4 mV	0.5 mV 5 mV	0.5 mV 3 mV
Normal mode	rms 2 mA	1 mA	1 mA	1 mA	2 mA
DC measurement accuracy via GPIB or front-panel meters with respect to actual output at 25°C ±5°C					
Voltage	0.03% +	2 mV	3 mV	6 mV	12 mV
Low current range -20 mA to +20 mA	0.1% +	2.5 µA	2.5 µA	2.5 µA	2.5 µA
High current range +20 mA to +rated 1	0.2% +	0.5 mA	0.25 mA	0.2 mA	0.1 mA
-20 mA to -rated 1	0.2% +	1.1 mA	0.85 mA	0.8 mA	0.7 mA
Load regulation					
Voltage	2 mV	2 mV	4 mV	5 mV	2 mV
Current	1 mA	0.5 mA	0.5 mA	0.5 mA	1 mA
Line regulation					
Voltage	0.5 mV	0.5 mV	1 mV	1 mV	0.5 mV
Current	0.5 mA	0.5 mA	0.25 mA	0.25 mA	0.5 mA
Transient response time Less than 100 µs for the output to recover to its previous level (within 0.1% of the voltage rating of the supply or 20 mV, whichever is greater) following any step change in load current of up to 50% of the output current rating of the supply					
Supplemental Characteristics (Non-warranted characteristics determined by design and useful in applying the product)					
Average programming resolution					
Voltage	2 mV	5 mV	12.5 mV	25 mV	3 mV
Current	1.25 mA	0.5 mA	0.25 mA	0.125 mA	1.25 mA
Sink current	3 A	1.2 A	0.6 A	0.3 A	3 A

More detailed specifications at www.agilent.com/find/6610

Single-Output: 40-50 W GPIB (Continued)

Supplemental Characteristics for all model numbers

DC Floating Voltage: Output terminals can be floated up to ± 240 Vdc maximum from chassis ground

Remote Sensing: Up to two volts dropped in each load lead. Add 2 mV to the voltage load regulation specification for each one volt change in the positive output lead due to load current change.

Command Processing Time: Average time required for the output voltage to begin to change following receipt of digital data is 4 ms for the power supplies connected directly to the GPIB.

Output Programming Response Time: The rise and fall time (10/90% and 90/10%) of the output voltage is less than 2 ms. The output voltage change settles within 1 LSB (0.025% x rated voltage) of final value in less than 6 ms.

GPIB Interface Capabilities: IEEE-488.2, SCPI command set, and 6630A Series programming compatibility

Input Power: (full load): 1.6 A, 100 W (6611C: 2.2 A, 120 W)

Regulatory Compliance: Complies with EMC directive 89/336/EEC (ISM 1B).

Software Driver:
VXIPlug&Play

Warranty Period: One year

Size: 212.8 mm W x 88.1 mm H x 368.3 mm D (8.4 in x 3.5 in x 14.5 in)

Weight: 8.2 kg (18.16 lb) net;
10.6 kg (23.5 lb) shipping

Ordering Information

Opt 100 87 to 106 Vac, 47 to 63 Hz

Opt 120 104 to 127 Vac, 47 to 63 Hz

Opt 220 191 to 233 Vac, 47 to 63 Hz

Opt 230 207 to 253 Vac, 47 to 63 Hz

Opt 760 Isolation and Reversal relays

* **Opt ICM** Rack-mount Kit (p/n 5063-9240)

* **Opt AXS** Rack-mount Kit side-by-side mounting of two units, Lock-link Kit p/n 5061-9694; Flange Kit p/n 5062-3974

Opt 0L1 Full documentation on CD-ROM, and printed standard documentation package

Opt 0L2 Extra copy of standard printed documentation package

Opt 0B0 Full documentation on CD-ROM only

Opt 0B3 Service Manual

*Support rails required


Accessories

Rack-mount and slide for two side-by-side units of different lengths p/n 1494-0015, 5063-9255 and filler panel 5002-3999

Rack-mount slide and support for one instrument p/n 1494-0015, 5063-9255 and filler panel 5002-3999

E3663AC Support rails for Agilent rack cabinets

Agilent Models: 6611C, 6612C, 6613C, 6614C

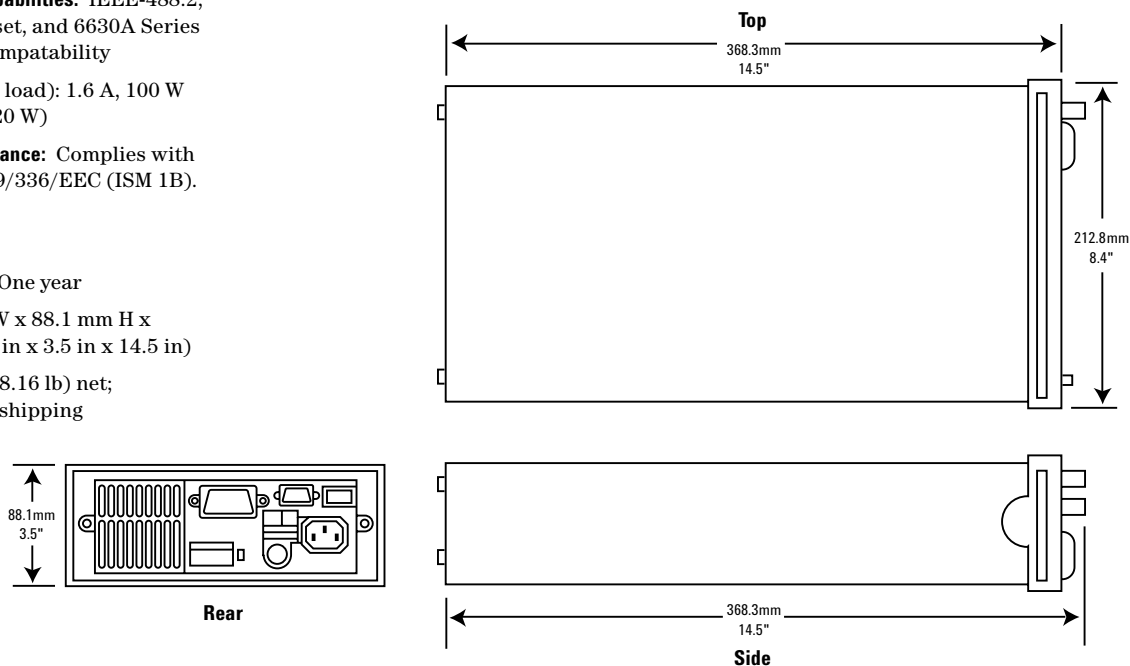

More detailed specifications at www.agilent.com/find/6610

**Your Requested Excerpt from the
Agilent System and Bench Instruments Catalog 2006**

The preceding page(s) are an excerpt from the 2006 System and Bench Instruments Catalog. We hope that these pages supply the information that you currently need. If you would like to have further information about the extensive selection of Agilent DC power supplies, please visit www.agilent.com/find/power to print a copy of the complete catalog, or to request that a copy be sent to you. You will also find a lot of other useful information on this Web site.

In the full System and Bench Instruments Catalog, you will find that Agilent offers much more than DC power supplies. This catalog contains detailed technical and application information on digital multimeters, DC power supplies, arbitrary waveform generators, and many more instruments. If you need basic, clean, power for your lab bench, it's there. In each power product category we have also integrated the capabilities you need for a complete power solution, including extensive measurement and analysis capabilities.

Please give us a call at your local Agilent Technologies sales office, or call a regional office listed, for assistance in choosing or using Agilent power products.

Keep up to date with Agilent's Test and Measurement Email Updates

As an Email Update subscriber, you will receive periodic customized email updates that match the areas of interest that you have specified. Your update will include products and services, applications and support information, events and promotions. Sign up today at www.agilent.com/find/emailupdates. Check off DC power supplies, AC power sources or electronic loads on your registration form, and we will promptly let you know what's new in power products. Our Privacy Statement at www.agilent.com/go/privacy describes our commitment to you regarding your privacy.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444

(fax) 800 829 4433

Canada:

(tel) 877 894 4414

(fax) 800 746 4866

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800

(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: tm_ap@agilent.com

Contacts revised: 09/26/05

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006
Printed in the USA, February 8, 2006



Agilent Technologies