

CM3500 Series

Single Phase Bridge Rectifiers


multicomp



Features:

- Electrically isolated metal case for maximum heat dissipation.
- Surge overload ratings to 400 amperes.

CM Series

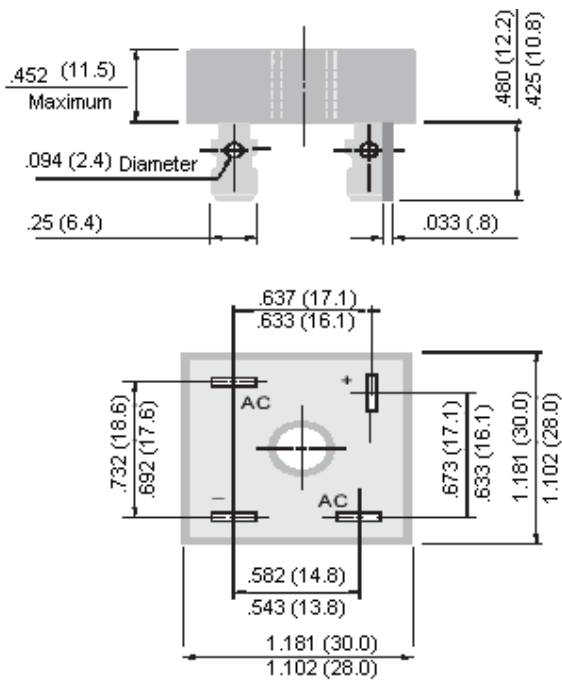

Dimensions : Inches (Millimetres)

Mechanical Data :

Case : Metal, electrically isolated.
Terminals : Plated 25" Faston.
Mounting position : Any.

multicomp

Maximum Ratings and Electrical Characteristics:

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	CM3501	CM3502	CM3504	CM3506	CM3508	CM35010	Unit
Maximum recurrent peak reverse voltage	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	70	140	280	420	560	700	
Maximum DC blocking voltage	100	200	400	600	800	1000	
Maximum average forward current $T_A = 55^\circ\text{C}$	35.0						A
Non-repetitive peak forward surge current, rated load	400						
Maximum forward voltage per bridge element specified current at 17.5A	1.2						V
Maximum reverse current at rated DC blocking voltage per element	10.0						μA
I ² t rating for fusing (t < 8.35ms)	664						A ² S
Typical thermal resistance (Figure 3) R θ JC	2.5						$^\circ\text{C}/\text{W}$
Operating temperature range T_J	-55 to +150						$^\circ\text{C}$
Storage temperature range T_A							

NOTE: *Unit mounted on metal heat-sink.

Rating and Characteristic Curves

Figure 1 Output Current VS. Case Temperature Resistive Or Inductive Load $T_J = 150^\circ\text{C}$


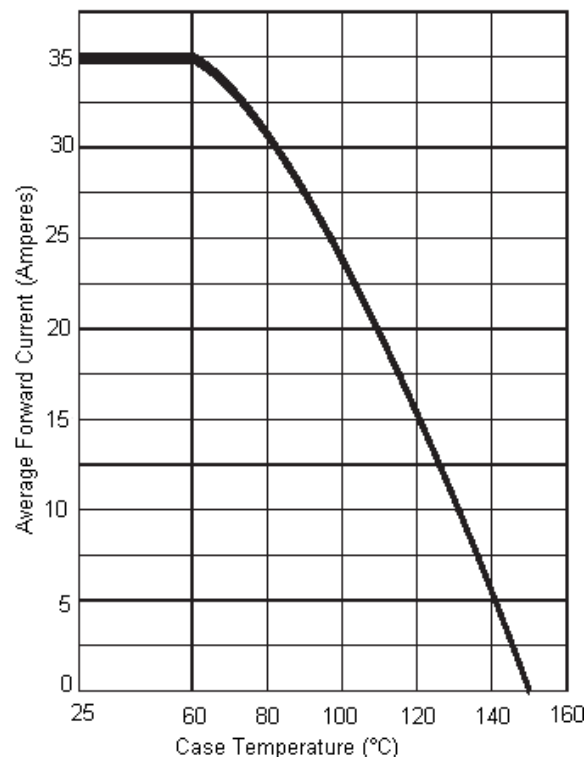


Figure 2 Typical Instantaneous Forward Characteristics at $T_J = 25^\circ\text{C}$

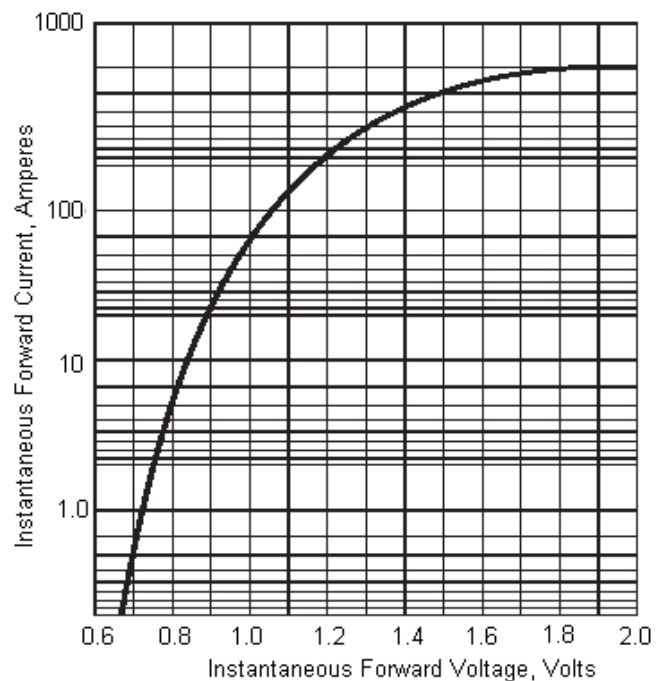

CM3500 Series

Single Phase Bridge Rectifiers



Figure 3 Output Current VS. Ambient Temperature Resistive or Inductive Load Bridge Mounted on 8" x 8" Aluminium Plate 25" Thick


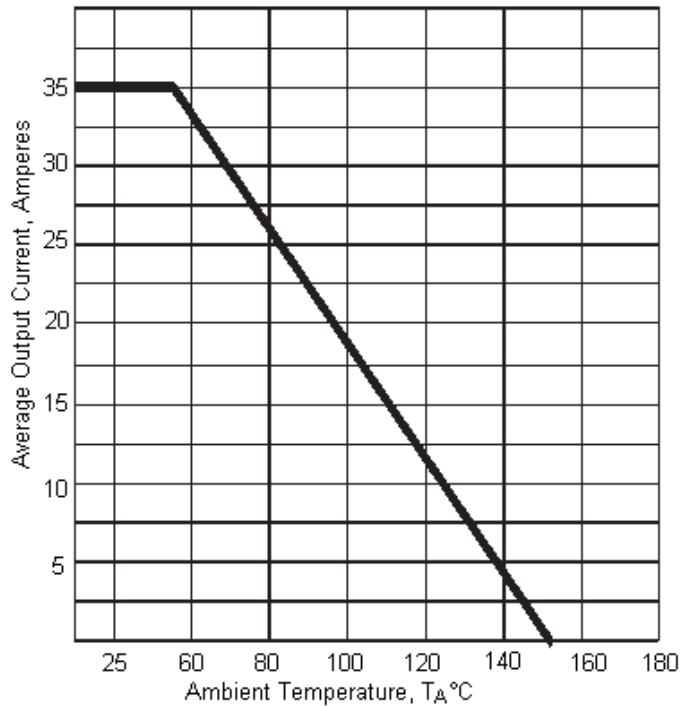


Figure 4 Power Dissipation VS. Average Output Current Resistive or Inductive Load T_J = 150°C



Specifications

Current Rating (A)	VRRM (V)	Maximum AC Input Voltage (V)	Part Number
35	100	70	CM3501
	200	140	CM3502
	400	280	CM3504
	600	420	CM3506
	800	500	CM3508
	1000	800	CM35010

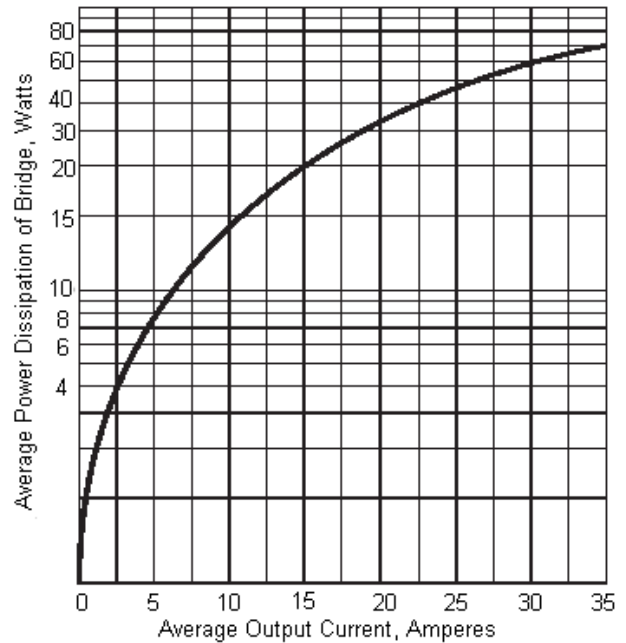

CM3500 Series

Single Phase Bridge Rectifiers



Notes:

International Sales Offices:

	AUSTRALIA – Farnell InOne Tel No: ++ 61 2 9645 8888 Fax No: ++ 61 2 9644 7898		FINLAND – Farnell InOne Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411		NETHERLANDS – Farnell InOne Tel No: ++ 31 30 241 7373 Fax No: ++ 31 30 241 7333		SWITZERLAND – Farnell InOne Tel No: ++ 41 1 204 64 64 Fax No: ++ 41 1 204 64 54
	AUSTRIA – Farnell InOne Tel No: ++ 43 662 2180 680 Fax No: ++ 43 662 2180 670		FRANCE – Farnell InOne Tel No: ++ 33 474 68 99 99 Fax No: ++ 33 474 68 99 90		NEW ZEALAND – Farnell InOne Tel No: ++ 64 9 357 0646 Fax No: ++ 64 9 357 0656		UK – Farnell InOne Tel No: ++ 44 8701 200 200 Fax No: ++ 44 8701 200 201
	BELGIUM – Farnell InOne Tel No: ++ 32 3 475 2810 Fax No: ++ 32 3 227 3648		GERMANY – Farnell InOne Tel No: ++ 49 89 61 39 39 39 Fax No: ++ 49 89 613 59 01		NORWAY – Farnell InOne Tel No: ++ 45 44 53 66 66 Fax No: ++ 45 44 53 66 02		UK – BuckHickman InOne ++ 44 8450 510 150 ++ 44 8450 510 130
	BRAZIL – Farnell-Newark InOne Tel No: ++ 55 11 4066 9400 Fax No: ++ 55 11 4066 9410		HONG KONG – Farnell-Newark InOne Tel No: ++ 852 2268 9888 Fax No: ++ 852 2268 9899		PORTUGAL – Farnell InOne Tel No: ++ 34 93 475 8804 Fax No: ++ 34 93 474 5288		UK – CPC ++ 44 8701 202 530 ++ 44 8701 202 531
	CHINA – Farnell-Newark InOne Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022		IRELAND – Farnell InOne Tel No: ++ 353 1 830 9277 Fax No: ++ 353 1 830 9016		SINGAPORE – Farnell-Newark InOne Tel No: ++ 65 6788 0200 Fax No: ++ 65 6788 0300	 EXPORT – Farnell InOne Tel No: ++ 44 8701 200 208 Fax No: ++ 44 8701 200 209 For enquiries from all other markets	
	DENMARK – Farnell InOne Tel No: ++ 45 44 53 66 44 Fax No: ++ 45 44 53 66 06		ITALY – Farnell InOne Tel No: ++ 39 02 93 995 200 Fax No: ++ 39 02 93 995 300		SPAIN – Farnell InOne Tel No: ++ 34 93 475 8805 Fax No: ++ 34 93 474 5107		
	ESTONIA – Farnell InOne Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411		MALAYSIA – Farnell-Newark InOne Tel No: ++ 60 3 7873 8000 Fax No: ++ 60 3 7873 7000		SWEDEN – Farnell InOne Tel No: ++ 46 8 730 50 00 Fax No: ++ 46 8 83 52 62		

<http://www.farnellinone.com>
<http://www.buckhickmaninone.com>
<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

