Embedded Power for Business-Critical Continuity

### **BXB75 Series** Single output

Total Power:50 - 75WInput Voltage:36 - 75VDC# of Outputs:Single

### **Special Features**

- Industry standard footprint MTBF >1.4 million hours (Bellcore 332)
- Input voltage to ETS300<u>-132-2</u>
- Adjustable output voltage
- No minimum load required
- Separate case ground pin
- 2:1 input range for battery powered applications
- Undervoltage lockout (UVLO)
- UL, VDE and CSA safety approvals
- Available RoHS compliant
- 2 year warranty

## Safety

VDE0805/EN60950/IEC950 File No. 10401-3336-0205

UL1950 File No. E136005

CSA C22.2 No. 950 File No. LR41062C



The BXB75 Series are high power density dc-dc converters packaged in the industry standard footprint (2.40 x 2.28 x 0.50 inches) to give designers optimum choices when specifying for both new and replacement designs. Suitable for a wide range of applications in nearly any industry, the BXB75 was particularly designed with communication and distributed power applications in mind. Using Bellcore 332, the MTBF is greater than 1,400,000 hours. Aluminum baseplate technology with four threaded M3 inserts makes heatsink attachment and optimum thermal management easy. The BXB75 series is approved to IEC950 by UL, CSA and VDE.





# **Specifications**

Rev.03.08.07 bxb75s 2 of 4

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

OUTPUT SPECIFICATIONS		
Voltage adjustability		60% to 110%
Set point accuracy		±1.0%
Line regulation	Low line to hig	h line ±0.05%
Load regulation	Full load to mi	n. load ±0.10%
Minimum load		0%
Overshoot	At turn-on and	l turn-off None
Undershoot		None
Ripple and noise (5 Hz to 20 MHz) (See Note 1)	3.3 V and 5 V 12 V	75 mV pk-pk, 20 mV rms 100 mV pk-pk, 30 mV rms
Temperature coefficient		±0.01%/°C
Transient response (See Note 2)		±2.0% max. deviation 170 μs recovery to within ±1.0%
Remote sense		0.5 Vdc transmission line drop compensation
INPUT SPECIFICATIONS		
Input voltage range	48 Vin nomina	l 36-75 Vdc
Input current	No load Remote OFF	100 mA max. 20 mA max.
Input current (max.) (See Note 4)		3.5 A max. @ Io max. and Vin = 0-75 V
Input reflected ripple	(See Note 6)	5 mA pk-pk
Active low remote ON/OFF Logic compatibility ON OFF	(See Note 7)	Open collector ref to -input 1.2 Vdc max. Open circuit

INPUT SPECIFICATIONS (co	ontinued)	
Undervoltage lockout	48 Vin: power up 48 Vin: power dow	34 V vn 32.5 V
Start-up time (See Note 8)	Power up Remote ON/OFF	20 ms 20 ms
EMC CHARACTERISTICS		
Conducted emissions (See Note 3)	Bellcore 1089 FCC part 15 EN55022, CISPR22	Level A Level A 2 Level A
GENERAL SPECIFICATION	S	
Efficiency		See table
Isolation voltage	Input/case Input/output Output/case	1500 Vdc 1500 Vdc 1500 Vdc
Switching frequency	Fixed	500 kHz typ.
Approvals and standards (See Note 5)	VDE UL1	20805, EN60950, IEC950 950, CSA C22.2 No. 950
Case material		Aluminum baseplate with plastic case
Material flammability		UL94V-0
Weight		110 g (3.88 oz)
MTBF	Bellcore 332 MIL-HDBK-217F @ 40 °C, 100% full	1,400,000 hours min. 580,000 hours min. load
ENVIRONMENTAL SPECIF		
Thermal performance	Operating case ter Non-operating	mp40 °C to +100 °C -55 °C to +125 °C
Altitude	Operating Non-operating	10,000 feet max. 40,000 feet max.

# **Specifications Contd.**

Rev.03.08.07 bxb75s 3 of 4

OUTPUT POWER	INPUT	OVP	OUTPUT	OUTPUT CURRENT	OUTPUT CURRENT	EFFICIENCY	REGUL	ATION	MODEL
(MAX.)	VOLTAGE		VOLTAGE	(MIN.)	(MAX.)	(TYP.)	LINE	LOAD	NUMBER <sup>(7, 9,10)</sup>
50 W	36-75 Vdc	4.3 Vdc	3.3 V	0 A	15 A	79%	±0.05%	±0.1%	BXB75-48S3V3FLTJ
75 W	36-75 Vdc	6.5 Vdc	5 V	0 A	15 A	83%	±0.05%	±0.1%	BXB75-48S05FLTJ
75 W	36-75 Vdc	14.5 Vdc	12 V	0 A	6.25 A	84%	±0.05%	±0.1%	BXB75-48S12FLTJ

#### Notes

- 1 Measured with 10  $\mu F$  tantalum capacitor and 1  $\mu F$  ceramic capacitor across output.
- di/dt = 0.1 A/1 µs, Vin = 48 Vdc, Tc = 25 °C, load change = 0.5 lo max. to 0.75 lo 2 max. and 0.75 lo max. to 0.5 lo max.
- Units should be characterised within systems. External components required. 3 Input fusing is recommended based on surge current and maximum input 4 current.
- This product is only for inclusion by professional installers within other 5
- equipment and must not be operated as a stand alone product. Simulated source impedance of 12  $\mu$ H. 12  $\mu$ H inductor in series with +Vin. 6 Active high remote on/off option is available (standard product is active low), designate with the suffix 'FHT' e.g. **BXB75-48S05FHTJ**. Consult factory for 7 further details and options.
- 8 Start-up into resistive load.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. 9 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 10 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at http://www.artesyn.com/powergroup/products.htm to find a suitable alternative.

PIN CONNECTIONS		
PIN NUMBER	FUNCTION	
1	+ Vin	
2	Remote ON/OFF	
3	Case	
4	- Vin	
5	- Vout	
6	- Sense	
7	Trim	
8	+ Sense	
9	+ Vout	


PROTECTION	
Short circuit	Continuous, automatic recovery
Overvoltage	Non-latching
Undervoltage	Non-latching
Thermal	110 °C baseplate, automatic recovery
TELECOM SPECIFICATION	


Central office interface A

ETS300-132-2



Output can be externally trimmed by using the method shown.



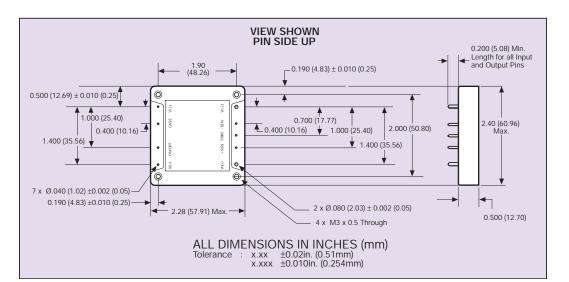

#### Americas

5810 Van Allen Way Carlsbad, CA 92008 USA Telephone: +1 760 930 4600 Facsimile: +1 760 930 0698 Rev.03.08.07 bxb75s 4 of 4

#### Europe (UK)

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

#### Asia (HK)

16th - 17th Floors, Lu Plaza 2 Wing Yip Street, Kwun Tong Kowloon, Hong Kong Telephone: +852 2176 3333 Facsimile: +852 2176 3888

For global contact, visit:


www.powerconversion.com

#### technicalsupport@powerconversion.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

#### **Emerson Network Power.**

The global leader in enabling business-critical continuity.



#### EmersonNetworkPower. com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2007 Emerson Electric Co.