


# PNP SILICON PLANAR MEDIUM POWER HIGH GAIN TRANSISTOR

ISSUE 1 - JANUARY 1997

**FZT1151A**

## FEATURES

- \*  $V_{CEO} = -40V$
- \* 3 Amp Continuous Current
- \* 5 Amp Pulse Current
- \* Low saturation Voltage
- \* High Gain

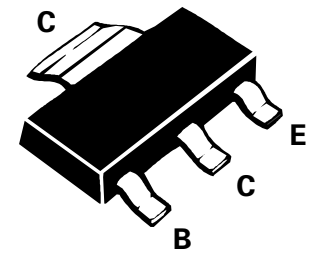

**SOT223**

## ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	-45	V
Collector-Emitter Voltage	$V_{CEO}$	-40	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Peak Pulse Current	$I_{CM}$	-5	A
Continuous Collector Current	$I_C$	-3	A
Base Current	$I_B$	-500	mA
Power Dissipation at $T_{amb}=25^{\circ}C$ †	$P_{tot}$	2.5	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$

† The power which can be dissipated assuming the device is mounted in a typical manner on a P.C.B. with copper equal to 2 inches x 2 inches

# FZT1151A







## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ ).

PARAMETER	SYMBOL	VALUE			UNIT	CONDITIONS.
		MIN.	TYP.	MAX.		
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-45	-95		V	$I_C = -100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{CES}$	-40	-90		V	$I_C = -100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{CEO}$	-40	-85		V	$I_C = -10\text{mA}^*$
Collector-Emitter Breakdown Voltage	$V_{CEV}$	-40	-90		V	$I_C = -100\mu\text{A}$ , $V_{EB} = +1\text{V}$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-8.5		V	$I_E = -100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$		-0.3	-100	nA	$V_{CB} = -36\text{V}$
Emitter Cut-Off Current	$I_{EBO}$		-0.3	-100	nA	$V_{EB} = -4\text{V}$
Collector Emitter Cut-Off Current	$I_{CES}$		-0.3	-100	nA	$V_{CE} = -32\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-60 -120 -140 -170 -200	-90 -180 -220 -260 -300	mV mV mV mV mV	$I_C = -0.1\text{A}$ , $I_B = -1.0\text{mA}^*$ $I_C = -0.5\text{A}$ , $I_B = -5\text{mA}^*$ $I_C = -1\text{A}$ , $I_B = -20\text{mA}^*$ $I_C = -1.8\text{A}$ , $I_B = -70\text{mA}^*$ $I_C = -3\text{A}$ , $I_B = -250\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-985	-1100	mV	$I_C = -3\text{A}$ , $I_B = -250\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-850	-1000	mV	$I_C = -3\text{A}$ , $V_{CE} = -2\text{V}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	270 250 180 100	450 400 300 190 45	800		$I_C = -10\text{mA}$ , $V_{CE} = -2\text{V}^*$ $I_C = -0.5\text{A}$ , $V_{CE} = -2\text{V}^*$ $I_C = -2\text{A}$ , $V_{CE} = -2\text{V}^*$ $I_C = -3\text{A}$ , $V_{CE} = -2\text{V}^*$ $I_C = -5\text{A}$ , $V_{CE} = -2\text{V}^*$
Transition Frequency	$f_T$		145		MHz	$I_C = -50\text{mA}$ , $V_{CE} = -10\text{V}$ $f = 50\text{MHz}$
Output Capacitance	$C_{cb}$		40		pF	$V_{CB} = -10\text{V}$ , $f = 1\text{MHz}$
Switching Times	$t_{on}$		170		ns	$I_C = -2\text{A}$ , $I_B = -20\text{mA}$ , $V_{CC} = -30\text{V}$
	$t_{off}$		460		ns	$I_C = -2\text{A}$ , $I_B = \pm 20\text{mA}$ , $V_{CC} = -30\text{V}$

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$ .


# FZT1151A

## TYPICAL CHARACTERISTICS

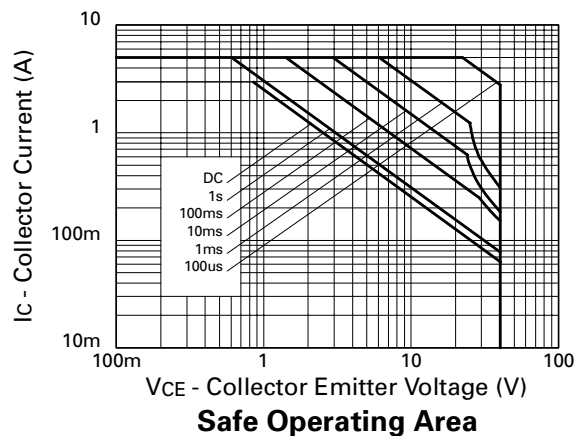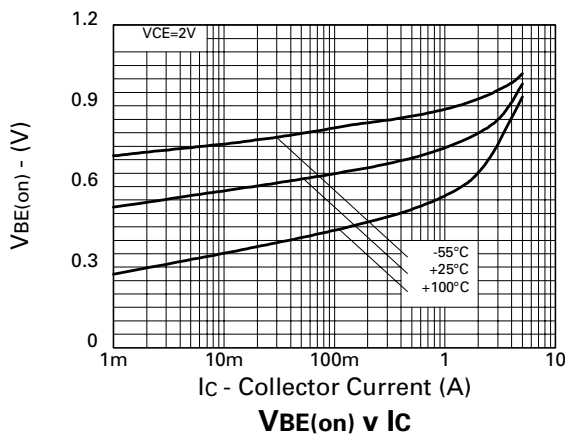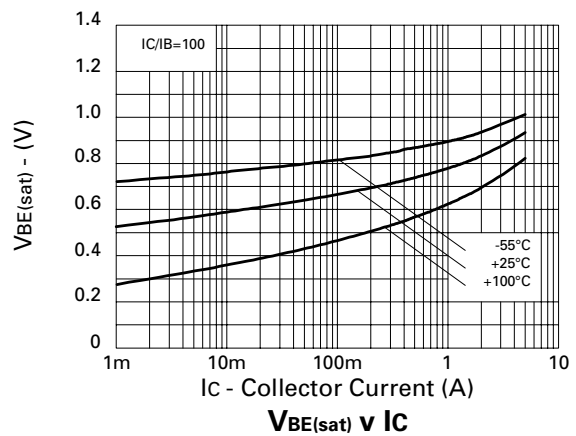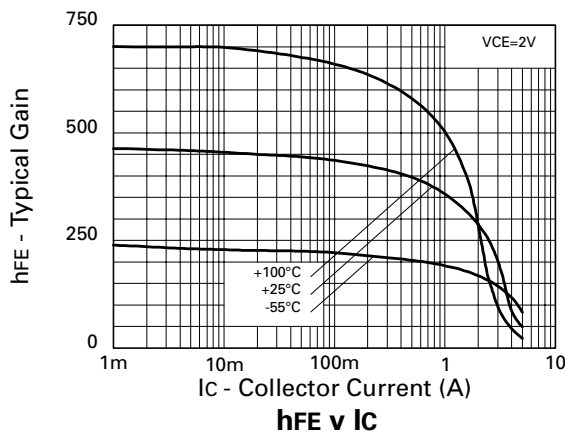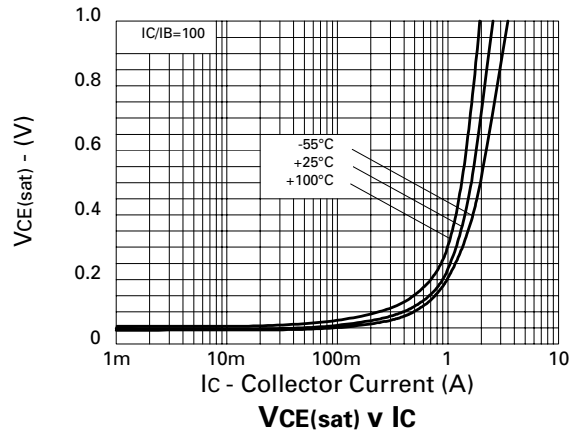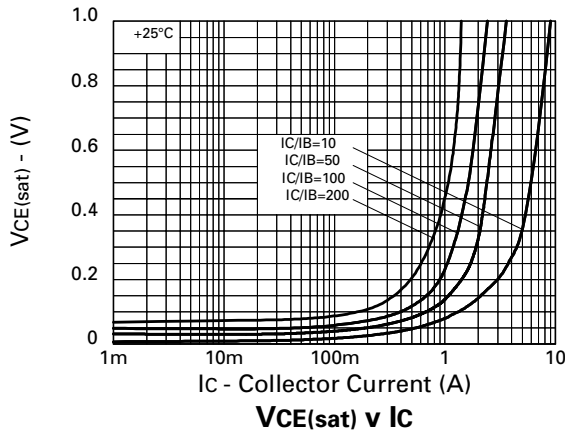

# FZT1151A

## THERMAL CHARACTERISTICS

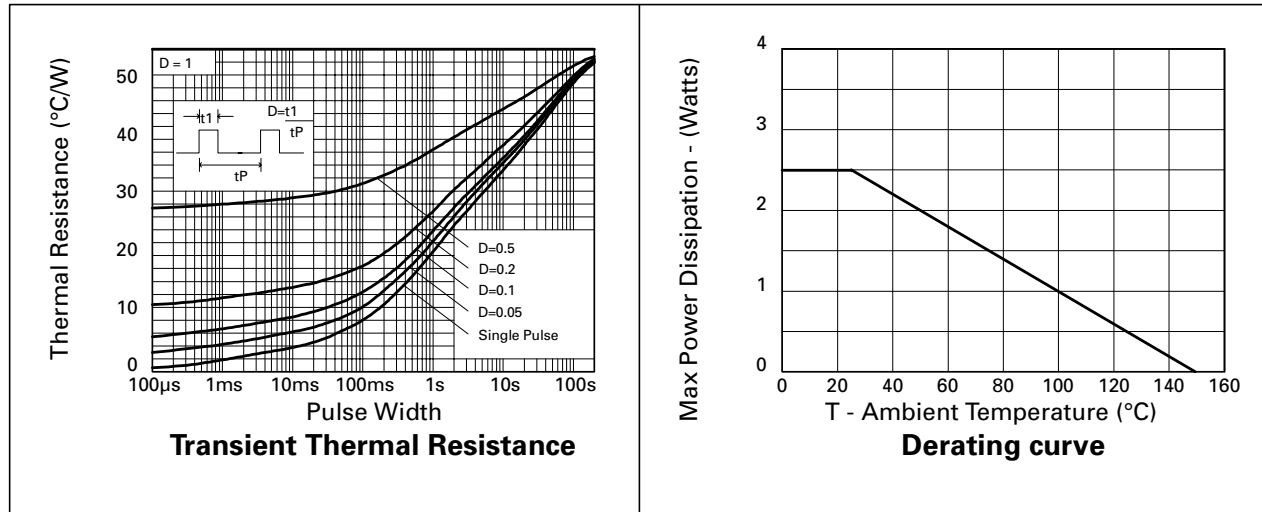

### SPICE PARAMETERS

\*ZETEX FZT1151A Spice model Last revision 12/12/96

\*

```
.MODEL FZT1151A PNP IS =1.7e-12 NF =1.004 ISE=1.02e-13
+ NE =1.55 BF =562 VAF=26.01 IKF=3.5 NR =.97
+ ISC= 1.5e-13 NC =1.3 BR =38 VAR=2.41 IKR=0.3
+ RE =25.37e-3 RB =250e-3 RC =25e-3 CJE=440e-12
+ CJC=160e-12 VJC=1.058 MJC= 0.5678 TF =0.8e-9 TR =55.5e-9
```

\*

© 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact (including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.