


BRIGHT RED MAN6160E, MAN6180E
GREEN MAN6460E, MAN6480E
HIGH EFF. RED MAN6960E, MAN6980E

PACKAGE DIMENSIONS

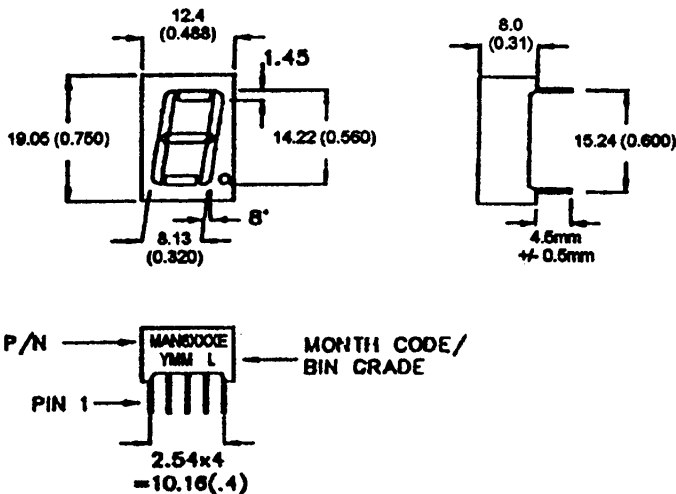

NOTES: Dimensions are in mm (inch).
 All pins are 0.5 (0.02) diameter
 Tolerances are ± 0.25 (0.1) unless otherwise noted.

FEATURES

- Easy to read digit
- Common anode or cathode
- Low power consumption
- Highly visible bold segments
- High brightness with high contrast
- White segments on a grey face for MAN64X0E and MAN61X0E.
- Red segments and red face for MAN69X0E
- Directly compatible with integrated circuits
- Rugged plastic/epoxy construction

APPLICATIONS

- Digital readout displays
- Instrument panels

MODEL NUMBERS

<u>Part number</u>	<u>Color</u>	<u>Description</u>
MAN6160E	Bright Red	Common Anode; right hand decimal
MAN6180E	Bright Red	Common Cathode; right hand decimal
MAN6460E	Green	Common Anode; right hand decimal
MAN6480E	Green	Common Cathode; right hand decimal
MAN6960E	High efficiency red	Common Anode; right hand decimal
MAN6980E	High efficiency red	Common Cathode; right hand decima

(For other color options, Contact your local area Sales Office)

ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$ unless otherwise specified)


	B.Red MAN 6160E 6180E	Green MAN 6460E 6480E	High Eff. Red MAN 6960E 6980E	Unit
Part number				
Continuous forward current (I_f) Per Segment	15	30	30	mA
Peak forward current per die (I_p) (at $f = 1.0$ KHz, Duty factor = 1/10)	50	160	160	mA
Power dissipation (P_D)	45*	100*	100*	mW
*Derate linearly from 25°C	See graphical data attached			
Reverse voltage per dice.....	5V			
Operating and Storage temperature range.....	- 40°C to $+85^\circ\text{C}$			
Lead soldering time (at 1/16 inch from the bottom of lamp).....	5 seconds @ 230°C			

ELECTRO - OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)


	Bright Red MAN 6160E 6180E	Green MAN 6460E 6480E	High Eff. Red MAN 6960E 6980E	Test Condition
Part number				
Luminous intensity (ucd)				$I_f = 10$ mA
minimum	300	800	900	
typical	700	2200	2200	
Forward voltage (V_f)				$I_f = 20$ mA
typical	2.1	2.1	2.0	
maximum	2.8	2.8	2.8	
Peak wavelength (nm)	697	570	635	$I_f = 20$ mA
Spectral line half width (nm)	90	30	45	$I_f = 20$ mA
Reverse breakdown voltage (V_R)	5	5	5	$I_r = 100$ uA

PINOUT


MAN6X60E - Common Anode

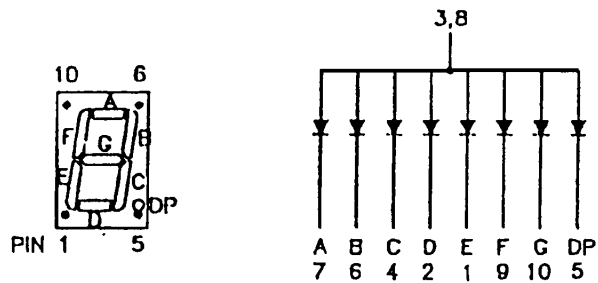


MAN6X80E - Common Cathode

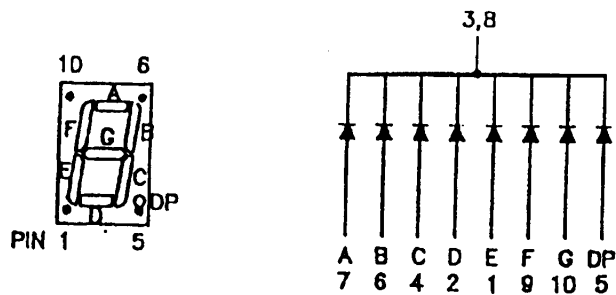


GRAPHICAL DETAIL: Bright Red ($T_A = 25^\circ\text{C}$ unless otherwise specified)

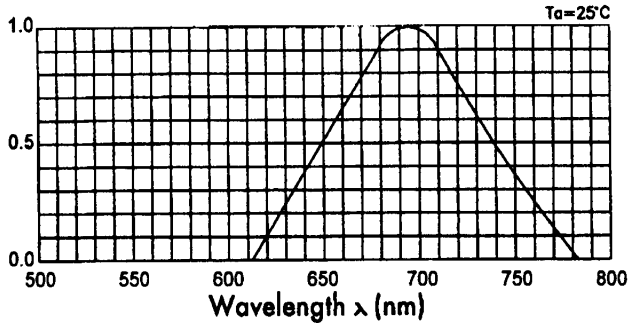


RELATIVE INTENSITY VS. WAVELENGTH




**FORWARD VOLTAGE (V_f)-volts
FORWARD CURRENT VS.
FORWARD VOLTAGE**




AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)

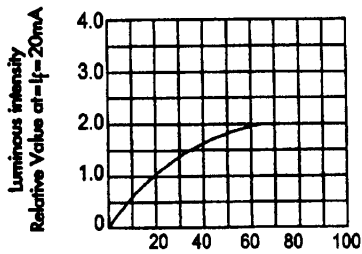

**I_f -Forward current-mA
RELATIVE LUMINOUS INTENSITY
VS. FORWARD CURRENT**




**AMBIENT TEMPERATURE ($^\circ\text{C}$)
VS. FORWARD CURRENT CAPACITY**

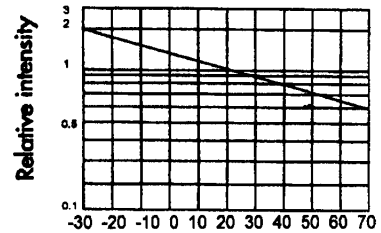


AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)


GRAPHICAL DETAIL: Green ($T_A = 25^\circ\text{C}$ unless otherwise specified)

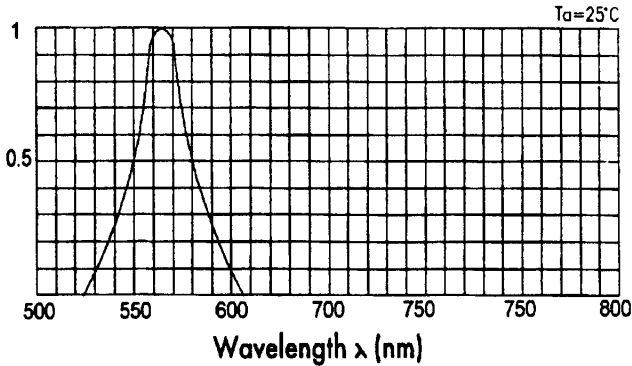


RELATIVE INTENSITY VS. WAVELENGTH




FORWARD VOLTAGE (V_f)-volts
FORWARD CURRENT VS.
FORWARD VOLTAGE




AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)

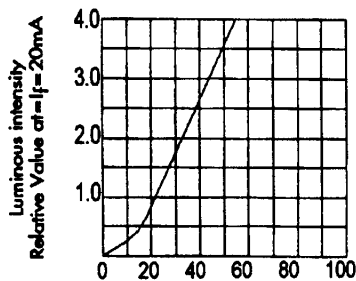

I_f -Forward current-mA
RELATIVE LUMINOUS INTENSITY
VS. FORWARD CURRENT




AMBIENT TEMPERATURE ($^\circ\text{C}$)
VS. FORWARD CURRENT CAPACITY

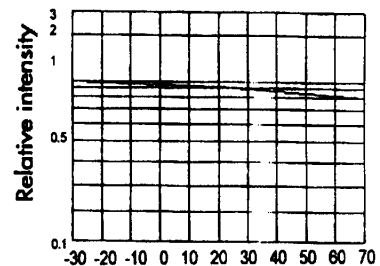


AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)


GRAPHICAL DETAIL: High Efficiency Red ($T_A = 25^\circ\text{C}$ unless otherwise specified)

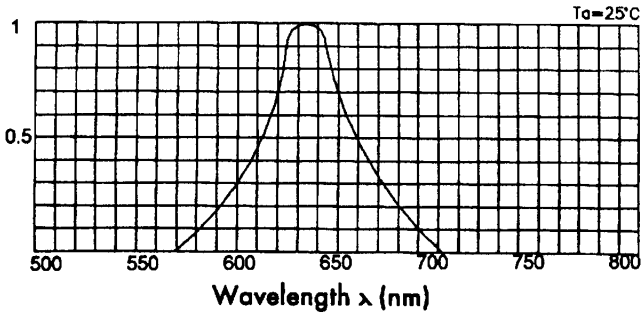


RELATIVE INTENSITY VS. WAVELENGTH




**FORWARD VOLTAGE (V_f)-volts
FORWARD CURRENT VS.
FORWARD VOLTAGE**




AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)

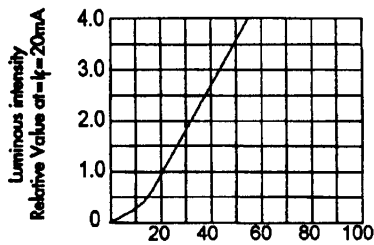

**I_f -Forward current-mA
RELATIVE LUMINOUS INTENSITY
VS. FORWARD CURRENT**



**AMBIENT TEMPERATURE ($^\circ\text{C}$)
VS. FORWARD CURRENT CAPACITY**

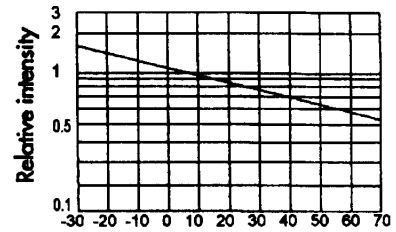

AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.