

GENERAL DESCRIPTION

The BestCap™ series of electrochemical supercapacitors offer excellent high power pulse characteristics based upon the combination of very high capacitance and ultra low ESR in the milliOhm region.

Based on a unique patented aqueous chemistry and an innovative design, the system offers high capacitance, even with short pulse duration regimes such as in GSM and PCS based systems, together with a variety of voltage ratings.

Depending upon package size, standard capacitance values of 30mF to 560mF are available in voltage ratings of 3.5V, 4.5V and 5.5V. ESR values for these standard devices range from 25 milliOhm to 230 milliOhm.

Used in conjunction with battery packs, BestCap™ improves the voltage performance for high current pulses, resulting in higher PA efficiency and longer battery talk-time as shown in Fig. 5. BestCap™ can also be used to boost instantaneous power availability in non-battery electronic applications where low level constant currents need to be supplemented by high current pulses.



APPLICATIONS

RF Modems	Mainframe Computer Decoupling	Memory Back-up
Hybrid Battery Packs	Hearing Aids	UPS
Camera Flash Systems	Prosthetics	Switch Mode Power Supplies
Audio System “Base Line Stiffeners”	Wireless Alarm Systems	
Systems/Products based on GSM/DSC1800/PCS/DECT/etc.		

PERFORMANCE CHARACTERISTICS & DIMENSIONS

AVX CATALOG PART NUMBER	Size (mm)	Rated Voltage Volts	Capacitance milli farads +80%, -20%	ESR (ohms) ohms +/-20% @1kHz	Leakage Current milli amps max
BZ015B303Z_B27	28 x 17 x 2.7	5.5	30	0.200	0.005
BZ014B353Z_B24	28 x 17 x 2.4	4.5	35	0.180	0.005
BZ013B403Z_B21	28 x 17 x 2.1	3.5	40	0.170	0.005
BZ015A503Z_B35	28 x 17 x 3.5	5.5	50	0.230	0.005
BZ014A603Z_B32	28 x 17 x 3.2	4.5	60	0.210	0.005
BZ013A703Z_B29	28 x 17 x 2.9	3.5	70	0.200	0.005
BZ015B603Z_B48	28 x 17 x 4.8	5.5	60	0.100	0.010
BZ014B703Z_B43	28 x 17 x 4.3	4.5	70	0.090	0.010
BZ013B803Z_B38	28 x 17 x 3.8	3.5	80	0.080	0.010
BZ015A104Z_B61	28 x 17 x 6.1	5.5	100	0.120	0.010
BZ014A124Z_B55	28 x 17 x 5.5	4.5	120	0.100	0.010
BZ013A144Z_B47	28 x 17 x 4.7	3.5	140	0.090	0.010

BZ025A204Z_B35	48 x 30 x 3.5	5.5	200	0.060	0.020
BZ024A234Z_B32	48 x 30 x 3.2	4.5	230	0.050	0.020
BZ023A284Z_B29	48 x 30 x 2.9	3.5	280	0.045	0.020
BZ025A404Z_B60	48 x 30 x 6.0	5.5	400	0.035	0.040
BZ024A474Z_B55	48 x 30 x 5.5	4.5	470	0.030	0.040
BZ023A564Z_B47	48 x 30 x 4.7	3.5	560	0.025	0.040

HOW TO ORDER

BZ
|

BESTCAP™

01
|

CASE SIZE

Where:

01 = 28mm x 17mm

02 = 48mm x 30mm

5
|

VOLTAGE

Where

5 = 5.5 volts

4 = 4.5 volts

3 = 3.5 volts

A
|

A = Standard
B = Thin

503
|

CAPACITANCE VALUE (μF)

First two numbers express the significant digits;
the third number refers to the number of zeros.

Example: 503 → 50,000μF = 50mF.

Z
|

CAPACITANCE TOLERANCE

Where:

Z = +80%, -20%

A
|

TERMINATION STYLE

Where:

A = Leaded

S = SMT

L = L lead

B
|

PACKAGE CODE

Where:

B = Bulk

35
|

MAXIMUM PART HEIGHT

Where:

29 = 2.9mm 42 = 4.2mm


32 = 3.2mm 53 = 5.3mm

35 = 3.5mm 60 = 6.0mm

BESTCAP™: A NEW GENERATION OF PULSE SUPERCAPACITORS

Supercapacitors, (also referred to as Electrochemical Capacitors or Double Layer Capacitors) have rapidly become recognized, not only as an excellent compromise between “electronic” capacitors such as ceramic, tantalum, film and aluminium electrolytic, and batteries (Fig. 1), but also as a valuable technology for providing a unique combination of characteristics, particularly very high energy, power and capacitance densities.


Fig. 1 Specific Energy of Capacitor Types

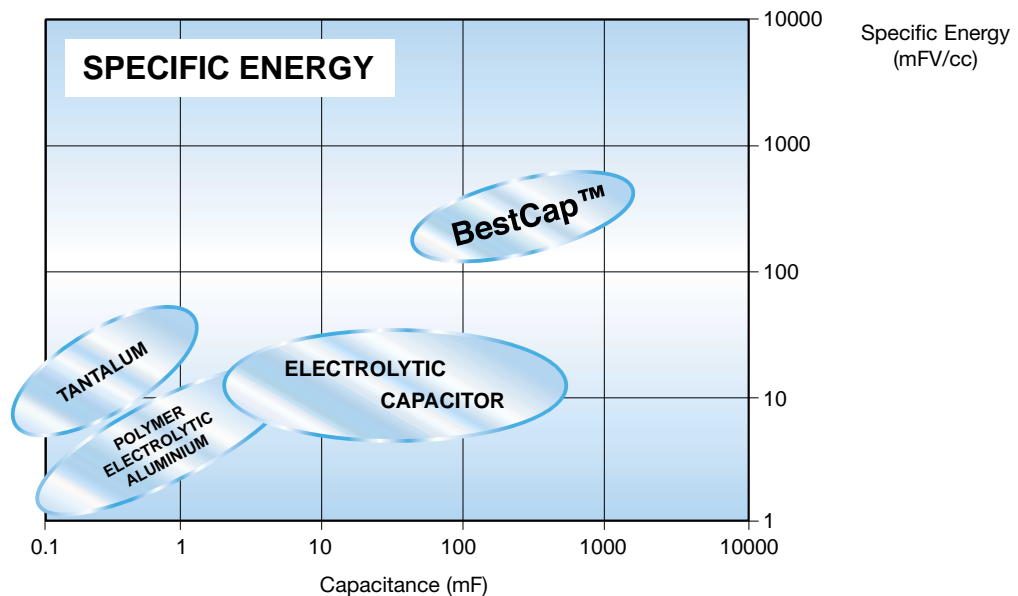

There are however, two negative characteristics associated with conventional supercapacitors, viz: high ESR in the Ohms or tens of Ohms area, and severe capacitance loss when called upon to supply very short duration current pulses. BestCap™ successfully addresses both of these drawbacks.

This capacitance loss in the millisecond region is caused by the charge transfer (i.e. establishment of capacitance) being carried out primarily by relatively slow moving ions in double layer capacitors. In the above-mentioned “electronic” capacitors, the charge transfer is performed by fast electrons, thereby creating virtually instant rated capacitance value. Fig. 2 illustrates the severe capacitance loss experienced by several varieties of supercapacitors (N, M & P), under short pulse width conditions. It can also be seen from Fig. 2, how well BestCap™ retains its capacitance with reducing pulse widths.

Fig. 2 Actual capacitance vs. pulse width

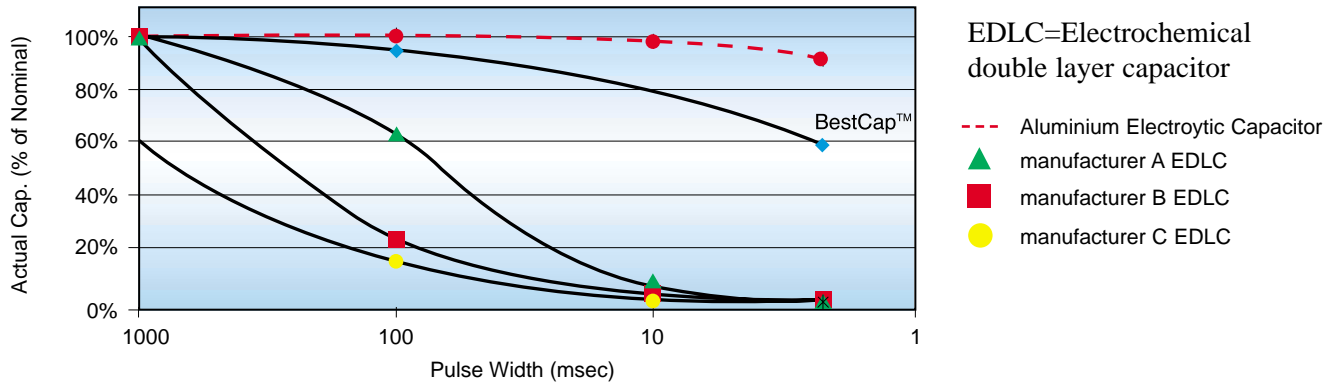

For comparison purposes, the characteristic of an equivalent capacitance value aluminium electrolytic capacitor is shown in Fig. 3. The electrolytic capacitor is many times the volume of the BestCap™.


Fig. 3 Sized comparison, BestCap™ vs aluminium electrolytic capacitor



VOLTAGE DROP

Two factors are critical in determining voltage drop when a capacitor delivers a short current pulse; these are ESR and “available” capacitance as shown in Fig. 4.

Fig 4 Voltage-time relation of capacitor unit

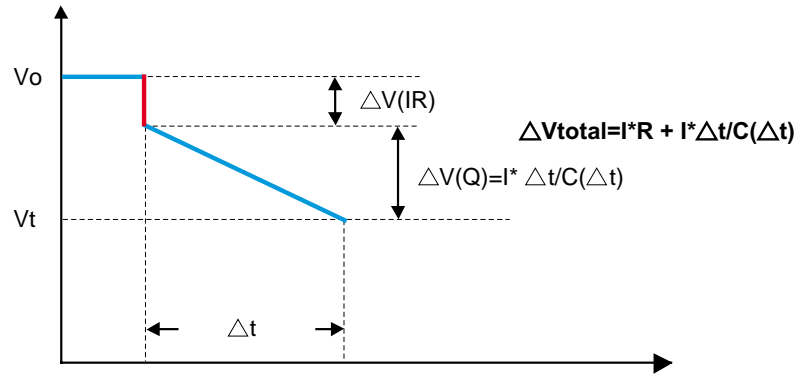


The instant voltage drop $\Delta V (IR)$ is caused by and is directly proportional to the capacitor’s ESR. The continuing voltage drop with time $\Delta V (Q)$, is a function of the available charge, i.e. capacitance.

From figures 3 and 4, it is apparent that, for very short current pulses, e.g. in the millisecond region, the combination of voltage drops in a conventional supercapacitor caused by a) the high ESR and b) the lack of available capacitance, causes a total voltage drop, unacceptable for most applications. Now compare the BestCap™ performance under such pulse conditions. The ultra-low, (milliOhm), ESR minimizes the instantaneous voltage drop, while the very high retained capacitance drastically reduces the severity of the charge related drop.

EFFICIENCY/TALKTIME BENEFITS OF BESTCAP™

Because BestCap™, when used in parallel with a battery, provides a current pulse with a substantially higher voltage than that available just from the battery as shown in Fig. 5, the efficiency of the RF power amplifier is improved.

Fig. 5 GSM Pulse

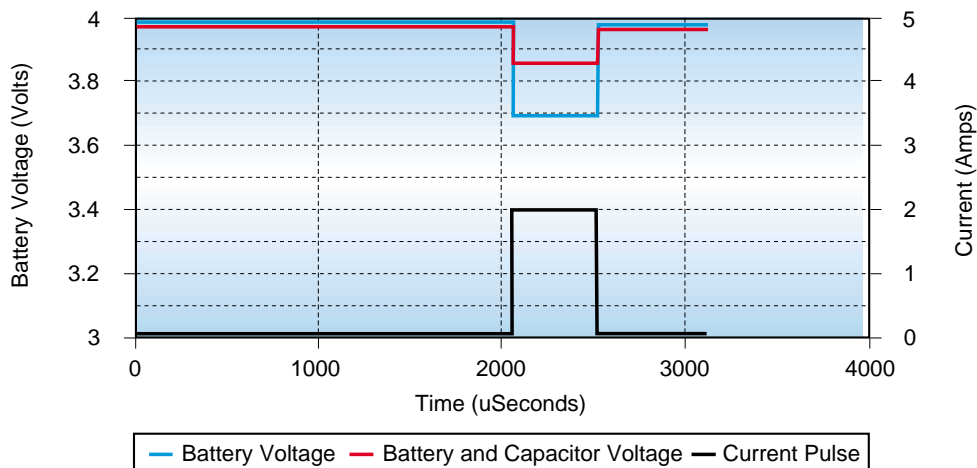

Additionally, the higher-than battery voltage supplied by the BestCap™ keeps the voltage pulse above the “cut off voltage” limit for a significantly longer time than is the case for the battery alone. This increase in “talktime” is demonstrated in figures 6a) (Li-Ion at +25°C); 6b) (Li-Ion at 0°C); 6c) (Ni-MH at +25°C) & 6d) (Ni-MH at 0°C).

Fig. 6a Li-ION Battery

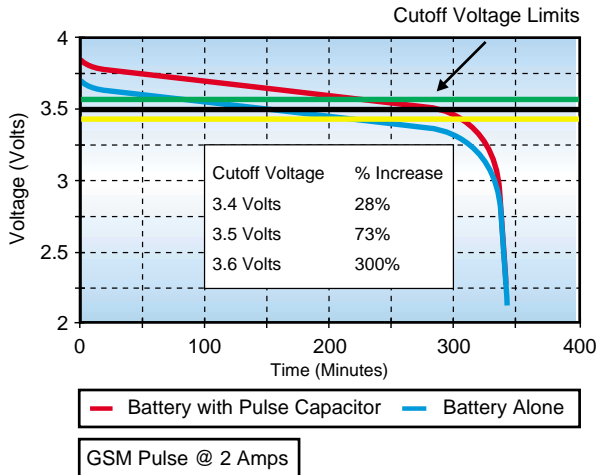


Fig. 6b Battery Life at 0°C

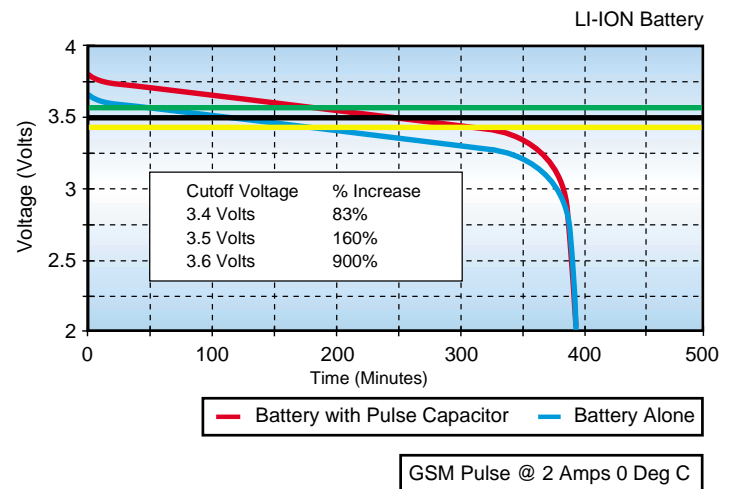


Fig. 6c NI-MH Battery


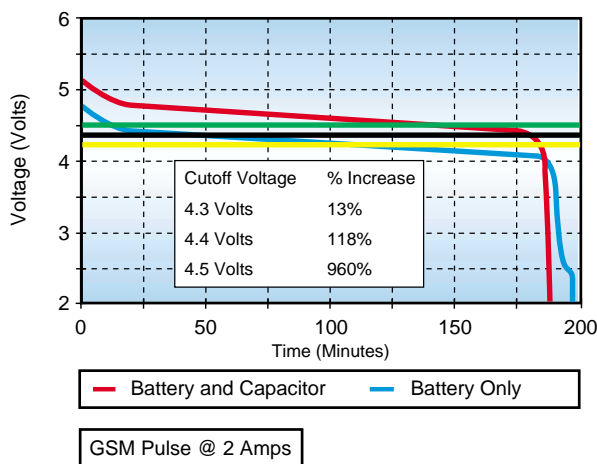


Fig. 6d Battery Life at 0°C

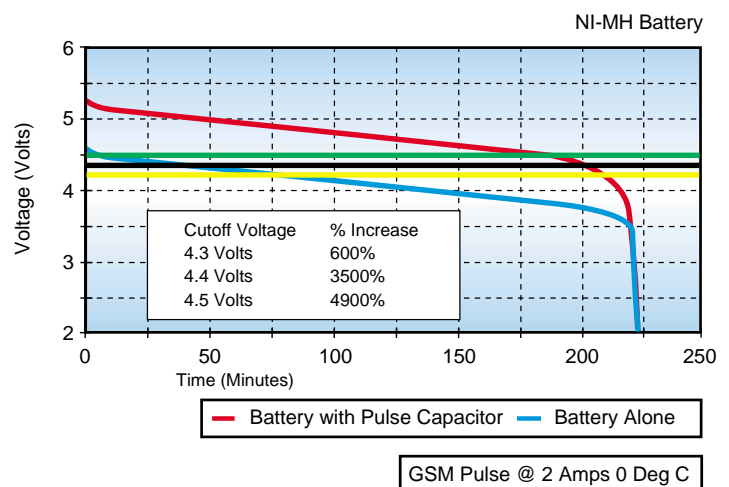


BESTCAP™ INRUSH CURRENT/SHORT CIRCUIT DISCHARGE CAPABILITIES


Testing of capacitors, including supercapacitors, is normally carried out using milliAmpere signals. However, for many applications it is important to know the true capability of the device in terms of inrush and discharge currents. In Figs. 7 & 8, shown below, show BestCap™ charging to 10 Amps max., (28 x 17mm version) and discharging with a peak current of 25 Amps (48 x 30mm version) into a load impedance of approximately 70 milliOhms.

Fig. 7 Inrush Characteristics

Current

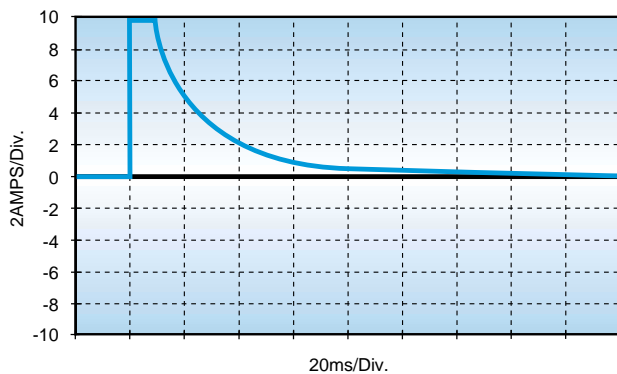


Voltage

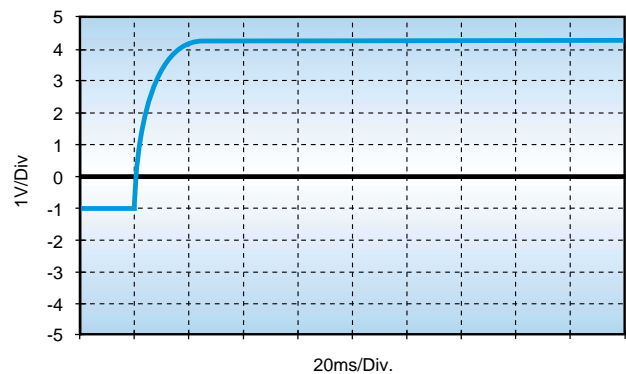


Charging to 5.5V with maximum current of 10Amps.

Fig. 8 Short-Circuit Discharge Characteristics

Current

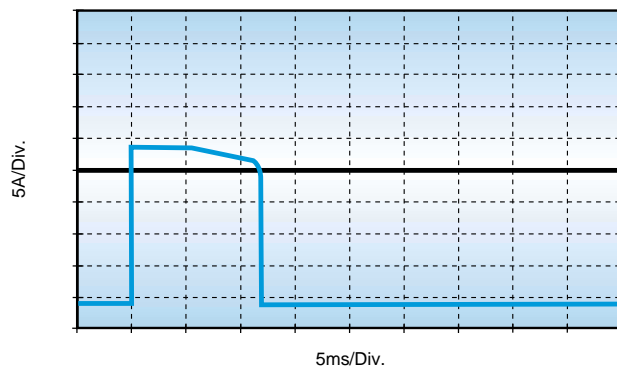

Voltage

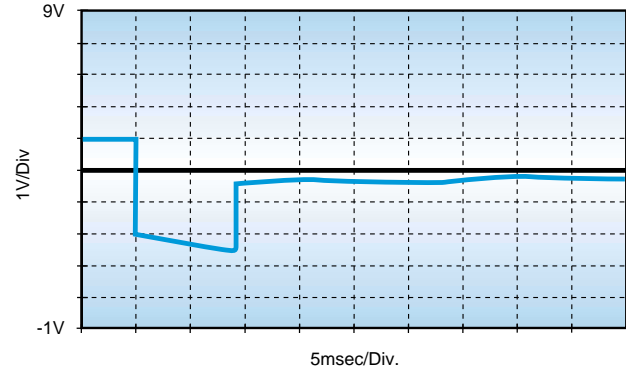

Discharge into load of 70 milliOhms; peak current = 25Amps.

These figures graphically illustrate the exceptional peak current handling capabilities of BestCap™.

BESTCAP™ IN BATTERY BACK-UP APPLICATIONS

BestCap™ is normally utilized as a power-boosting device to assist the main battery during pulse power demand periods. However, the capacitor may also be used as a back-up unit when, for example, the battery is being replaced.

Back-up time of the BestCap™ may be calculated using the following formula:

$$C = I * t / \Delta V$$

$$\Delta V = V_o - V_t - I * R_{ESR}$$

At low current (as is the case in the back-up application):

$$\Delta V = V_o - V_t$$

$$t = C\Delta V/I = C*(V_o - V_t)/I$$

Where

C is the Capacitance in F

V_o is the initial voltage

V_t is the end voltage

I is the back-up current drain in Amperes

R_{ESR} is the ESR in Ohms

t = back-up time in seconds

Example: System Clock Time Maintenance

Using a BZ015A503ZAB35 BestCap™ 5.5V, 50mF, 28 x 17 footprint, 3.5 mm (max) height

If V_o = 5.0V V_t = 2.5V I_(Back-up) = 40μA (40*10⁻⁶ Amp.)

The discharge current of the Cap shall be the sum of the back-up current drain plus leakage current.

Leakage Current is a function of the Capacitor voltage. In the specific case,

the Leakage Current is 5μA at 5.0V and it comes down to <1μA at 2.5V.

In the “worst” case the Leakage Current = 5μA. Practically, the Leakage Current is 3μA[(5+1)/2].

The total discharge current during the back-up period is

40μA (back-up) + 5μA (Leakage Current) = 45μA, in the worst case, or

40μA (back-up) + 3μA (Leakage Current) = 43μA, practically.

Thus the back-up time would be:

$$t = 50 * 10^{-3} * (5 - 2.5) / 45 * 10^{-6} = \mathbf{46 \text{ minutes}}$$

Engineering Guidance Notes

1. Operational and storage temperature

-20°C to +70°C. Storage at room temperature is recommended.

2. Voltage

Rated voltage of the capacitor is per the data sheet and the label on the product. A surge voltage of V rated +2% may be applied to the capacitor for <5 sec without damage or performance degradation.

3. Temperature/Voltage Recommendations

Temperature	-20°C to +35°C	+35°C to +70°C
Rated Voltage	Recommended Maximum Applied Voltage	
3.5V	3.5V	3.2V
4.5V	4.5V	4.2V
5.5V	5.5V	5.0V

4. Polarity

BestCap™ capacitors are non-polar, so can handle both positive and negative voltages. The polarity marking on

the label relates to internal test procedures only and may be ignored in normal use.

5. Mounting

BestCap™ may **not** be reflow or wave soldered. Hand soldering of the device is acceptable. When hand soldering, use a soldering iron of <30W rating and ensure that the tip temperature does not exceed +350°C. Duration of the soldering operation should be <3 sec. Mounting chips which may be automatically placed, (i.e. via Pick n' Place machine) and reflow soldered, and into which the BestCap™ may subsequently be inserted, are available for some versions of BestCap™. Please check with your AVX Sales Office for further information.

6. Other Precautions

- Do not disassemble the capacitor
- Do not dispose of the capacitor by incineration.
- Should the internal material come in contact with the skin or eyes, wash/rinse thoroughly with running water.

Other BestCap™ Characteristics

The material systems used in the Bestcap structure features the following characteristics:

- Completely non-toxic.
- Capable of very thin formats.
- Shock resistance to >30000G's.
- Various voltage ratings.
- Non-Polar.
- Low leakage current <0.2μA/mF.
- Capacitance values 30-560mF.



USA

AVX Myrtle Beach, SC
Corporate Offices
Tel: 843-448-9411
Fax: 843-448-1943

AVX Northwest, WA
Tel: 360-669-8746
Fax: 360-699-8751

AVX North Central, IN
Tel: 317-848-7153
Fax: 317-844-9314

AVX Northeast, MA
Tel: 508-485-8114
Fax: 508-485-8471

AVX Mid-Pacific, CA
Tel: 952-974-9155
Fax: 952-974-9179

AVX Southwest, AZ
Tel: 480-539-1496
Fax 480-539-1501

AVX South Central, TX
Tel: 972-669-1223
Fax: 972-669-2090

AVX Southeast, NC
Tel: 919-878-6357
Fax: 919-878-6462

AVX Canada
Tel: 905-564-8959
Fax: 905-564-9728

AVX Limited, England
European Headquarters
Tel: ++44 (0)1252 770000
Fax: ++44 (0)1252 770001

AVX S.A., France
Tel: ++33 (1) 69.18.46.00
Fax: ++33 (1) 69.28.73.87

AVX GmbH, Germany
Tel: ++49 (0) 8131 9004-0
Fax: ++49 (0) 8131 9004-44

EUROPE

AVX GmbH, Germany - Elco
Tel: ++49 (0) 2741 2990
Fax: ++49 (0) 2741 299299

AVX srl, Italy
Tel: ++390 (0)2 614571
Fax: ++390 (0)2 614 2576

AVX sro, Czech Republic
Tel: ++420 (0)467 558111
Fax: ++420 (0)467 523010

ASIA-PACIFIC

AVX/Kyocera, Singapore
Asia-Pacific Headquarters
Tel: (65) 258-2833
Fax: (65) 350-4880

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
Fax: (852) 2-765-8185

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
Fax: (82) 2-784-5411

AVX/Kyocera, Taiwan
Tel: (886) 2-2696-4636
Fax: (886) 2-2696-4237

AVX/Kyocera, China
Tel: (86) 21-6249-0314-16
Fax: (86) 21-6249-0313

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
Fax: (60) 4-228-1196

Elco, Japan
Tel: 045-943-2906/7
Fax: 045-943-2910

Kyocera, Japan - AVX
Tel: (81) 75-604-3426
Fax: (81) 75-604-3425

Kyocera, Japan - KDP
Tel: (81) 75-604-3424
Fax: (81) 75-604-3425

<http://www.avxcorp.com>