


4 3 2 1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED. COPYRIGHT 20

REVISIONS				
REV	DESCRIPTION	DATE	BY	APPD
B	ECR-06-019788	24AUG2006	EJH	SB
B1	REV PER ECR-11-006927	08AUG2011	DCH	CT

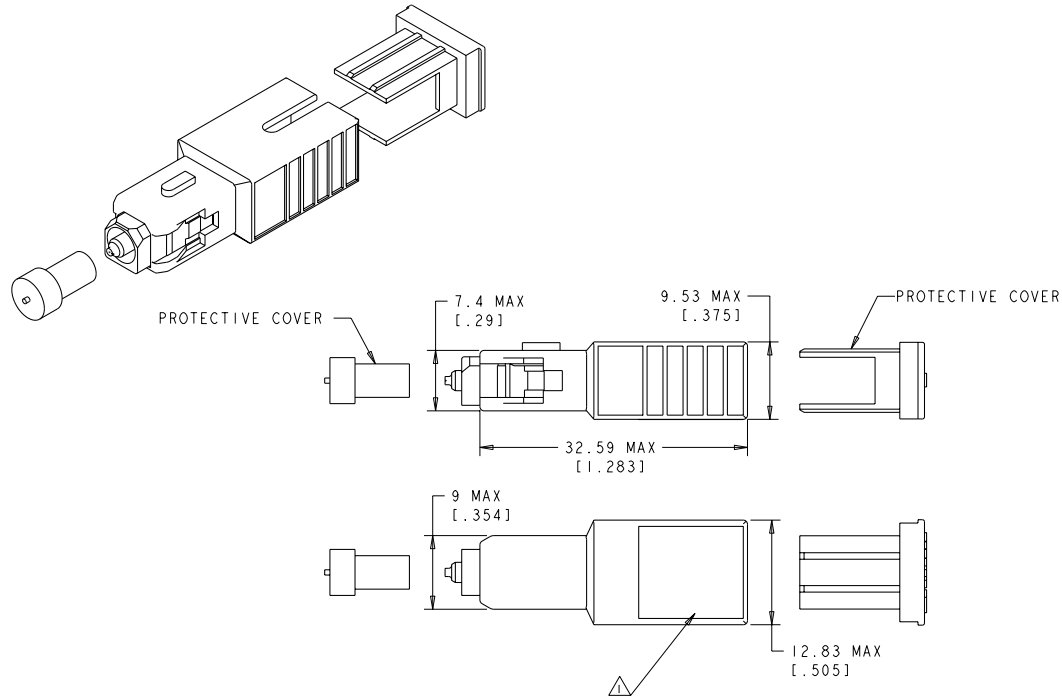

NOMINAL ATTENUATION VALUE (dB)	PART NUMBER
1	5209597-1
2	5209597-2
3	5209597-3
4	5209597-4
5	5209597-5
6	5209597-6
9	5209597-9
10	1-5209597-0
12	1-5209597-2
15	1-5209597-5
18	1-5209597-8
20	2-5209597-0
25	2-5209597-5
30	3-5209597-0

△ TE CONNECTIVITY LOGO, ATTENUATION VALUE, PART NUMBER, AND SERIAL NUMBER ARE PRINTED ON THE LABEL.

PERFORMANCE REQUIREMENTS:
 OPERATING WAVELENGTH : 1310/1550 ±25nm
 REFLECTANCE : ≤ -65dB
 OPERATING TEMPERATURE : -40°C TO +75°C
 ATTENUATION TOLERANCE, AMBIENT :
 FOR ATTENUATORS ≥ 5dB : ±10% OF NOMINAL ATTENUATION VALUE
 FOR ATTENUATORS < 5dB : ± 0.50dB
 MEASURED WITH REFERENCE QUALITY LAUNCH LEADS

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: 85DEC2005
 CHK: F. HOPKINS
 CDR: S. BLUCHTER
 APPR: S. BLUCHTER
 DATE: 85DEC2005

DIMENSIONS: mm (INCHES)
 TOLERANCES: OPTICALLY SPECIFIED

0 PLC ±.01
 1 PLC ±.02
 2 PLC ±.03
 3 PLC ±.04
 4 PLC ±.05
 ANGLES ±.05
 FINISH -

APPLICATION SPEC: -
 WEIGHT: -
 MATERIAL: -
 FINISH: -

TE Connectivity
 ATTENUATOR, OPTICAL, BUILDOUT SC/APC
 8 DEGREE, SM, DUAL WINDOW

SHEET: A2 CASE CODE: - DRAWING NO: 5209597 RESTRICTED TO: -
 CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV: B1