
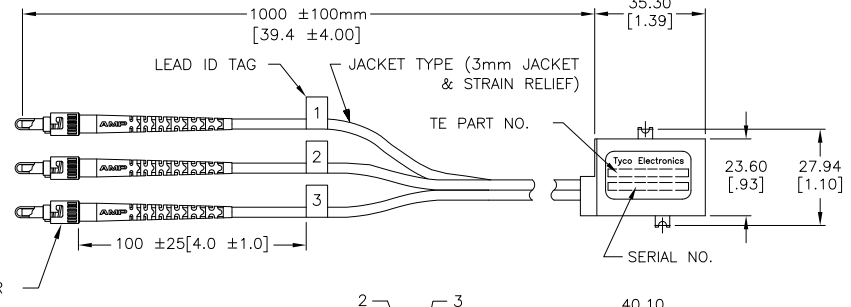



4 3 2 1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
EA	51	P	LTR	DESCRIPTION	DATE	OWN	APVD
		G		ECR 08-001223	16JUL08	LGE	RP

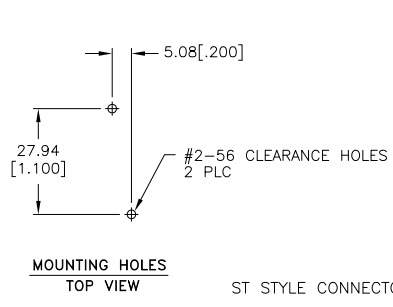

PART NO.	FIBER TYPE	
99427-1	50/125/250	OBSOLETE
99427-2	62.5/125/250	OBSOLETE
99427-3	100/140/250	OBSOLETE

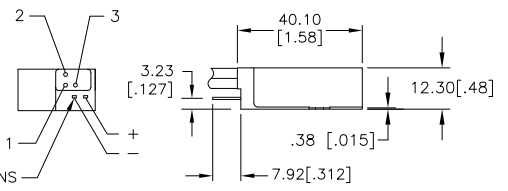

PERFORMANCE SPECIFICATIONS
 TESTED PER FOTP-34 METHOD A2
 INSERTION LOSS DATA INCLUDES TWO CONNECTED PAIRS
 INSERTION LOSS POWER OFF, FIBER 2 TO 1 1.8dB MAX
 POWER ON, FIBER 2 TO 3 1.8dB MAX
 OPTICAL CROSSTALK </=-45dB MAX PER FOTP-42
 OPERATING WAVELENGTH 750 TO 1450nm
 TESTED WAVELENGTH 1300nm
 POWER REQUIREMENTS 4.0 TO 5.5 VOLTS, 80ma MAX AT 5.0 VOLTS
 SWITCHING SPEED 10 MILLISECONDS MAX

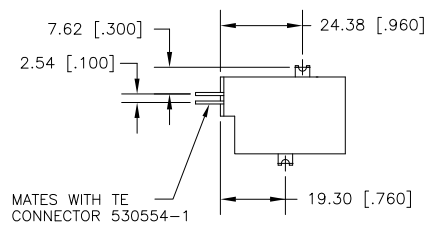

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN EMIL T.B. 04/16/96	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: MM [inches]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 1.27 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± 2'	CHK A. McCLISH 12/15/96	NAME SW11 1X2 GOLD (STRAIGHT PIN)	
		APVD A. McCLISH 12/15/96	RESTRICTED TO	
MATERIAL	FINISH	PRODUCT SPEC	SIZE A3	CAGE CODE 00779
		APPLICATION SPEC	DRAWING NO C=99427	SCALE NONE
		WEIGHT	SHEET 1	OF 1
		CUSTOMER DRAWING	REV G	