

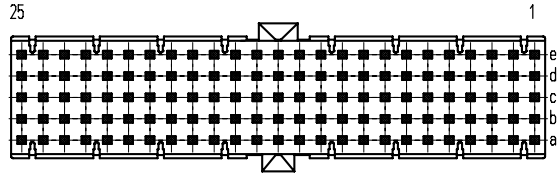



Bestückungsplan - *contact layout*

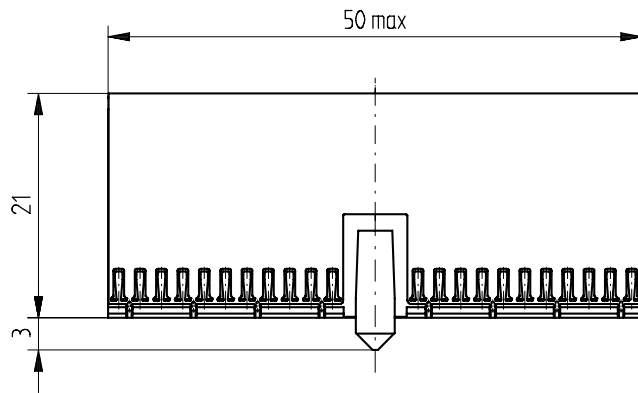

■ = bestückt - *assemble*

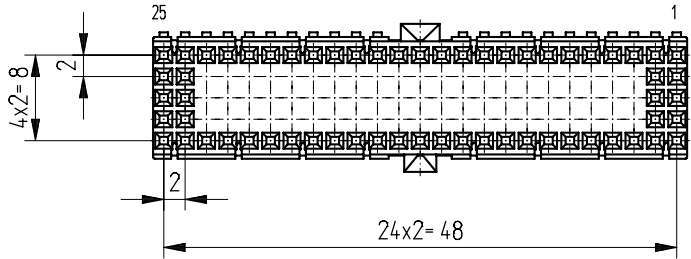


EE-Zone für durchkontaktierte Löcher  $\Phi 0.6 \pm 0.05$   
*Compliant zone for thru hole  $\Phi 0.6 \pm 0.05$*

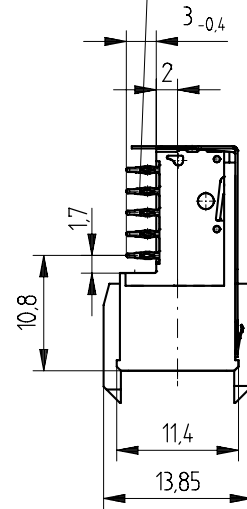

Lochbild für Leiterplatte  
*(Bestückungsseite)*

*Board hole pattern  
 (Component mounting side)*

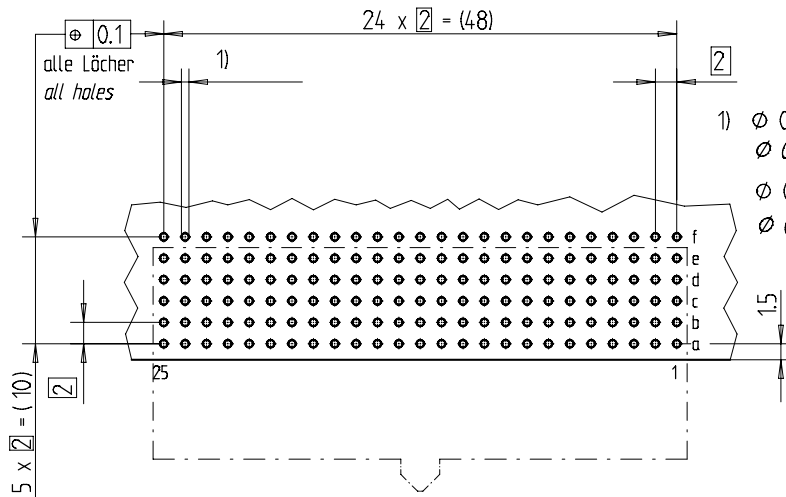

- 1)  $\Phi 0.6 \pm 0.05$  Durchmesser des metallisierten Loches  
 $\Phi 0.6 \pm 0.05$  Diameter of finished plated-through hole
- $\Phi 0.7 \pm 0.02$  Bohrungsdurchmesser des Loches  
 $\Phi 0.7 \pm 0.02$  Diameter of drilled hole

Fehlende Masse und Angaben nach IEC 61076-4-101  
*Missing information and dimensions per IEC 61076-4-101*

ⓑ Bedruckung siehe Zeichnung 401194  
*Marking see drawing 401194*

Schichtaufbau im metallisierten Loch  
 siehe Zeichnung 114406

*Metal plating of plated-through hole  
 see drawing 114406*

Consider protection memo from DIN 34	Information: Abschirmblech oben montiert <i>shielding mounted on top</i>	Tolerances All Dimensions in mm	Scale 2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation ERmet Federleiste AB <i>ERmet Female Type AB</i>
c Index	09.06.2006 Date	www.ERNI.com	114538 ERMAB