

**FEATURES**

- Ultra high power output
- Four wire bonds on die corners
- Very uniform optical beam
- Standard 3-lead TO-39 hermetic package
- Chip size .030 x .030 inches

All surfaces are gold plated. Dimensions are nominal values in inches unless otherwise specified. Two cathode pins **must be** externally connected together.



**ELECTRO-OPTICAL CHARACTERISTICS AT 25°C**

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS	
Total Power Output, P <sub>o</sub>	I <sub>F</sub> = 500mA I <sub>F</sub> = 10A	80	100 1300		mW	
Radiant Intensity, I <sub>e</sub>	I <sub>F</sub> = 500mA		60		mW/sr	
Peak Emission Wavelength, λ <sub>p</sub>	I <sub>F</sub> = 50mA		880		nm	
Spectral Bandwidth at 50%, Δλ			80		nm	
Half Intensity Beam Angle, θ				110		Deg
Forward Voltage, V <sub>F</sub>		I <sub>F</sub> = 500mA		1.65	2	Volts
Reverse Breakdown Voltage, V <sub>R</sub>	I <sub>R</sub> = 10μA	5	30		Volts	
Capacitance, C	V <sub>R</sub> = 0V		90		pF	
Rise Time			0.7		μsec	
Fall Time			0.7		μsec	

**ABSOLUTE MAXIMUM RATINGS AT 25°C CASE**

Power Dissipation <sup>1</sup>	1000 mW
Continuous Forward Current	500mA
Peak Forward Current (10μs, 400Hz) <sup>2</sup>	10A
Reverse Voltage	5V
Lead Soldering Temperature (1/16" from case for 10sec)	260°C

<sup>1</sup>Derate per Thermal Derating Curve above 25°C

<sup>2</sup>Derate linearly above 25°C

**THERMAL PARAMETERS**

Storage and Operating Temperature Range	-55°C to 100°C
Maximum Junction Temperature	100°C
Thermal Resistance, R <sub>THJA</sub> <sup>1</sup>	145°C/W Typical
Thermal Resistance, R <sub>THJA</sub> <sup>2</sup>	75°C/W Typical



<sup>1</sup>Heat transfer minimized by measuring in still air with minimum heat conducting through leads

<sup>2</sup>Air circulating at a rapid rate to keep case temperature at 25°C









750 Mitchell Road, Newbury Park, California 91320  
 Phone: (805) 499-0335, Fax: (805) 499-8108  
 Email: sales@optodiode.com, Website: www.optodiode.com

MAXIMUM RATINGS

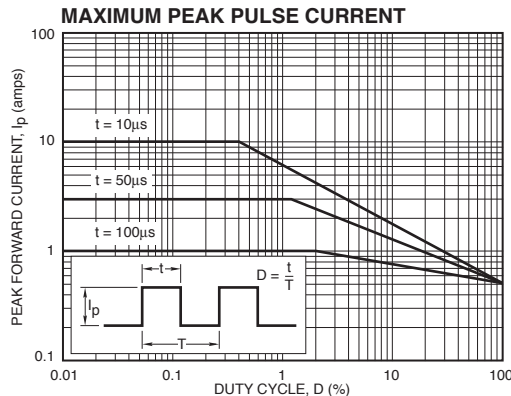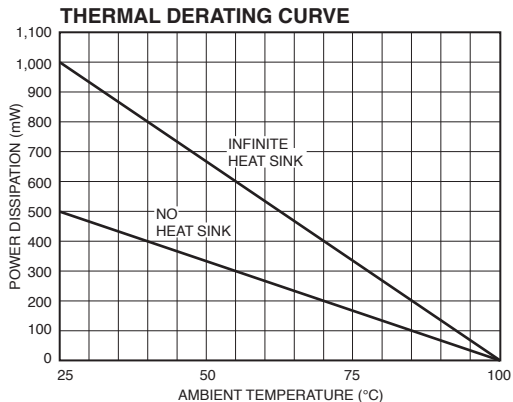

TYPICAL CHARACTERISTICS

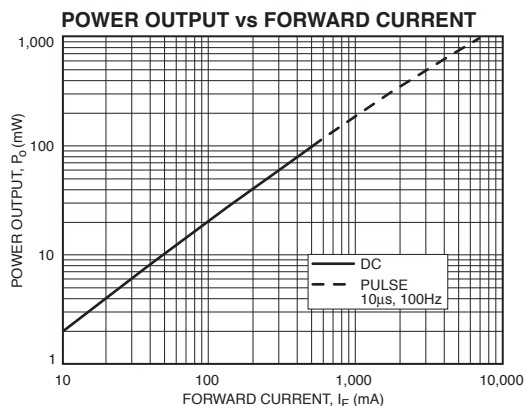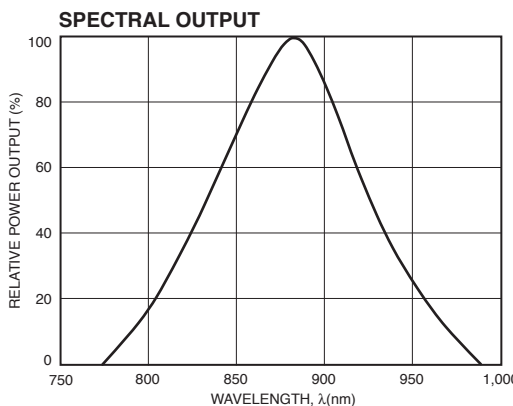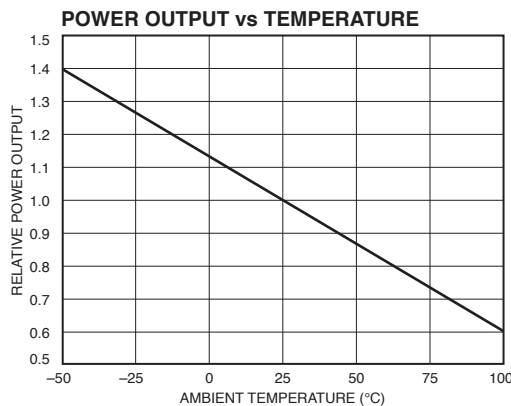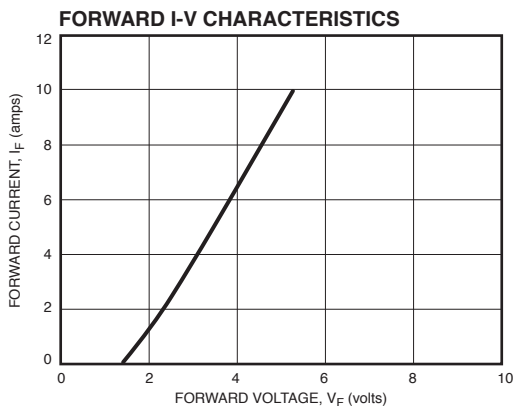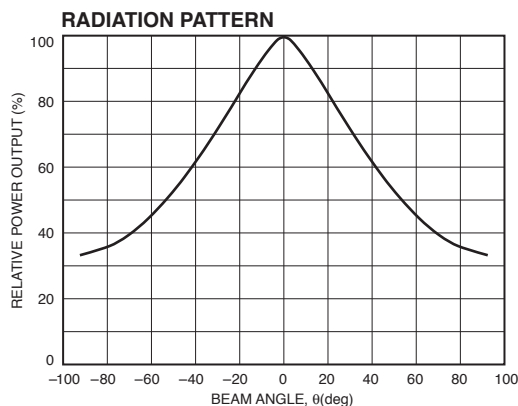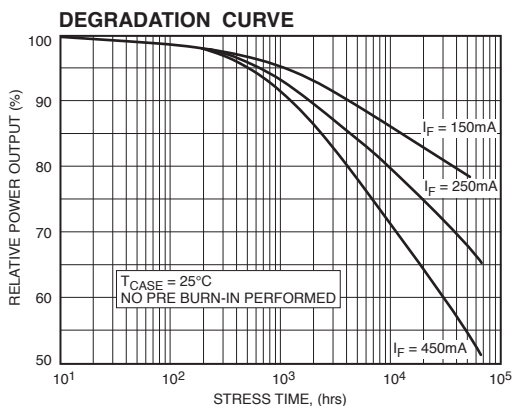

750 Mitchell Road, Newbury Park, California 91320  
 Phone: (805) 499-0335, Fax: (805) 499-8108  
 Email: sales@optodiode.com, Website: www.optodiode.com