



## A1035-D

Positioning Products



## No compromises - just the best GPS performance

With superb sensitivity and fast Time To First Fix, the A1035-D is the high performance GPS antenna solution for many applications. Featuring the SiRFStar III low power chip optimally merged with a patch antenna, one can integrate this module in the easiest way without in-depth RF know-how. With its own ground plane it optimizes sensitivity and independency of the surrounding electronics. Via a board-to-board connector, power is supplied and information is transmitted on an UART CMOS level interface. With the outstanding performance of the SiRFStar III chipset, obtaining your position is now easier than ever.

- Bench marking sensitivity ■ -159 dBm tracking
- Fastest TTFF (Time To First Fix) ■ < 35 s under cold start condition (typical)
- Ultra-low power consumption ■ 92 mW average in tracking mode
- Most accurate position ■ 2 m CEP with SBAS support
- Field replaceable ■ Standard power I/O connector

# Positioning Receiver Portfolio

With the mission to support our customers in implementing GPS functionality into their systems, Vincotech is offering a large product portfolio to cover almost all integration possibilities in an easy way. A dedicated R&D team located in the Munich region, Germany, develops sensitive positioning solutions based on state of the art technologies. All GPS products are manufactured in our ISO9001 and TS16949 certified factory in the EU. Our modules comply to the RoHS standard and are 100% electrically and functionally tested prior to packaging. This way we constantly guarantee high quality products.

## PRODUCTS SHOWN IN ACTUAL SIZE

### GPS Receivers




AI080-A

AI082-A

AI084-A

AI088-A

### Smart Antenna Modules

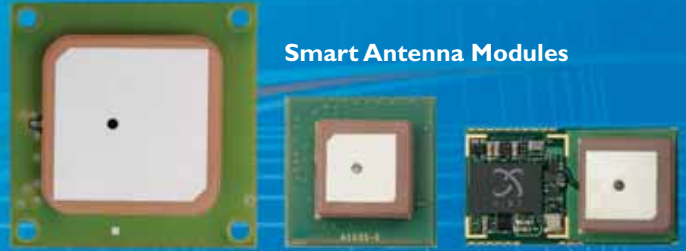

AI035-D

AI035-E

AI035-H

#### GPS Receivers


	Supply voltage / V	Current draw @ fix per sec / mA	Operating temperature / °C	Low Power Mode Trickle Power	Low Power Mode Push-To-Fix	Low Power Mode Keep Ephemeris Alive	AGPS Ephemeris Push	Active antenna	Passive antenna	2nd antenna input	Antenna switch	Internal antenna supply	Firmware update (Flash)	ROM	SBAS support	Back-up battery option	Shielding lid	AEC-Q compliant components	Size / mm <sup>2</sup>
AI080-A	3.3	23	-30/85	■	■		■	■				■			■	■			19x16
AI080-B	3.3	23	-40/85	■	■		■	■				■			■	■			19x16
AI082-A	1.8	35	-30/85			■		■						■		*			14x12
AI084-A	3.3	26	-30/85	■	■		■	■	■	■	■	■			■	■	■	■	15x15
AI084-B	3.3	26	-30/85	■	■		■	■	■	■	■	■			■	■	■	■	15x15
AI088-A	3.3	30	-40/85	■	■		■	■				■			■	■	■	■	28x19

\*SRAM backup possible with Enable pin

#### Smart Antenna Modules

	Antenna type	Circular polarisation	Linear polarisation	Plug-in module	SMD solderable	External antenna pin	Shielding lid	Size / mm <sup>2</sup>	Based on GPS receiver
AI035-D	patch	■		■			■	35x35	AI080-A
AI035-E	patch	■		■			■	21x21	AI082-A
AI035-H	patch	■			■	■	■	30x17	AI084-A
AI085-A**	chip	■	■	■	■	■	■	31x17	AI080-A
AI086-A**	meander	■	■	■	■	■	t.b.d.	25x15	AI084-A
AI086-B**	meander	■	■	■	■	■	t.b.d.	25x15	AI084-A

\*\*product planned



## Technical Details AI035-D

### PERFORMANCE

<b>Channels</b>	20 parallel tracking
<b>Correlators</b>	200,000 plus
<b>Frequency</b>	L1 - 1,575 MHz
<b>Sensitivity</b>	
Tracking	-159 dBm
Acquisition (cold start)	-142 dBm
<b>Position accuracy (horizontal)</b>	< 2.5 m CEP autonomous < 2.0 m CEP SBAS
<b>Time To First Fix</b>	
Hot start <sup>1)</sup>	< 1 s
Warm start <sup>2)</sup>	< 35 s
Cold start <sup>3)</sup>	< 37 s

### COMMUNICATION

<b>Standard GPS software</b>	
NMEA message switchable	GGA, GSA, GSV, VTG, RMC, GLL
Baud rate	4,800 (default) to 115,200
<b>Serial ports</b>	3.3V CMOS compatible
Tx0	NMEA output
Rx0	NMEA input

1) The receiver has estimates of time/date/position and valid almanac and ephemeris data.  
2) The receiver has estimates of time/date/position and almanac.  
3) The receiver has no estimate of time/date/position, and no recent almanac.

The information provided herein is believed to be reliable at press time. Vincotech assumes no responsibility for inaccuracies or omission. Vincotech assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Vincotech does not authorize or warrant any of its products for use in lifesupport devices and/or systems.

### ENVIRONMENT

<b>Temperature</b>	
Operating	-30°C to +85°C
Storage	-40°C to +85°C
<b>Humidity</b>	Non-condensing

### POWER

<b>Input voltage</b>	3.0 to 3.6 VDC
<b>Current draw</b>	
Acquisition	33 mA (typical)
Tracking	28 mA (typical)
Standby	20 µA (typical)

### CONNECTOR

<b>Data &amp; power</b>	Standard 1.27 mm (0.05") double row, low profile socket with 22 pins
-------------------------	--

### MECHANICAL

<b>Dimensions</b>	35.6 x 35.6 x 8.0 mm <sup>3</sup>
	1.4" x 1.4" x 0.315"
<b>Weight</b>	12 g / 0.42 oz.

## YOUR PARTNER

Vincotech GmbH  
Biberger Straße 93  
82008 Unterhaching/Germany

Phone +49 (0)89 8780 67-0  
Fax +49 (0)89 8780 67-300

[www.vincotech.com/gps](http://www.vincotech.com/gps)

 **incotech**  
power.position.service