



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	8/19/97
A	WIRE DIAGRAM CHNGS	10/31/00
B	CONVERT TO CAD	6/6/01
C	ADD HOLE DIA.	3/15/02

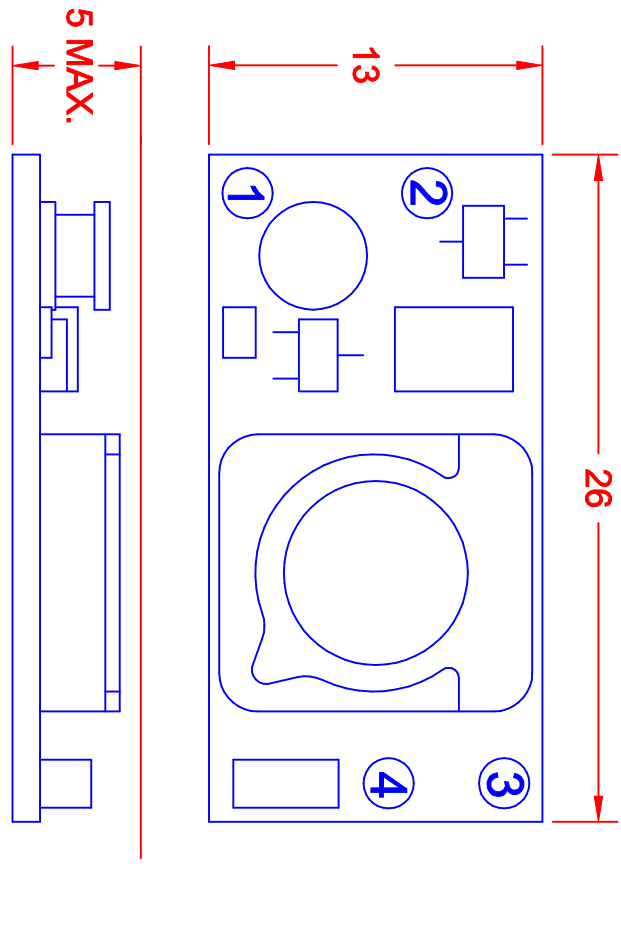


CHARACTERISTICS			
	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	4.5	5.0	5.5
INPUT CURRENT: (mA)	200	250	300
OUTPUT VOLTAGE: (Vrms)	600	650	700
OUTPUT CURRENT (maRms)	4.0	4.5	5.0
OUTPUT FREQUENCY: (KHz)	70	80	90
OPERATING TEMP: (CELSIUS)	0	25	50

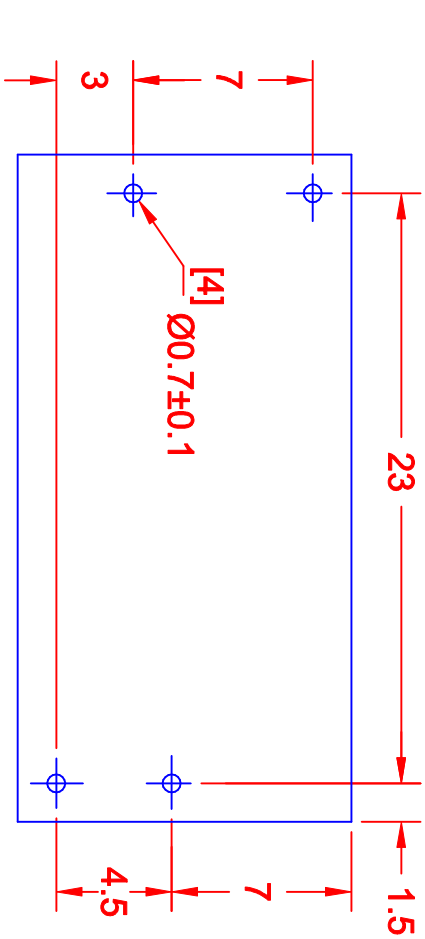

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)
3	OUT GND
4	V OUT

TOLERANCE	
L < 20	±0.2
20 ≤ L < 50	±0.3
50 ≤ L < 100	±0.4
100 ≤ L	±0.5

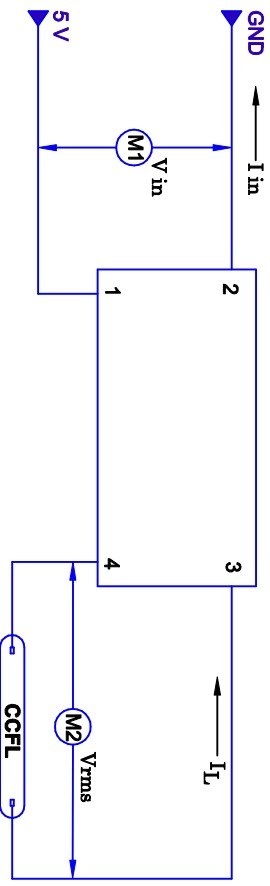

METRIC	DIMENSIONS ARE IN MILLIMETERS	JKL COMPONENTS CORPORATION	
THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	5 V CCFL POWER SUPPLY	
1 PL +/- 0.2	2 PL +/- 0.2	SCALE	SIZE
ANGLE +/-	0	A	55335
L. WENGSTROM	DATE	FSCH NO.	DRAWING NO.
3/15/02	3/15/02	BXA-502	BXA-502
- CAD DRAWING -		SCALE	DATE
MANUAL REVISIONS NOT PERMITTED		NONE	8/19/97
		REV.	SHEET
		C	OF