

## Low-Noise, High-Linearity Packaged pHEMT FET

### Description:

The CFH 400 is a high-linearity pHEMT FET that exhibits both a high intercept point and low noise figure. The device is suitable for front-end applications to 4 GHz such as PCS CDMA and UMTS receivers, base stations LNAs, and WLAN front-ends. The device achieves a noise figure as low as 0.55 dB with 15 dB associated gain at 1.8 GHz. It is packaged in a low-cost SOT343 package. All devices are 100% DC tested on-wafer and lot RF tested after packaging.


### Features:

- Low Noise figure and high associated gain for high IP3 receivers stages
- Frequencies to 4 GHz
- NF=0.55 dB; Ga=15.7 dB @ f=1.8 GHz, 3V, 10 mA
- Low cost miniature SOT343 package
- Lg = 0.4um; Wg = 400um
- Tape and reel packaging

### Applications:

- PCS CDMA and UMTS Receivers
- WLAN Multicarrier Receivers
- Basestations

### Package Outline, SOT343:

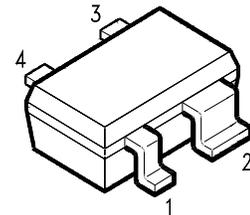

#### Pin assignment:

- 1 = gate
- 2 = source
- 3 = drain
- 4 = source

# CFH 400 Preliminary Datasheet

## Maximum Ratings:

Parameter	Symbol		Unit
Drain-source voltage	$V_{DS}$	5.5	V
Drain-gate voltage	$V_{DG}$	6.5	V
Gate-source voltage	$V_{GS}$	-2.0	V
Drain current	$I_D$	80	mA
Channel temperature	$T_{Ch}$	150	°C
Storage temperature range	$T_{stg}$	-65...+150	°C
Total power dissipation ( $T_S \leq tbd^{\circ}C$ ) <sup>2</sup>	$P_{tot}$	150	mW
<b>Thermal resistance</b>			
Channel-soldering point source	$R_{thChS}$	166	K/W

1) Dimensions see page 4

2)  $T_S$ : Temperature measured at soldering point

## Electrical characteristics:

at  $T_A = 25^{\circ}C$  unless otherwise specified

Characteristics	Symbol	min	typ	max	Unit
Drain-source saturation current $V_{DS} = 3\text{ V}$ $V_{GS} = 0\text{ V}$	$I_{DSS}$	0	40	70	mA
Pinch-off voltage $V_{DS} = 3\text{ V}$ $I_D = 1\text{ mA}$	$V_{GS(P)}$	-0.7	-0.25	0	V
Gate leakage current $V_{DS} = 3\text{ V}$ $I_D = 15\text{ mA}$	$I_G$	-	-	5	$\mu\text{A}$
Transconductance $V_{DS} = 3\text{ V}$ $I_D = 15\text{ mA}$	$g_m$	70	100	-	mS
Noise figure* $V_{DS} = 3\text{ V}$ $I_D = 10\text{ mA}$ $f = 1.8\text{ GHz}$ $V_{DS} = 3\text{ V}$ $I_D = 15\text{ mA}$ $f = 1.8\text{ GHz}$	$F$	-	0.55 0.53	-	dB
Associated gain* $V_{DS} = 3\text{ V}$ $I_D = 10\text{ mA}$ $f = 1.8\text{ GHz}$ $V_{DS} = 3\text{ V}$ $I_D = 15\text{ mA}$ $f = 1.8\text{ GHz}$	$G_a$	-	15.7 16.2	-	dB
IIP3* $V_{DS} = 3\text{ V}$ $I_D = 10\text{ mA}$ $f = 1.8\text{ GHz}$ $V_{DS} = 3\text{ V}$ $I_D = 15\text{ mA}$ $f = 1.8\text{ GHz}$	$IIP3$	-	6 8.5	-	dBm

\* Parameters are measured at input impedance for minimum noise figure and output impedance for maximum gain.

# CFH 400 Preliminary Datasheet

## Electrical Characteristics, Continued:

### Typical Common Source S – Parameters

@ 3V; 10mA;  $Z_o = 50\Omega$

f[GHz]	S11 Mag	S11 Ang	S21 Mag	S21 Ang	S12 Mag	S12 Ang	S22 Mag	S22 Ang
0.2	0.9818	-6.3	8.2506	174.6	0.0128	110.7	0.7321	-5.3
0.3	0.9947	-11.8	8.3347	170.2	0.0198	91.2	0.7148	-10.4
0.4	0.9826	-17.9	8.166	164.2	0.0288	95	0.7114	-15.5
0.5	0.9696	-23.8	8.1183	159.5	0.041	72	0.6999	-20.6
0.6	0.9525	-30.1	8.0562	154.2	0.0512	71.1	0.6835	-26.1
0.7	0.9312	-36	7.9081	149.9	0.0596	66.2	0.6651	-30.8
0.8	0.9159	-41.8	7.7814	144.7	0.0666	62.8	0.6434	-36
0.9	0.8956	-47.6	7.6295	140	0.0724	58.3	0.6203	-41.1
1	0.8702	-52.9	7.4436	135	0.0799	55.5	0.5925	-46.3
1.1	0.8444	-58.7	7.2593	130.8	0.0889	51.7	0.574	-51.8
1.2	0.8144	-64.8	7.0517	126.4	0.0938	50.1	0.5488	-57.4
1.3	0.7919	-70.7	6.8482	121.8	0.0994	45.4	0.5257	-62.9
1.4	0.7663	-76	6.7195	117.8	0.1056	42.3	0.5006	-68.4
1.5	0.7438	-81.9	6.4735	114	0.1097	40.4	0.477	-73.9
1.6	0.7208	-87	6.2591	109.9	0.1124	37.2	0.4587	-79.1
1.7	0.6956	-92	6.0662	106.2	0.1158	33.9	0.4444	-85
1.8	0.6788	-97.3	5.8346	102.3	0.1195	31.6	0.4217	-90.5
1.9	0.6579	-102.6	5.6395	98.9	0.1225	30.6	0.4055	-95.2
2	0.6396	-107.5	5.4822	95.5	0.1248	27	0.3913	-101.5
2.1	0.6214	-111.8	5.3077	92.2	0.1245	24.7	0.3843	-106.5
2.2	0.6048	-116.9	5.0469	89	0.1274	23.4	0.3738	-111.7
2.3	0.5949	-121	4.8822	86.2	0.1306	21.4	0.3663	-117.1
2.4	0.5831	-125.4	4.7575	83.1	0.1313	19.1	0.3644	-121
2.5	0.5724	-129.4	4.607	80.5	0.1323	18	0.355	-126.8
3	0.5315	-147.8	3.9289	67.4	0.1364	11.5	0.3447	-145.9
3.5	0.5065	-163.5	3.4181	56	0.1396	7	0.3463	-159.9
4	0.4948	-176.1	3.0368	45.5	0.1397	1.6	0.3449	-171.5
4.5	0.4889	171.3	2.7496	35.3	0.1439	-1.8	0.3429	178
5	0.491	159.7	2.5187	25.1	0.1494	-5.7	0.3405	166.8

### Typical Common Source Noise – Parameters

@ 3V; 10mA;  $Z_o = 50\Omega$

f[GHz]	$F_{min}$ [dB]	$G_a$ [dB]	Mag ( $\Gamma_{opt}$ )	Phase( $\Gamma_{opt}$ ) [deg]	$R_n/50$
0.9	0.42	19.9	0.73	13	0.20
1.8	0.55	15.7	0.57	35	0.16
2.4	0.60	13.7	0.45	51	0.17
3.0	0.67	12.7	0.35	72	0.13
4.0	0.70	10.7	0.33	107	0.10

# CFH 400 Preliminary Datasheet

## Electrical Characteristics, Continued:

### Typical Common Source S – Parameters

@ 3V; 15mA;  $Z_o = 50\Omega$


f[GHz]	S11 Mag	S11 Ang	S21 Mag	S21 Ang	S12 Mag	S12 Ang	S22 Mag	S22 Ang
0.2	0.9995	-4.3	9.9975	174.5	0.0168	128.9	0.6751	-6.1
0.3	0.9933	-13.3	10.0492	168.8	0.02	93.3	0.6764	-11.2
0.4	0.9788	-20.1	9.8365	163	0.0259	84.5	0.67	-16.9
0.5	0.9604	-26.7	9.7307	157.4	0.038	71.5	0.6521	-23.4
0.6	0.9348	-33.6	9.6242	151.7	0.047	68.3	0.6349	-28.9
0.7	0.9115	-40.1	9.412	147.2	0.0503	65.5	0.6091	-34.2
0.8	0.8924	-46.6	9.1204	141.8	0.0596	60.5	0.5844	-40.2
0.9	0.8721	-52.6	8.9181	136.5	0.0715	56.7	0.5641	-45.9
1	0.8457	-59	8.569	131.6	0.0769	52.3	0.5325	-51.9
1.1	0.8144	-65.1	8.3702	127.2	0.0817	49.6	0.5124	-57.4
1.2	0.788	-71.2	8.0757	122.3	0.0869	46	0.4814	-62.7
1.3	0.7555	-77.2	7.821	117.9	0.0903	44.2	0.4603	-69.1
1.4	0.7317	-83.5	7.548	114.3	0.0971	41.1	0.4369	-74.5
1.5	0.7136	-89.2	7.2741	110.1	0.1005	37.8	0.4155	-80.9
1.6	0.6862	-94.7	6.9825	106.5	0.1027	37.1	0.3947	-86.4
1.7	0.6595	-100.1	6.69	103	0.1054	34.3	0.3836	-93.2
1.8	0.6437	-105.3	6.4121	98.9	0.108	31.8	0.368	-99
1.9	0.6195	-110.4	6.1979	95.4	0.1108	29.3	0.351	-104.6
2	0.6053	-115.3	5.9347	92.5	0.1135	28.8	0.3428	-110
2.1	0.5946	-120.1	5.7644	89.3	0.1144	26.5	0.334	-116.1
2.2	0.5814	-124.6	5.5403	86	0.1146	24.6	0.3294	-121.3
2.3	0.5675	-129	5.3237	83.2	0.1167	23.6	0.3265	-125.8
2.4	0.5583	-133.5	5.1687	80.5	0.1179	22.6	0.3213	-130.9
2.5	0.5487	-137.4	4.918	78	0.1177	20.9	0.3168	-135.6
3	0.5182	-155.5	4.2195	65.3	0.125	15.1	0.3195	-154.7
3.5	0.4985	-170.8	3.6443	54.2	0.1279	10.8	0.3212	-168.6
4	0.4876	176.6	3.2225	44.4	0.1328	6.9	0.3248	-178.3
4.5	0.4873	165.8	2.9196	34.6	0.1377	3.3	0.3252	171.5
5	0.4795	153.7	2.6297	24.4	0.1436	0.5	0.3221	159.9

### Typical Common Source Noise – Parameters

@ 3V; 15mA;  $Z_o = 50\Omega$

f[GHz]	$F_{min}$ [dB]	$G_a$ [dB]	Mag ( $\Gamma_{opt}$ )	Phase( $\Gamma_{opt}$ ) [deg]	$R_n/50$
0.9	0.40	20.4	0.74	13	0.18
1.8	0.53	16.2	0.57	30	0.15
2.4	0.58	14.3	0.39	52	0.14
3.0	0.63	13.0	0.31	78	0.12
4.0	0.68	11.0	0.29	109	0.10

## Semiconductor Device Outline SOT343

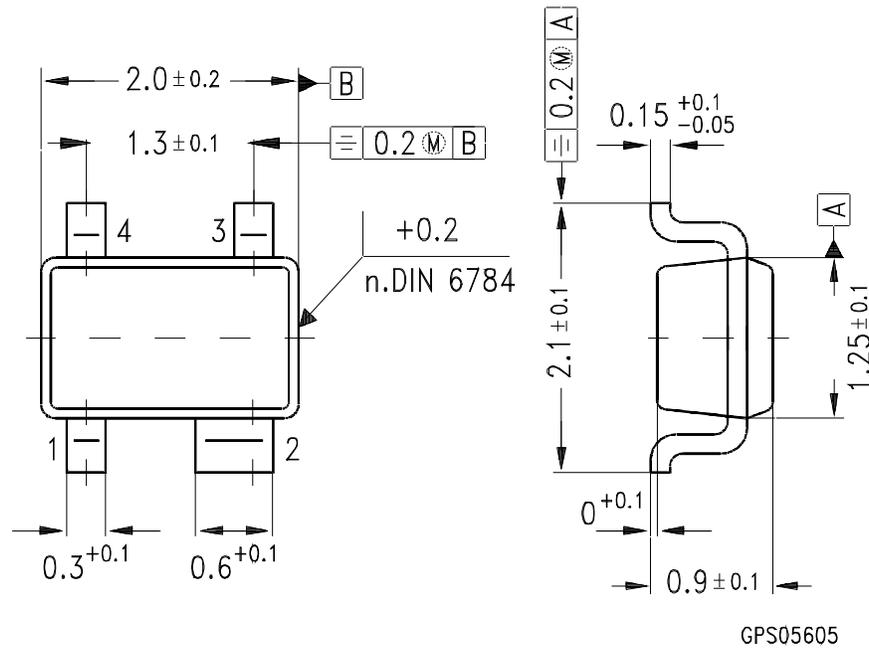

### Pin assignment:

- 1 = gate
- 2 = source
- 3 = drain
- 4 = source

# CFH 400 Preliminary Datasheet

---

## Ordering Information:

Type	Marking	Ordering code (taped)	Package <sup>1</sup>
<b>CFH400</b>	<b>N4s</b>	<b>CFH400</b>	<b>SOT343</b>

**ESD:** Electrostatic discharge sensitive device, observe handling precautions!

---

Published by TriQuint Semiconductor GmbH, Marketing, Konrad-Zuse-Platz 1, D-81829 Munich.

copyright TriQuint Semiconductor GmbH 2003. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, delivery, and prices please contact the Offices of TriQuint Semiconductor in Germany or the TriQuint Semiconductor Companies and Representatives worldwide.

Due to technical requirements components may contain dangerous substances. For information on the type in question please contact your nearest TriQuint Semiconductors Office.

.

---