
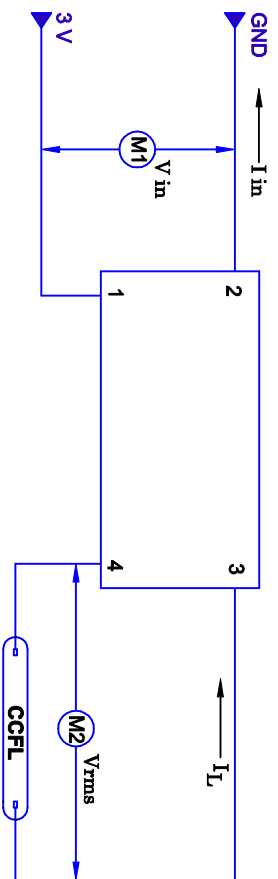
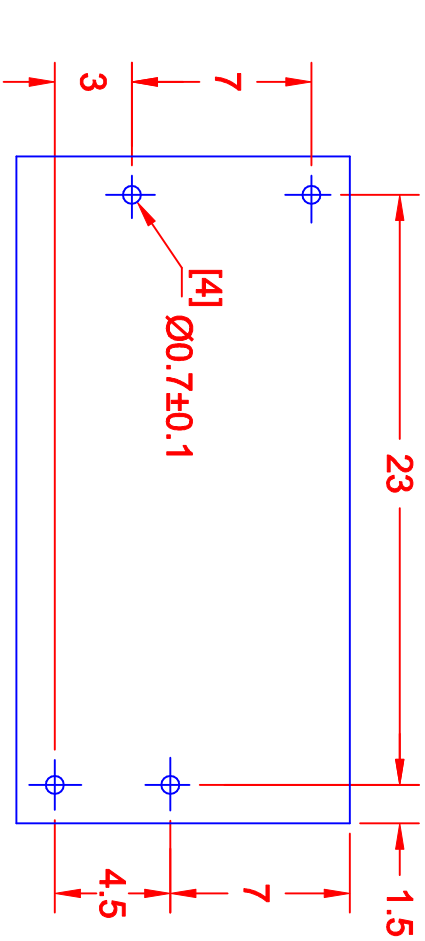


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	8/20/99
A	WIRE DIAGRAM CHNGS	10/31/00
B	CONVERT TO CAD	6/8/01
C	ADD HOLE DIA.	3/15/02

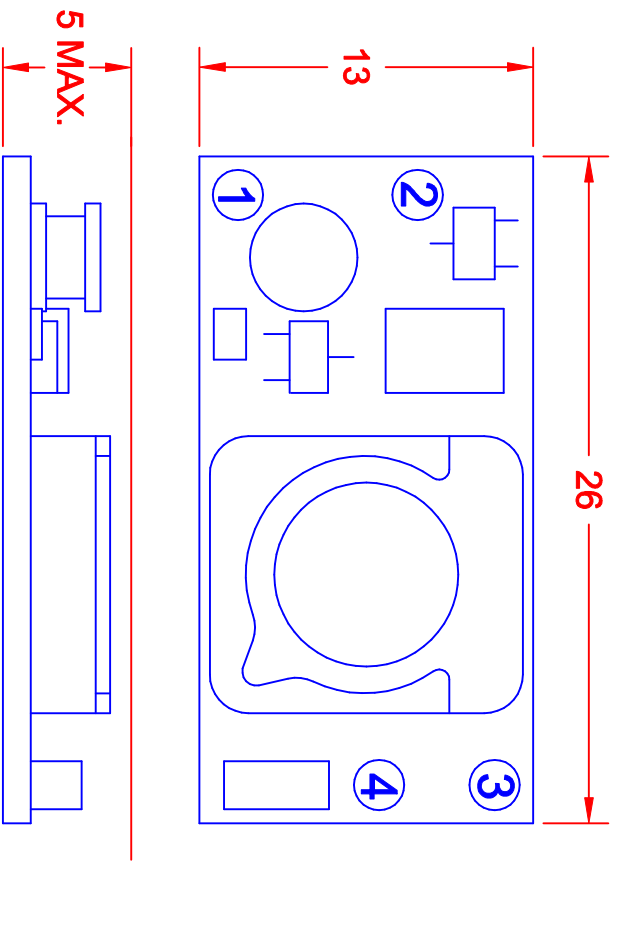

CHARACTERISTICS			
	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	2.5	3.0	3.5
INPUT CURRENT: (mA)	350	400	450
OUTPUT VOLTAGE: (Vrms)	600	650	700
OUTPUT CURRENT (maRms)	4.0	4.5	5.0
OUTPUT FREQUENCY: (KHz)	70	80	90
OPERATING TEMP: (CELSIUS)	0	25	50

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)
3	OUT GND
4	V OUT

TOLERANCE		
L < 20	20 ≤ L < 50	50 ≤ L < 100
±0.2	±0.3	±0.4
100 ≤ L		±0.5

METRIC		DIMENSIONS ARE IN MILLIMETERS	
THIRD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED	
1 PL +/- 0.2		2 PL +/- 0.2	
ANGLE +/- 0		ANGLE +/- 0	
DRAWN BY L. WENGSTROM	DATE 3/15/02	APPR'D BY F.D.	DATE 3/15/02
TITLE JKL COMPONENTS CORPORATION		SIZE A	SCALE NONE
3 V CCFL POWER SUPPLY		FSCH NO. 55335	DRAWING NO. BXA-302
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		RELEASED DATE 8/20/99	REVISION DATE 3/15/02
		REV. NO. C	SHEET OF