


*Testers with the leading
edge in safety*

C.A 760
C.A 704
C.A 751

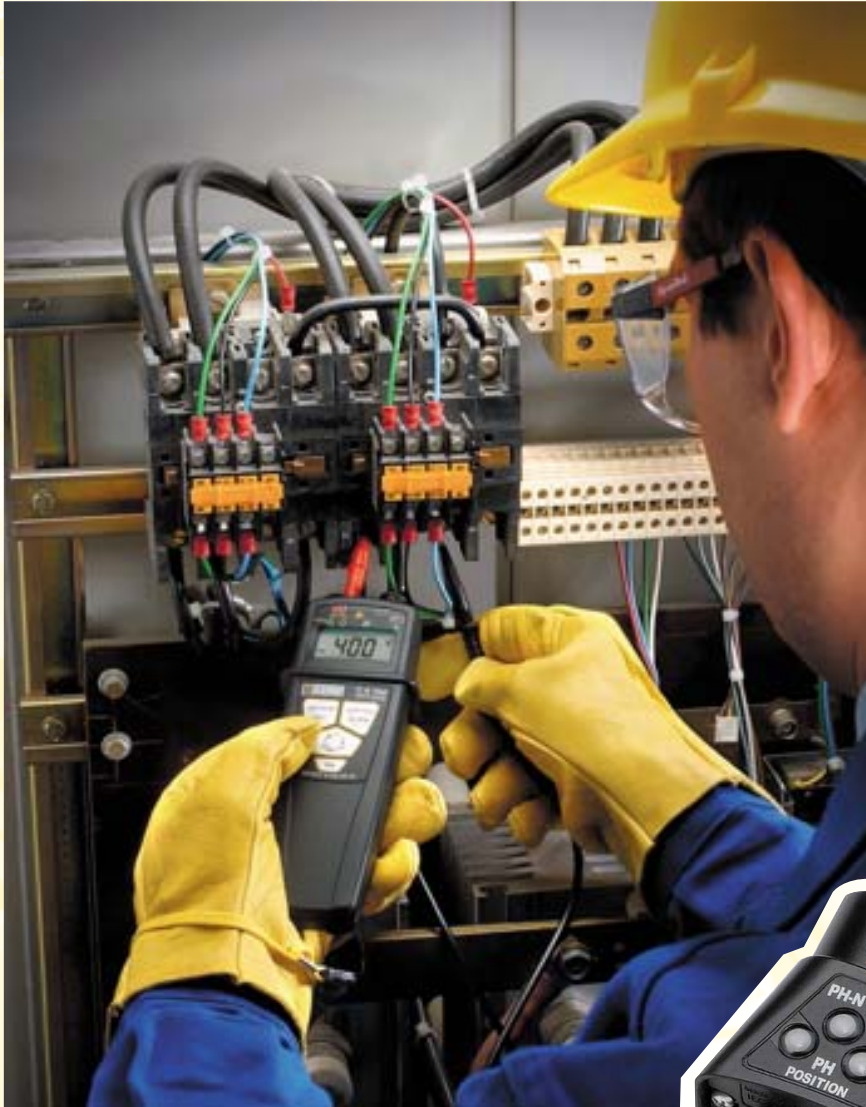

- Sturdy instruments: resistant if dropped from up to 2 m, guaranteed 2 years
- Guarantee maximum safety: 600 V Cat.III and 61243-3
- Respect the British Electricity at Work Regulations, 1989
- Outside use (IP65)
- Excellent quality / price ratio

The **C.A 751 - C.A 760 - C.A 704** safety testers are simple and sturdy instruments that correspond to the everyday needs of the electrician. They are adapted for all kinds of measurement situations: terminal switchboards or socket outlets. Easy to use while wearing gloves, their sharpness and user-friendliness make handling simple and sure.

**The Safety Multimeter
C.A 704**



- ▷ 2000-count digital display with backlighting and HOLD function
- ▷ Resistance measurements up to 2 kΩ
- ▷ Automatic range

- ▷ All automatic
- ▷ Audible continuity test
- ▷ Auto AC/DC, automatic ranges, automatic on and off

**The Safety Voltage Tester
C.A 760**



- ▷ 8 LEDs from 12 V to 690 V AC and 750 V DC
- ▷ Circuit breaker trigger test

**The 2P+E Socket Tester
C.A 751**



- ▷ Ground conductor and phase position connection, etc.
- ▷ Reversible, self-powered
- ▷ Adapts to the C.A 704 and C.A 760
- ▷ Can be used alone or with a multimeter on European format sockets

The **C.A 751 socket tester** fits perfectly to either the C.A 704 or the C.A 760 in order to make easy, yet complete safety European format socket tests. This socket tester can be used on sockets having the earth plug either on top or on the bottom.



Self-powered, it can also be used alone to check socket connections and phase positions.

The C.A 751 marries ideally with a multimeter with D4 keys: the 2P+E adapter terminals are made for test probes with a diameter of 4 mm.




TESTERS FOR MAINTENANCE AS WELL AS INSPECTION TESTING BY SEPARATION

- Technically advanced and safe, the C.A 704 and C.A 760 operate in conformity with the IEC 61243-3 European standards for safety testers.
- Conceived to conform to the British Electricity at Work Regulations 1989, they also comply with the EN 61010-1 standard installation category III, for an assigned voltage of 600 V.

ALL MEASUREMENTS VERY SIMPLE

on 2P+E sockets or terminal strips

- AC and / or DC voltage
- Audible and visual continuity test
- Direction of phase rotation
- Phase position



In voltage measurement, standard D2 test probes reach to the back of terminal strips.



Used together, the C.A 751 + the C.A 704 or the C.A 760 tester make quick and effective standard socket tests (phase position, connections and voltage).



Used together, the C.A 751 + C.A 760 create a resistive phase-earth link for safely testing a 30 mA circuit breaker at 230 V AC.



With each of the testers, just one hand is needed to easily detect the phase. For the C.A 704, voltage can be measured at the same time.



Phase rotation direction is defined by a TT, TN, or IT neutral system due to an innovative 2-wire method. This test operates on generator sets.

With the test probes attached to the casing, their 19 mm center distance corresponds to the pole pitch of circuit breakers.



DIAGNOSIS FOR ELECTRICAL SOCKET CABLING



Here, the wiring is correct: the central neon and one of the two bottom neons (phase position) light up.



Another result: there is a problem in the socket's wiring.

Ex.: here, all the neons light up: thus an earth fault.

TECHNICAL SPECIFICATIONS C.A 751

Voltage: 230 V network / **frequency:** 50/60 Hz
Installation neutral system: TT and TN
 Does not trigger the circuit breaker.
European standard and Electrical safety:
 IEC 61243-3 in association with a C.A 704 or a C.A 760, EN 61010-1 category II, assigned voltage 230 V
Electromagnetic compatibility EN 61326-1/A2 criterion B
Protection rating of enclosure according to EN 61010-1: IP 20
Operating use: -10 °C to +55 °C for 96 % RH
Self-powered by the measurement
Dimensions: 95 x 50 x 38 mm / **mass:** 60 g


- Auto-test for the instrument and leads.
- High protection rating (IP65) for the casing and battery compartment.
- Ergonomic casing for use with gloves and over-gloves.
- Operating current of the instrument always inferior to the physical threshold of 3.5 mA, even when at maximum voltage, making it possible to use extending non-IP2X test probes (according to IEC 61243-3).

TECHNICAL SPECIFICATIONS

	C.A 704	C.A 760
Voltage detection		
• Voltage:	2 / 20 / 200 / 690 V AC, basic accur. 3 % 200 mV / 2 / 20 / 200 / 750 V DC, basic accur. 2 %	10 V ≤ U ≤ 690 V AC 10 V ≤ U ≤ 690 V DC
• Frequency:	DC and 50-60 Hz at 400 Hz	
• Impedance:	High-circuit breakers do not trigger	
• Peak current at 690 V:	I _s < 3,5 mA	
Locating phase / neutral		
	above 127 V (50/60 Hz)	
Polarity indication	Yes	Yes
Continuity (with buzzer)		
• Trigger threshold:	± 600 Ω	± 13 kΩ
• Protection:	600 V RMS	600 V RMS
Resistance (C.A 704)	0.001 kΩ to 1.999 kΩ ± 5 %	
Phase rotation (2 wires)		
• Voltage (Ph/Ph):	360 V < U < 690 V	
• Frequency:	50/60 Hz	50/60 Hz
Differential circuit breaker trigger 30 mA	No	Yes
Buzzer (2 kHz)		
• Intermittent beep for the Ph/N identification test	No	Yes
• Continuous beep for voltage test	No	≥ 50 V
• Continuous beep for auto-test, continuity	Yes	Yes
European standard and Electrical safety		
	IEC 61243-3 relative to DDT – VAT (Voltage Detector, Voltage Absence Tester) EN 61010-1 Installation Category: III, assigned voltage 600 V	
Electromagnetic compatibility	EN 61326-1/A2 criterion B	
Protection rating of enclosure according to EN 61010-1	Casing: IP 65	
Environmental conditions	Operating use: -10 °C at +55 °C for 96 % RH	
Power supply	1 x 9 V battery, 6F22 or 6LF22 (6F22 supplied)	
Battery life		
With an alkaline battery:	5000	2600
With a regular battery:	2500	1300
Dimensions / Mass:	163 x 63.6 x 40 mm / 210 g	

On the back side of the **C.A 704** and **C.A 760** is a clever clip system for the test probes when disconnected.

This system makes storing the instrument in a tool box or pocket simple. The wrist strap slips easily around the wrist to prevent dropping.



The user is informed when the touch keys on the C.A 704 and C.A 760 are activated by a “click” sound.

Measurements made easy, even while wearing gloves!

Its detachable protective tip makes it possible to limit the contact area of the test probes.



TO ORDER

• Safety Voltage tester C.A 760	P01.1917.31Z
• Safety Multimeter C.A 704	P01.1917.32Z
Delivered in blister with battery, measurement leads and wrist strap	
• Socket tester C.A 751	P01.1019.97Z
Delivered in blister, operates without battery	

ACCESSORIES

• Carrying cases (180 x 75 x 45 mm)	P01.2980.12
(200 x 100 x 40 mm)	P01.2980.65Z
• Black lead with test probe Ø 2 mm	P01.1020.09
• Red test probe 2 mm	P01.1020.08
• 9 V alkaline battery	P01.1007.59
• IP2X accessory kit: set of D4 test probe leads	P01.2952.37Z
• Tester accessory kit: C.A 751 + test probe + lamp	P01.1019.98Z

YOUR DISTRIBUTOR

FRANCE
Chauvin Arnoux
190, rue Championnet
75876 PARIS Cedex 18
Tel: +33 1 44 85 44 86
Fax: +33 1 46 27 95 59
export@chauvin-arnoux.fr
www.chauvin-arnoux.fr

UNITED KINGDOM
Chauvin Arnoux Ltd
Waldeck House - Waldeck Road
MAIDENHEAD SL6 8BR
tel.: +44 1628 788 888
fax: +44 1628 628 099
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.co.uk

MIDDLE-ORIENT
Chauvin Arnoux Middle East
P.O. BOX 60-154
1241 2020 JAL EL DIB (Beirut)
Tel: +961 1 890 425
Fax: +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

 **CHAUVIN
ARNOUX**
GROUP