


# Fast-Acting $1\frac{3}{32}$ " x $1\frac{1}{2}$ " (10x38mm) Midget Fuses


## 250Vac, $\frac{2}{10}$ -30A

### BAF Series

Dimensions - in (mm)

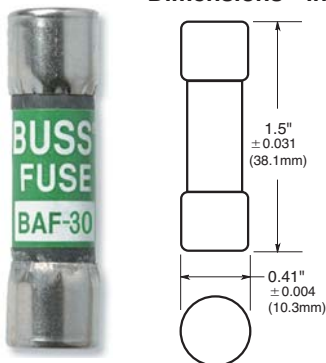

Time-Current Characteristic Curves—Average Melt

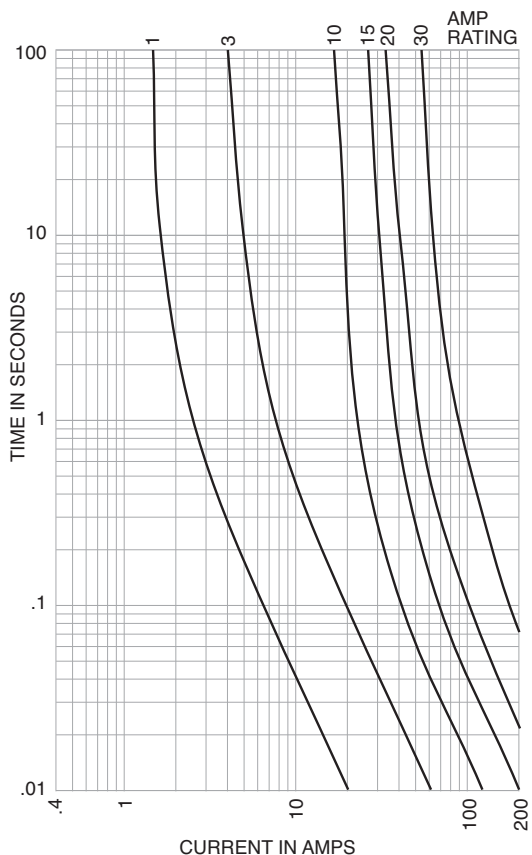

Catalog Symbol: BAF

Fast-Acting

$\frac{2}{10}$  to 30

UL Recognized, STD. 248-14

250Vac ( $\frac{2}{10}$ -15A)

(GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED

250Vac ( $\frac{2}{10}$ -15A)

(CLASS 1422-01, FILE # 53787)


CE

- Fiber tube.
- Nickel-plated brass endcaps.

Part Number	Interrupting Rating (amps)		Direct Current Ratings	
	250Vac	125Vac	Vdc	IR (amps)
BAF- $\frac{2}{10}$	35	10,000	-	-
BAF- $\frac{3}{10}$	35	10,000	-	-
BAF- $\frac{1}{2}$	35	10,000	-	-
BAF- $\frac{3}{4}$	35	10,000	-	-
BAF-1	35	10,000	-	-
BAF-1 $\frac{1}{2}$	100	10,000	-	-
BAF-1 $\frac{3}{4}$	100	10,000	-	-
BAF-2	100	10,000	-	-
BAF-2 $\frac{1}{2}$	100	10,000	-	-
BAF-3	100	10,000	150	10,000
BAF-4	200	10,000	150	10,000
BAF-5	200	10,000	150	10,000
BAF-6	200	10,000	150	10,000
BAF-6 $\frac{3}{4}$	200	10,000	12	10,000
BAF-7	200	10,000	12	10,000
BAF-8	200	10,000	12	10,000
BAF-9	200	10,000	12	10,000
BAF-10	200	10,000	12	10,000
BAF-12	750	10,000	12	10,000
BAF-15	750	10,000	12	10,000
BAF-20	200	10,000	-	-
BAF-25	200	10,000	-	-
BAF-30	200	10,000	-	-

Carton Quantity and Weight

Amp Ratings	Carton Qty	Weight Lbs.	Kg.
$\frac{2}{10}$ -30	100	1.3	0.590



**Recommended fuse blocks/fuse holders**  
**See Data Sheets listed below**

- Open fuse blocks - 1104, 2104
- Finger-safe fuse holders - 1109, 1102, 1103, 2053
- Panel-mount fuse holders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuse holders - 2127, 2126

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.