

# US-Lasers: 650nm-5mW - Red Laser Diode and Red Diode Laser Module

**Links to Laser Diode & Laser Module Configurations and Specifications**  
 >>>>>>>>>>

[Laser Diodes](#)

[Laser Diode Module](#)

[Micro Laser Module](#)

[Variable Output Laser Diode Module](#)

[D650-5](#)

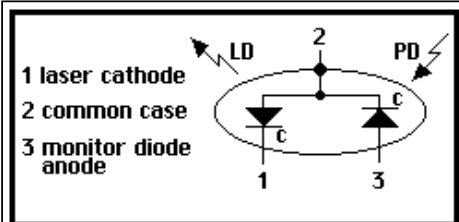
[M650-5](#)

[MM650-5](#)

## DATA SHEETS .... MM650nm 5mW ....RED LASER MODULE & DIODE

<b>Barrel Specs:</b> <ul style="list-style-type: none"> <li>2 Pieces</li> <li>12 - 56 Thread Size</li> <li>Dia: 6.4mm</li> <li>Length: 17mm</li> </ul>	<b>Weight &amp; Wire Lengths:</b> <ul style="list-style-type: none"> <li>Module with 6" wire leads - 49 grain wt.b</li> <li>Module without 6" wire leads - 42 grain wt</li> <li>Module with spring leads - 42 1/2 grain wt.</li> <li>Spring 2.4mm dia. 4mm long (trimmable)</li> </ul>	<b>Lens Housing Specs:</b> <ul style="list-style-type: none"> <li>12 - 56 Thread Size</li> <li>3.0mm Aperture</li> <li>4.0mm Plastic Lens</li> </ul>
--	--	--

### RED LASER DIODE ABSOLUTE MAXIMUM RATINGS - (Tc=25 °C)

<b>TECHNICAL DATA</b> Visible laser diode light output                      650nm Optical power output    5mW CW Package Type    5.6mm Built-in photo diode for monitoring laser output	 <p><b>Pin Out Diagram - Style A</b></p>
---	---

Items	Symbols	Values	Unit
Optical output power	Po	5	mW
Laser diode reverse voltage	V	2	V
Photo diode reverse voltage	V	30	V
Operating temperature	Topr	-10 ~ +60	°C
Storage temperature	Tstg	-40 ~ +85	°C

### OPTICAL and ELECTRICAL CHARACTERISTICS - (Tc=25 °C)

Items	Symbols	Min.	Typ.	Max.	Unit	Test Condition
Optical output power	Po	-	5	-	mW	-
Threshold current	Ith	-	20	70	mA	-
Operating current	Iop	-	65	85	mA	Po=5mW
Operating voltage	Vop	-	2.7		V	Po=5mW
Lasing wavelength		640	650	660	nm	Po=5mW
Beam divergence		-	5	11	deg	Po=5mW
Beam divergence		-	25	37	deg	Po=5mW
Monitor current	Im	-	10	20	uA	Po=5mW
Astigmatism	As	-	11	-	um	Po=5mW
MTTF			3-5,000 hrs.			Po=5mW
Emitter Size	10 x 60 Microns - Emitter Distance to Cap Lens = 0.3mm					
Structure	Index Guided					