


BYT 30PI- 400

FAST RECOVERY RECTIFIER DIODES

- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING
- INSULATED: Capacitance 15pF



SUITABLE APPLICATIONS

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
I _{FRM}	Repetive Peak Forward Current	$t_p \le 10 \mu s$	500	Α
I _{F (RMS)}	RMS Forward Current	ent $T_c = 60^{\circ}C$		Α
I _{F (AV)}	Average Forward Current $ \begin{array}{c} T_c = 60^{\circ}C \\ \delta = 0.5 \end{array} $		30	Α
I _{FSM}	Surge non Repetitive Forward Current	t _p = 10ms Sinusoidal	350	Α
Р	Power Dissipation	T _c = 60°C	50	W
T _{stg} T _j	Storage and Junction Temperature Range			°C

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	400	V
V_{RSM}	Non Repetitive Peak Reverse Voltage	440	V

THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
R _{th (j - c)}	Junction-case	1.8	°C/W

October 1999 Ed: 1A 1/5

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

Synbol	Tes	Min.	Тур.	Max.	Unit	
I_R	T _j = 25°C	$V_R = V_{RRM}$			35	μΑ
	T _j = 100°C				6	mA
V_{F}	T _j = 25°C	I _F = 30A			1.5	V
	T _j = 100°C				1.4	

RECOVERY CHARACTERISTICS

Symbo	I	Test Conditions				Тур.	Max.	Unit
t _{rr}	T _j = 25°C	I _F = 1A	$di_F/dt = -15A/\mu s$	$V_R = 30V$			100	ns
		I _F = 0.5A	I _R = 1A	$I_{rr} = 0.25A$			50	

TURN-OFF SWITCHING CHARACTERISTICS (Without Series Inductance)

Symbol	Test Conditions			Тур.	Max.	Unit
t _{IRM}	$di_F/dt = -120A/\mu s$	V _{CC} = 200 V I _F = 30A			75	ns
	di _F /dt = - 240A/μs	$L_p \le 0.05 \mu H$ $T_j = 100^{\circ} C$ See figure 11		50		
I _{RM}	di _F /dt = -120A/μs				9	Α
	di _F /dt = - 240A/μs			12		

TURN-OFF OVERVOLTAGE COEFFICIENT (With Series Inductance)

Symbol	Test Conditions			Min.	Тур.	Max.	Unit	
$C = \frac{V_{RP}}{V_{CC}}$	$T_j = 100^{\circ}C$ $di_F/dt = -30A/\mu s$	$V_{CC} = 60V$ $L_p = 1\mu H$	$I_F = I_{F (AV)}$ See figure 12	See note		3.3		

To evaluate the conduction losses use the following equations:

 $V_F = 1.1 + 0.0095 I_F$ $P = 1.1 \times I_{F(AV)} + 0.0095 I_F^2(RMS)$

Figure 1. Low frequency power losses versus average current





Figure 2. Peak current versus form factor



2/5

Figure 3. Non repetitive peak surge current versus overload duration




Figure 4. Thermal impedance versus pulse width




Figure 5. Voltage drop versus forward current




Figure 6. Recovery charge versus di_F/d_{t-}




Figure 7. Recovery time versus di_F/d_{t-}





Figure 8. Peak reverse current versus di_F/d_{t-}



577

Figure 9. Peak forward voltage versus dir/dt-




Figure 10. Dynamic parameters versus junction temperature.




Figure 11. Turn-off switching characteristics (without series inductance).


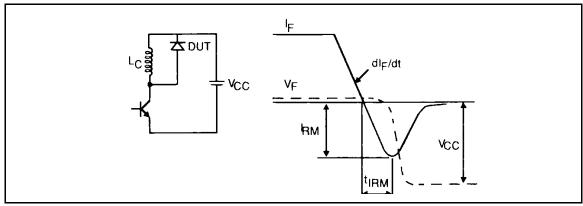



Figure 12. Turn-off switching characteristics (with series inductance)

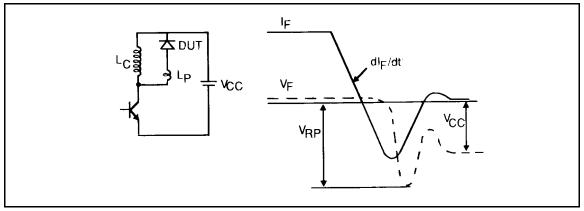

4/5

PACKAGE MECHANICAL DATA:

Isolated DOP3I Plastic

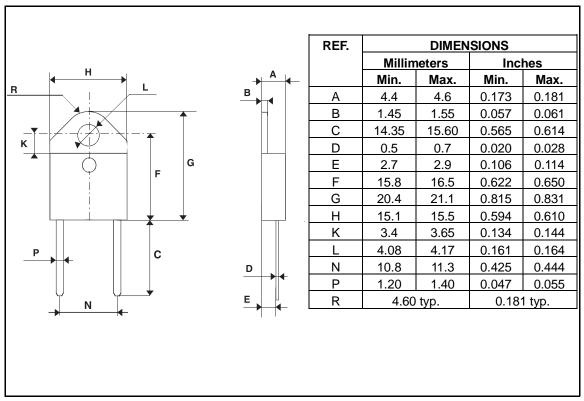

■ Marking: type number

■ Cooling method: by conduction (method C)

■ Weight: 4.52g

Recommended torque value: 80cm. NMaximum torque value: 100cm. N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics © 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com

