


## Avalanche Diode

$V_{RRM} = 1200-1800\text{ V}$

$I_{F(RMS)} = 18\text{ A}$

$I_{FAVM} = 11\text{ A}$

$V_{RSM}$	$V_{(BR)min}$	$V_{RRM}$	Type
V	V	V	
1300	1300	1200	DSA 9-12F
1700	1750	1600	DSA 9-16F
1900	1950	1800	DSA 9-18F



DO-203 AA



A = Anode, C = Cathode



Symbol	Conditions	Maximum Ratings		
		typ.	max.	
$I_{FRMS}$	$T_{VJ} = T_{VJM}$	18	A	
$I_{FAVM}$	$T_C = 150^\circ\text{C}; 180^\circ \text{ sine}$	11	A	
$P_{RSM}$	$T_{VJM}, t_p = 10\text{ ms}$	4.5	kW	
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}; t = 10\text{ ms}$ (50 Hz), sine $t = 8.3\text{ ms}$ (60 Hz), sine	250 265	A	
	$T_{VJ} = 150^\circ\text{C}; t = 10\text{ ms}$ (50 Hz), sine $t = 8.3\text{ ms}$ (60 Hz), sine	200 220	A	
$I^2t$	$T_{VJ} = 45^\circ\text{C}; t = 10\text{ ms}$ (50 Hz), sine $t = 8.3\text{ ms}$ (60 Hz), sine	310 295	$\text{A}^2\text{s}$	
	$T_{VJ} = 150^\circ\text{C}; t = 10\text{ ms}$ (50 Hz), sine $t = 8.3\text{ ms}$ (60 Hz), sine	200 190	$\text{A}^2\text{s}$	
$T_{VJ}$		-40...+180	$^\circ\text{C}$	
$T_{VJM}$		180	$^\circ\text{C}$	
$T_{stg}$		-40...+180	$^\circ\text{C}$	
$M_d$	mounting torque	2.2...2.8	Nm	
<b>Weight</b>	typical	5	g	

Symbol	Conditions	Characteristic Values		
		typ.	max.	
$I_R$	$V_R = V_{RRM}$	3	mA	
$V_F$	$I_F = 36\text{ A}$	1.4	V	
$V_{TO}$	For power-loss calculations only	0.85	V	
$r_T$	$T_{VJ} = T_{VJM}$	15	$\text{m}\Omega$	
$R_{thJC}$	DC current 180° sine	2 2.17	K/W	
$R_{thJH}$	DC current	3.0	K/W	
$d_s$	Creepage distance on surface	2.0	mm	
$d_A$	Strike distance through air	2.0	mm	
$a$	Max. allowable acceleration	100	$\text{m}/\text{s}^2$	







Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions.

© 2011 IXYS All rights reserved

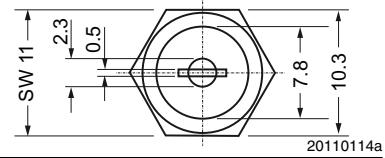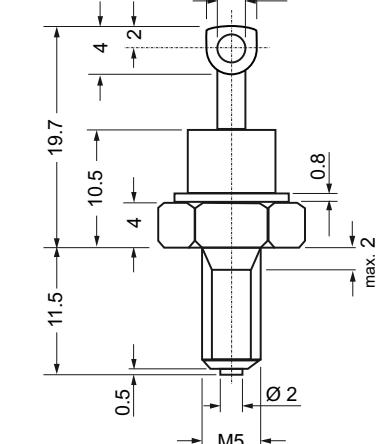

1 - 2

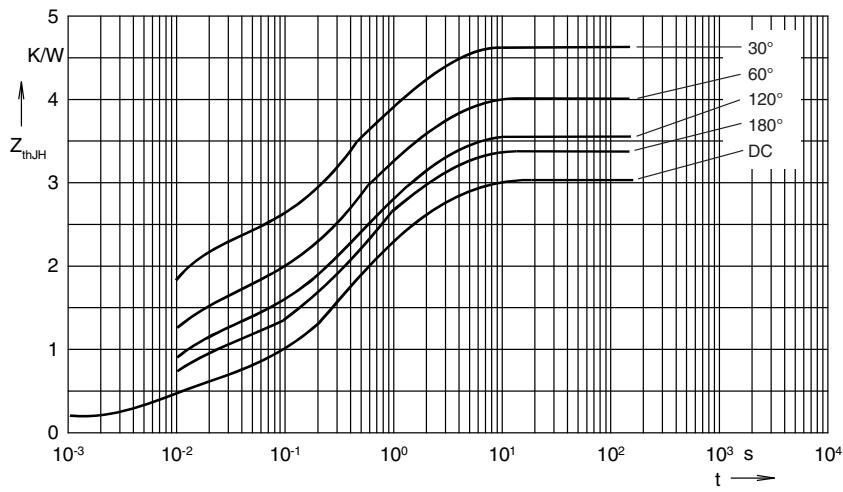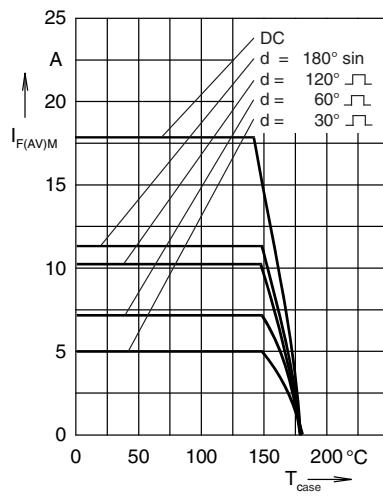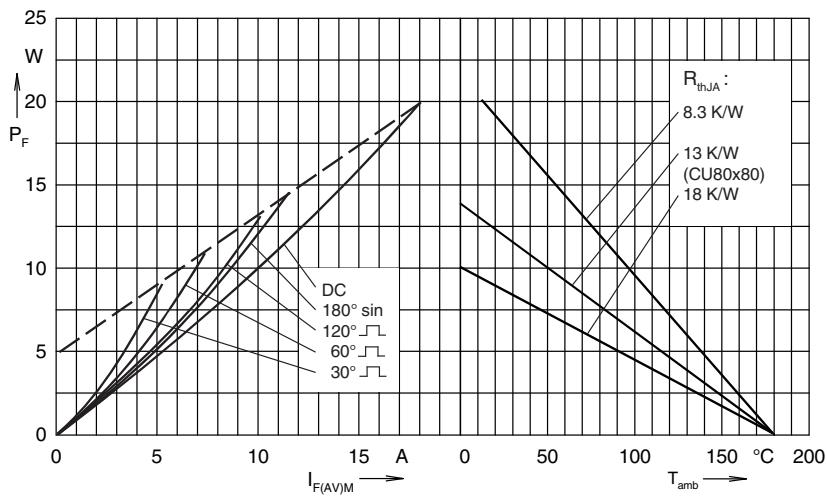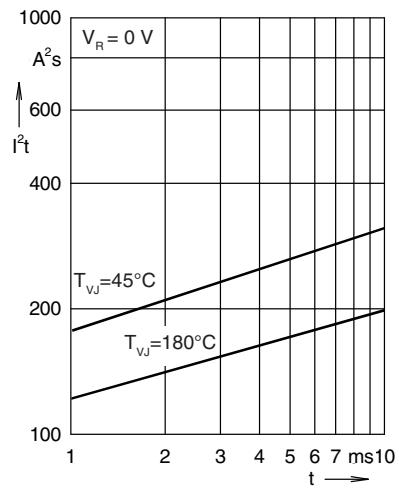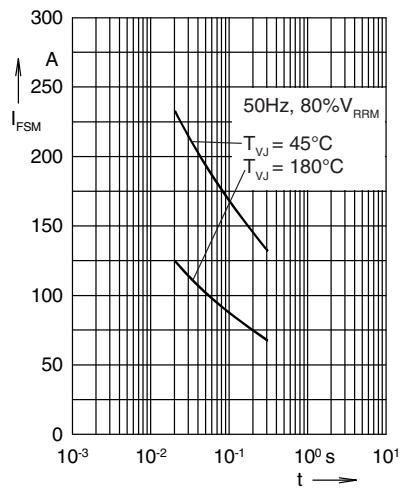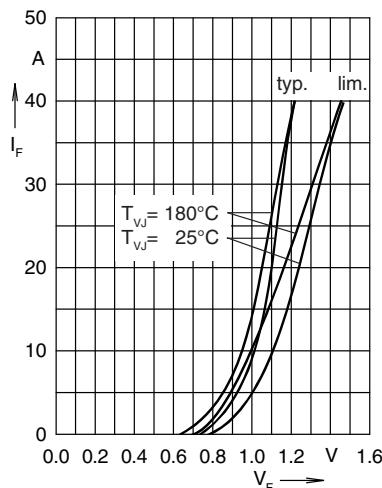

R<sub>thJH</sub> for various conduction angles d:

d	R <sub>thJH</sub> (K/W)
DC	3.0
180°	3.35
120°	3.56
60°	4.0
30°	4.64

Constants for Z<sub>thJH</sub> calculation:

i	R <sub>thi</sub> (K/W)	t <sub>i</sub> (s)
1	0.095	0.00032
2	0.515	0.0102
3	1.39	0.360
4	1.0	2.30