

# SLA560WB \*\*\* Series

Emitting Color	White							
Material	InGaN on SiC							
Emitting Surface Dimension(mm)								
¢ 5.0								
Part No.	SLA560WBC7T							

Note) "-" will be taken out for emitting color B/E series.


#### ■Absolute Maximum Ratings (Ta=25°C)

Part No.	Emitting color	Power dissipation Po (mW)	Forward current IF (mA)	Peak forward current IFP (mA)	Reverse voltage VR (V)		Storage temperature T₅tg (℃)
SLA560WBC	7T White	105	25		5	-20 to +80	-30 to +100

#### Electrical Optical Characteristics (Ta=25°C)


Part No.	Resin	Forward voltage Vr		Reverse current IR		Chromaticity coordinates			Brightness Iv		
		Тур. (V)	lF (mA)	Мах. (µА)	Vr (V)	x	у	lF (mA)	Min. (mcd)	Typ. (mcd)	lF (mA)
SLA560WBC7T	Phosphor included	3.2	20	100	5	0.31	0.31	20	470	1000	20

#### Chromaticity Diagram




#### 0.283 0.244 0.280 0.312 0.330 0.30 0.354 0.299 0.269 0.330 0.370 0.280 0.330 0.307 0.363 0.398 0.260 0.29


#### Recommended Pad Layout




#### Packaging Specifications (Unit:mm)




### Dimensions (Unit:mm)



#### Directivity (Typ.)



Note) The design and specifications are subject to change without prior notice. Before ordering or using, please check the latest technical specifications.

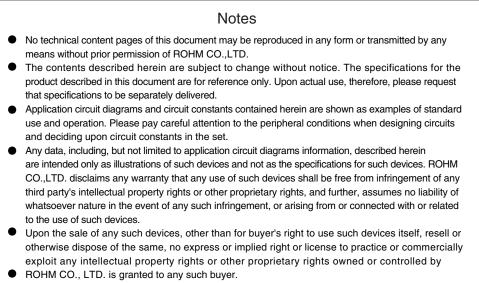

• Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact your nearest sales office.

## **ROHM** Customer Support System

THE AMERICAS / EUPOPE / ASIA / JAPAN

#### www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2007 ROHM CO., LTD. ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan TEL:+81-75-311-2121 FAX:+81-75-315-0172

ROHM

Appendix1-Rev2.0