

Safety Non Contact Switch

Based on Magnetic Coded Technology

FF-SNC Series



FEATURES

- Meets applicable parts of European EN 1088 standard for Interlocking devices associated with guards
- Permanent self-checking electronic designed in compliance with the requirements of the EN 954-1 standard for **Category 3 protective Devices**
- Operating range:
5 mm - 7 mm / 0.20 in - 0.27 in ON,
8 mm - 12 mm / 0.32 in - 0.47 in OFF
- High resistance to environmental influences
- ABS and Stainless Steel housings sensors available
- Sensors sealing: IP 67
- Prewired or M8 plug termination
- Supply voltage: 24 Vdc/Vac ±15 %;
110 Vac ±15 % (only available for the 4-sensor control unit)
- Response time of the control unit:
15 ms
- Manual or automatic restart
- LED status indicator
- 2-sensor control unit: (DIN rail mount
22,5 mm / 0.89 in width)
4-sensor control unit: (DIN rail mount
75 mm / 2.95 in width)
5-sensor extension module: (DIN rail
mount 22,5 / 0.89 in width)

TYPICAL APPLICATIONS

- Interlocking guard for non locked mechanical screens offering free access (machines must achieve instant stop):
- Machine door or casting "open/closed" detection
 - Guard-in-place detection, gate/access door detection
 - Control of mechanical screens used in addition to a safety light curtain
 - Food & Beverage, Packaging, Machine Tool, Automotive and Textile.



*New: M8 plug model now available

The FF-SNC Honeywell safety non contact switch is a tamper resistant safety system for monitoring machine guards. The actuator being a passive component, the safety switch is the only component that needs to be wired to the control unit and cannot be defeated by regular magnet.

Each system is made up of one or several safety switches, actuators and a control unit. The Honeywell FF-SNC safety non contact switches are designed in compliance with the requirements of the EN 954-1 European Standard for Category 3 Protective Devices.

The FF-SNC is especially suited for applications where perfect door alignment can not be obtained. The FF-SNC Series can be mounted on sliding, hinged or removable machine guards. The output of the control unit is triggered as soon as the distance between the safety switch and the actuator is greater or equal to 8 mm / 0.32 in. This switching distance compensates for the machine vibration or any issue with the installation alignment.

The sensor and actuator small size makes it usable under tight space requirements.

The safety switches and the actuators provide excellent chemical and mechanical resistance. Stainless steel housing versions fulfill the requirements of the Food and Beverage industry.

The FF-SNC400 safety control unit comes in a 75 mm / 2.95 in package and can monitor up to 4 sensors.

The FF-SNC200R2 safety control unit with its 22,5 mm / 0.89 in width will easily find a place in the electrical cabinet and can monitor 2 sensors. Both control units can be placed up to 100 m / 328 ft away from the safety non contact switches. The indicators located on the front cover of both control units provide individual door status information.

The FF-SNC1EXT extension module can be added to the FF-SNC400 or FF-SNC200 control unit and allows the connection of 5 additional sensors.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalogue) is for reference only. DO NOT USE this document as system installation information.
- Complete installation, operation and maintenance information is to be referenced for each product.

Failure to comply with these instructions could result in death or serious injury.

Safety Non Contact Switch FF-SNC


- Complies with the requirements of the EN 954-1 for Category 3 equipment
- Meets applicable parts of ANSI/RIA/OSHA regulations



Dimensions in millimeters / inches, meters / feet, weights in kg / lbs


Features	
Switch	
Material	ABS (FF-SNC1SA□□PA-□) or Stainless Steel 316 and Resin filled (FF-SNC1SA□□PS)
Sensing range	5 mm - 7 mm / 0.20 in - 0.27 in ON • 8 mm - 12 mm / 0.32 in - 0.47 in OFF allowable misalignment: ±4mm / ±1/16 in
Minimum gap	1 mm
Standard cable length	Prewired 3 m / 9.84 ft or 5 m / 16.4 ft (ABS only) - M8 plug: 5 mm / 16.4 ft (ABS only)
Temperature	Operating: -10 °C to +55 °C / 14 °F to 131 °F • Storage: -20 °C to +60 °C / -4 °F to 140 °F
Connection to the control unit	Max. cable length: 100 m / 328 ft
Sealing	IP 67 prewired or M8 plug
Fixing	2 x (M4 x 20 mm) Tamper proof screws (supplied with the product)
Control unit / extension module	
Category	Category 3 according to EN 954-1
Supply voltage	24 Vdc/Vac ±15 % • 110 Vac ±15 % (FF-SNC400RE only)
Response time of the control unit	15 ms (with or without extension module)
Power consumption (including sensors)	6 VA (with or without ext. module): FF-SNC400 • 3 VA (with or without ext. module) : FF-SNC200
Temperature	Operating: -10 °C to +55 °C / 14 °F to 131 °F • Storage: -20 °C to 60 °C / -4 °F to 140 °F
Output	2 NO + 1 NC relay contact
Output Contact Rating	Max.: 4 A / 230 Vac; 2 A / 24 Vdc (Res.) @Cos = 1 • Min.: 10 V / 10 mA
Restart	Manual or automatic
Sealing	IP 40 Housing, Terminals IP 20
Mounting	35 mm / 1.37 in DIN rail
LED indicators	FF-SNC200R2 control unit: Power, Run and 2 guard status indicators FF-SNC400RE control unit: 4 guard status indicators and deselect indicators
Material	Polycarbonate, red

■ Dimensions (mm/in)

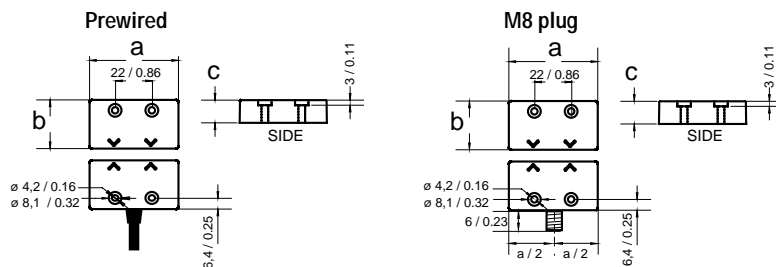

	a	b	c
ABS	52 / 2.04	28 / 1.10	14 / 0.55
SS316	53 / 2.8	29 / 1.14	13.5 / 0.53

M4 x 20 mm Torx screws are supplied with the switches.

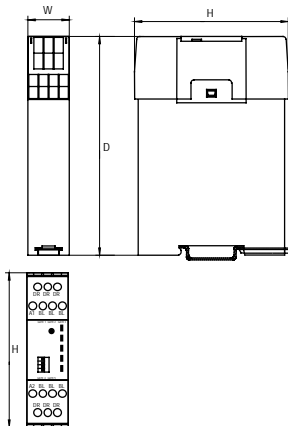

	FF-SNC200R2	FF-SNC1EXT	FF-SNC400R2	FF-SNC400RE
W	22,5 / 0.88	75 / 2.95		
H	84 / 3.30	74 / 2.91		
D	119 / 4.68	119 / 4.68		

(mm/in)

■ Safety Distance Calculations per EN 294 European standard

The dimensions of openings correspond to the narrowest dimension of a slot opening (for openings greater than 120 mm / 4.72 in, refer to the EN 294 standard).

Safety distances s_r for regular openings for persons of 14 years of age and above:

Part of body	Illustration	Opening size	Safety distance s_r
			Slot
Fingertip		$e \leq 4$	≥ 2
		$4 < e \leq 6$	≥ 10
Finger up to knuckle joint Or hand		$6 < e \leq 8$	≥ 20
		$8 < e \leq 10$	≥ 80
		$10 < e \leq 12$	≥ 100
		$12 < e \leq 20$	≥ 120
		$20 < e \leq 30$	$\geq 850^*$
Arm up to junction with shoulder		$30 < e \leq 40$	≥ 850
		$40 < e \leq 120$	≥ 850

*If the length of the slot opening is ≤ 65 mm / 2.56 in, the thumb will act as a stop and the safety distance can be reduced to 200 mm / 7.88 in).

For more information on the guards installation, refer to the European standards: EN 811, EN 953, EN 294

■ Safety Distance Calculations per US ANSI / OSHA standard

$$D_s = K(T_s + T_c + T_r) + D_{pf}$$

With:

D_s = minimum safe distance between safeguarding device and hazard

K = speed constant: 1,6 m/sec (63 in/sec) minimum based on the movement being the hand/arm only and the body being stationary (a greater value may be required in specific applications and when body motion must also be considered)

T_s = worst stopping time of the machine/equipment

T_c = worst stopping time of the control system

T_r = response time of the safeguarding device including its interface (T_r for interlocked barrier may include a delay due to actuation. This delay may result in T_r being a deduct- negative value).

D_{pf} = the "Depth penetration factor" is the maximum travel towards the hazard if the guard can be opened a certain width or amount before a stop is signaled.

D_{pf} values from OSHA O-10 Table:

If the maximum width or diameter of the opening is less than or equal to (mm/in)	D_{pf} equals (mm/in)
6,4 / 0.25	12,7 / 0.5
9,5 / 0.375	38,1 / 1.5
12,7 / 0.5	63,5 / 2.5
15,9 / 0.625	88,9 / 3.5
19,1 / 0.75	139,7 / 5.5
22,2 / 0.875	165,1 / 6.5
31,8 / 1.25	190,5 / 7.5
38,1 / 1.5	317,5 / 12.5
47,6 / 1.875	393,7 / 15.5
54 / 2.125	444,5 / 17.5

Note: Over 54 mm / 2.125 in, the D_{pf} equals 800 mm / 31.5 in, with a maximum allowable opening of 152,4 mm / 6 in.

Example: $D_{pf} = 0$ when the guard can be opened up to, but less than 6,4 mm / 0.25 in before issuing a stop command.


$D_{pf} = 444,5$ mm / 17.5 in if the guard can be opened 54,0 mm / 2.125 in.

At no time can the opening be greater than 152,4 mm / 6 in before issuing a stop command.


For more information, refer to the US regulations and standards (OSHA 29 CFR 1910.212 & 1910.217, ANSI B11.19 and ANSI/RIA R15.06).

■ Connection diagram:


**FF-SNC200R2 Control Unit
(Manual reset option)**

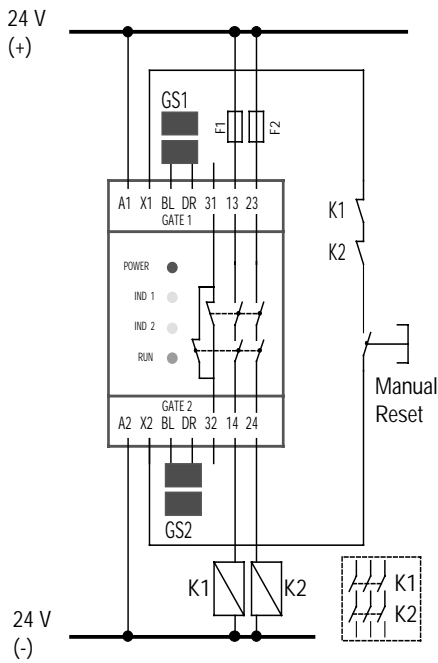

**FF-SNC400R2/FF-SNC400RE Control Unit
(Manual reset option)**

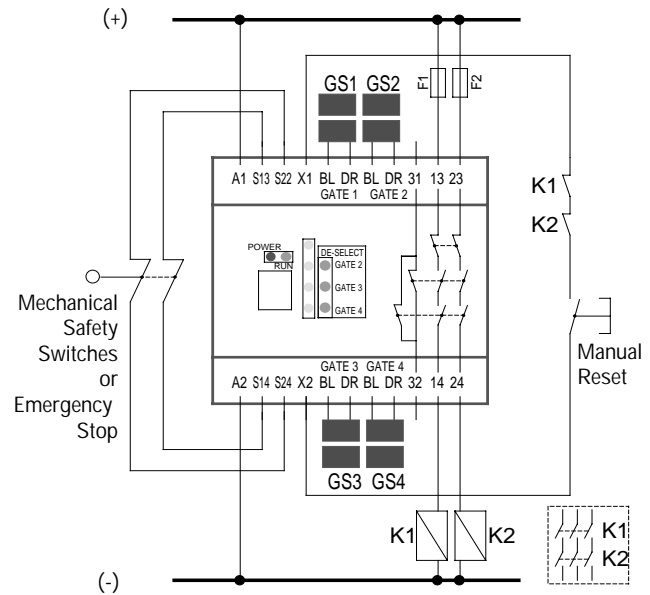


**FF-SNC1EXT Extension Module
(can be used with FF-SNC400 or FF-SNC200 Series, 24 Vac/dc only)**

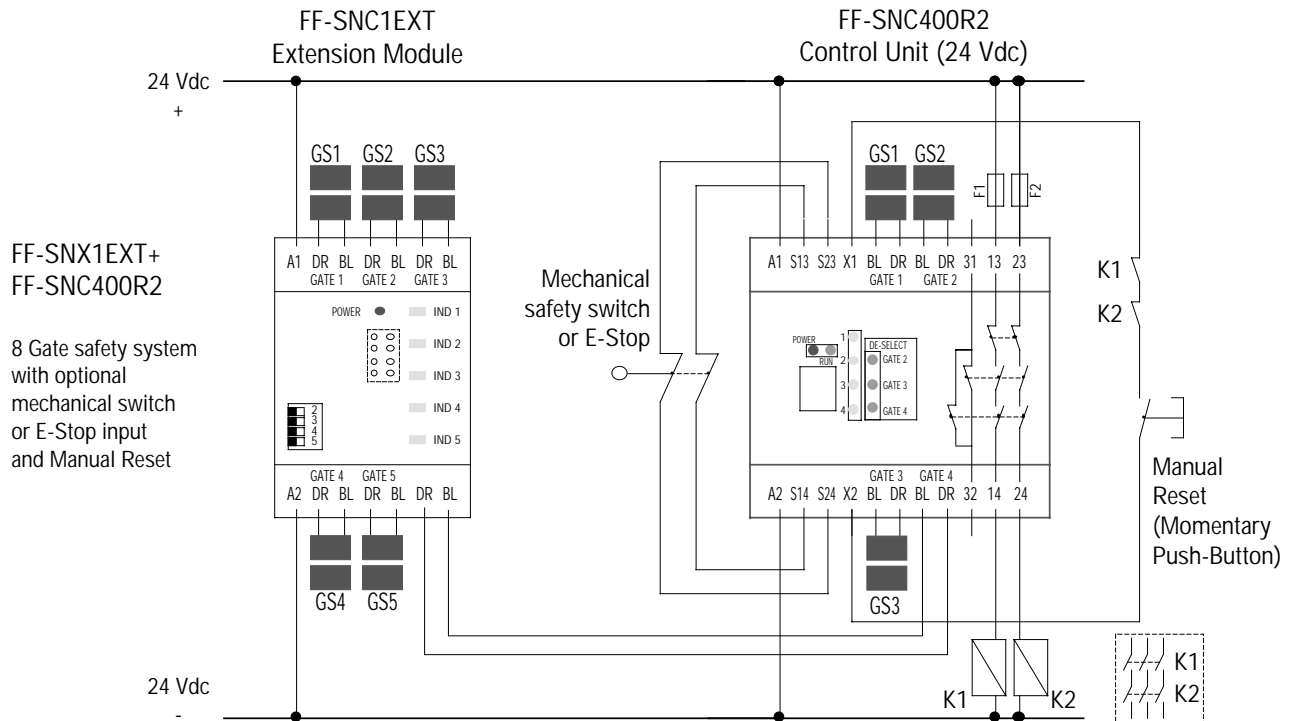


Up to 28 gates can be monitored using 6 extension modules with the FF-SNC400R2. The extension module can only be used with the 24 Vac/dc control units.

LED indicators:


FF-SNC200R2 Control Unit

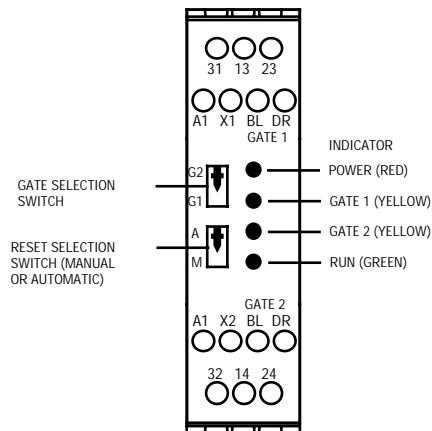

FF-SNC400R2/FF-SNC400RE Control Unit

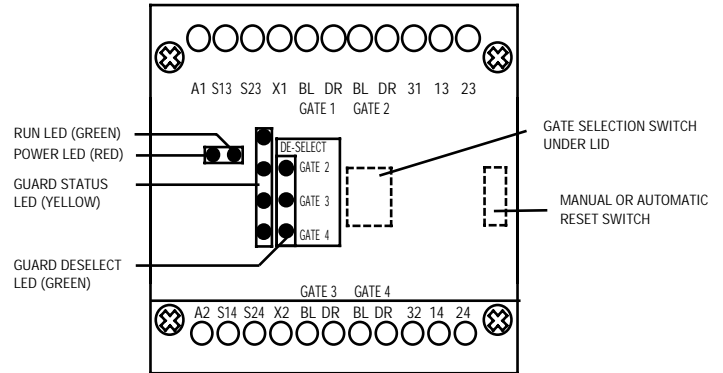

FF-SNC1EXT Control Unit

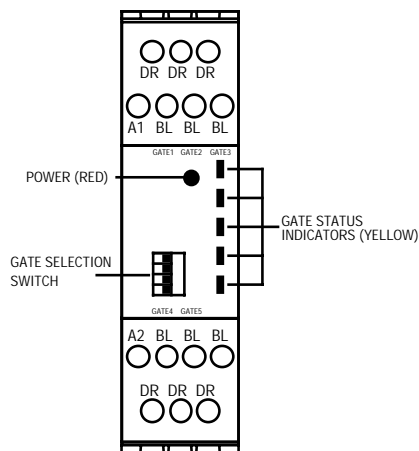

Ordering information

Part number	Description	Weight
FF-SNC200R2	24 Vdc/Vac Control unit for monitoring up to 2 gates	Max. 183 g / 0.403 lb
FF-SNC400R2	24 Vdc/Vac Control unit for monitoring up to 4 gates	Max. 575 g / 1.26 lb
FF-SNC400RE	110 Vac Control unit for monitoring up to 4 gates	Max. 575 g / 1.26 lb
FF-SNC1EXT	Extension module	Max. 135 g / 0.297 lb
FF-SNC1SA03PA	Safety switch + actuator, 3 m / 9.84 ft cable, ABS housing	Max. 150 g / 0.330 lb
FF-SNC1SA05PA	Safety switch + actuator, 5 m / 16.40 ft cable, ABS housing	Max. 200 g / 0.441 lb
FF-SNC1SA03PS	Safety switch + actuator, 3 m / 9.84 ft cable, stainless steel 316 housing	Max. 250 g / 0.551 lb
FF-SNC1SA05PS	Safety switch + actuator, 5 m / 16.40 ft cable, stainless steel 316 housing	Max. 300 g / 0.662 lb
FF-SNC1SA05PA-QD	Safety switch + actuator + M8 cordset, 5 m / 16.40 ft cable, ABS housing	Max. 350 g / 0.771 lb
FF-SNC1SA05PS-QD	Safety switch + actuator + M8 cordset, 5 m / 16.40 ft cable, stainless steel 316 housing	Max. 450 g / 0.992 lb
FF-SNC1SA-050-CBL	Single core cable, 50 m / 164 ft roll	Max. 1,5 kg / 3.307 lbs

Warranty and remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is **in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

While we provide application assistance, personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change at any time without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Sales and Service

Honeywell serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or name of the nearest Authorised Distributor, contact a nearby sales office or:

INTERNET: www.honeywell.com/sensing

E-mail: info.sc@honeywell.com

ASIA PACIFIC

Control Products

Asia Pacific Headquarters

Phone: +(65) 6355-2828
Fax: +(65) 6445-3033

Australia

Honeywell Limited
Phone: +(61) 2-9370-4500
Fax: +(61) 2-9370-4525
Toll Free 1300-36-39-36
Toll Free Fax: 1300-36-04-70

China - PRC - Beijing

Honeywell China Inc.
Phone: +(86-10) 8458-3280
Fax: +(86-10) 8458-3102

China - PRC - Shanghai

Honeywell China Inc.
Phone: +(86-21) 6237-0237
Fax: +(86-21) 6237-1237

China - Hong Kong S.A.R.

Honeywell Ltd.
Phone: +(852) 2953-6412
Fax: +(852) 2953-6767

Indonesia

Honeywell Indonesia Pte Ltd.
Phone: +(62) 21-535-8833
Fax: +(62) 21-5367-1008

India

TATA Honeywell Ltd.
Phone: +(91) 20 687 0445/0446
Fax: +(91) 20 681 2243/687 5992

Japan

Honeywell Inc.
Phone: +(81) 3 5440 1425
Fax: +(81) 3 5440 1368

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799-6167
Fax: +(822) 792-9013

Malaysia

Honeywell Engineering Sdn Bhd
Phone: +(60-3) 7958-4988
Fax: +(60-3) 7958-8922

New Zealand

Honeywell Limited
Phone: +(64-9) 623-5050
Fax: +(64-9) 623-5060
Toll Free (0800) 202-088

Philippines

Honeywell Systems (Philippines) Inc.
Phone: +(63-2) 636-1661/1662
Fax: +(63-2) 638-4013

Singapore

Honeywell South East Asia
Phone: +(65) 6355-2828
Fax: +(65) 6445-3033

Thailand

Honeywell Systems (Thailand) Ltd.
Phone: +(662) 693-3099
Fax: +(662) 693-3085

Taiwan R.O.C.

Honeywell Taiwan Ltd.
Phone: +(886-2) 2245-1000
Fax: +(886-2) 2245-3242

EUROPE

Austria

Honeywell Austria GmbH
Phone: +(43) 1 727 80 366/246
Fax: +(43) 1 727 80 337

Belgium

Honeywell SA/NV
Phone: +(32) 2 728 2522
Fax: +(32) 2 728 2502

Bulgaria

Honeywell EOOD
Phone: +(359) 2 979 00 23
Fax: +(359) 2 979 00 24

Czech Republic

Honeywell spol. s.r.o.
Phone: +(420) 242 442 111
Fax: +(420) 242 442 182

Denmark

Honeywell A/S
Phone: +(45) 39 55 55 55
Fax: +(45) 39 55 55 58

Finland

Honeywell OY
Phone: +(358) 9 3480101
Fax: +(358) 9 34801375

France

Honeywell SA
Phone: +(33) 1 60 19 80 40
Fax: +(33) 1 60 19 81 73

Germany

Honeywell AG
Phone: +(49) 69 8064 444
Fax: +(49) 69 8064 442

Hungary

Honeywell Kft.
Phone: +(36 1) 451 4300
Fax: +(36 1) 451 4343

Italy

Honeywell S.p.A.
Phone: +(39) 02 92146 450/
456
Fax: +(39) 02 92146 490

The Netherlands

Honeywell B.V.
Phone: +(31) 20 565 69 11
Fax: +(31) 20 565 66 00

Norway

Honeywell A/S
Phone: +(47) 66 76 20 00
Fax: +(47) 66 76 20 90

Poland

Honeywell Sp. z o.o.
Phone: +(48)606 0964
Fax: +(48)606 0901

Portugal

Honeywell Portugal Lda
Phone: +(351 21) 424 50 00
Fax: +(351 21) 424 50 99

Romania

Honeywell Bucharest
Phone: +(40) 21 231 64 37/38
Fax: +(40) 21 231 6439

Commonwealth of Independent States (CIS)

Z.A.O. Honeywell
Phone: +(7 095) 796 98 36
Fax: +(7 095) 796 98 93

Slovak Republic

Honeywell s.r.o.
Phone: +(421 2) 58 247 403
Fax: +(421 2) 58 247 415

South Africa (Republic of)

Honeywell Southern Africa
Honeywell S.A. Pty. Ltd
Phone: +(27) 11 805 1201
Fax: +(27) 11 805 1504

Spain

Honeywell S.A.
Phone: +(34) 91 313 6100
Fax: +(34) 91 313 6129

Sweden

Honeywell AB
Phone: +(46) 8 775 55 00
Fax: +(46) 8 775 56 00

Switzerland

Honeywell AG
Phone: +(41) 1 855 24 40
Fax: +(41) 1 855 24 45

Turkey

Honeywell Turkey A.S.
Phone: +(90) 216 575 6620
Fax: +(90) 216 575 6637

Ukraine

Honeywell
Phone: +(380) 44 201 44 74
Fax: +(380) 44 201 44 75

United Kingdom

Honeywell Control Systems Ltd
Phone: +(44) 1698 481481
Fax: +(44) 1698 481676

Mediterranean & African Distributors

Honeywell SpA
Phone: +(39) 2 921 46 232
Fax: +(39) 2 921 46 233

Middle East Headquarters

Honeywell Middle East Ltd.
Phone: +(9712) 443 2119
Fax: +(9712) 443 2536

NORTH AMERICA

USA/Canada

Honeywell
Control Products, International
Headquarters
Phone: 1-800-537-6945
1-815-235-6847
Fax: 1-815-235-6545
E-mail: info.sc@honeywell.com

LATIN AMERICA

Honeywell Latin America Headquarters

Phone: 1-305-805-8188
Fax: 1-305-883-8257

Argentina

Honeywell S.A.I.C.
Phone: +(54-11) 4383-3637
Fax: +(54-11) 4325-6470

Brazil

Honeywell do Brasil & Cia
Phone: +(55-11) 4166-1900
Fax: +(55-11) 4166-1901

Chile

Honeywell Chile, S.A.
Phone: +(56-2) 425-8400
Fax: +(56-2) 425-8410

Mexico

Honeywell S.A. de C.V.
Phone: +(52) 55 5081-0200
Fax: +(52) 55 5081-0202

Puerto Rico, Caribbean

Honeywell Inc.
Phone: +(809) 792-7075
Fax: +(809) 792-0053

Venezuela

Honeywell CA
Phone: +(58-212) 273-0511
Fax: +(58-212) 273-0599

This publication does not constitute a contract between Honeywell and its customers. The contents may be changed at any time without notice. It is the customer's responsibility to ensure safe installation and operation of the products. Detailed mounting drawings of all products illustrated are available on request.

© 2002 - 2004 Honeywell International Inc. All rights reserved.

Honeywell

Honeywell

21 Chemin du Vieux Chêne
38240 Meylan Cedex
France

Honeywell

11 West Spring Street
Freeport, Illinois 61032
USA