

July 1997 Revised December 1999

# FST16213 24-Bit Bus Exchange Switch

#### **General Description**

The Fairchild Switch FST16213 provides 24-bits of highspeed CMOS TTL-compatible bus switching or exchanging. The low on resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise.

The device operates as a 24-bit bus switch or a 12-bit bus exchanger, which allows data exchange between the four signal ports via the data-select terminals.

#### **Features**


- $\blacksquare$  4 $\Omega$  switch connection between two ports.
- Minimal propagation delay through the switch.
- Low I<sub>CC</sub>.
- Zero bounce in flow-through mode.
- Control inputs compatible with TTL level.

## **Ordering Code:**

Order Number	Package Number	Package Description						
FST16213MEA	MS56A	56-Lead Shrink Small Outline Package (SSOP), JEDEC MO-118, 0.300 Wide						
FST16213MTD	MTD56	56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide						

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.


#### **Logic Diagram**



© 1999 Fairchild Semiconductor Corporation

DS500039

# **Connection Diagram**

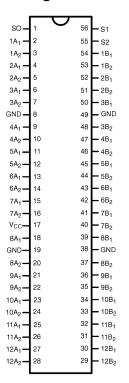

## **Pin Descriptions**

Pin Name	Description
S2, S1, S0	Data-select inputs
A <sub>1</sub> , A <sub>2</sub>	Bus A
B <sub>1</sub> , B <sub>2</sub>	Bus B

## **Truth Table**

S2	S1	S0	A <sub>1</sub>	A <sub>2</sub>	Function
L	L	L	Z	Z	Disconnect
L	L	Н	B <sub>1</sub>	Z	$A_1 = B_1$
L	Н	L	B <sub>2</sub>	Z	$A_1 = B_2$
L	Н	Н	Z	B <sub>1</sub>	$A_2 = B_1$
Н	L	L	Z	$B_2$	$A_2 = B_2$
Н	L	Н	A <sub>2</sub> and B <sub>2</sub>	$A_1$ and $B_2$	$A_1=A_2=B_2$
Н	Н	L	B <sub>1</sub>	$B_2$	$A_1 = B_1, \ A_2 = B_2$
Н	Н	Н	$B_2$	B <sub>1</sub>	$A_1 = B_2, A_2 = B_1$

#### **Absolute Maximum Ratings**(Note 1)

# Recommended Operating Conditions (Note 3)

 $\begin{array}{ll} \mbox{Power Supply Operating ($V_{CC}$)} & 4.0\mbox{V to } 5.5\mbox{V} \\ \mbox{Input Voltage ($V_{IN}$)} & 0\mbox{V to } 5.5\mbox{V} \\ \mbox{Output Voltage ($V_{OUT}$)} & 0\mbox{V to } 5.5\mbox{V} \\ \end{array}$ 

Input Rise and Fall Time (t<sub>r</sub>, t<sub>f</sub>)

Switch Control Input 0nS/V to 5nS/V Switch I/O 0nS/V to DC Free Air Operating Temperature ( $T_A$ ) -40 °C to +85 °C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum rating. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused control inputs must be held high or low. They may not float.

#### **DC Electrical Characteristics**

		V <sub>CC</sub> (V)	$T_A = -40$ °C to +85 °C					
Symbol	Parameter		Min	Typ (Note 4)	Max	Units	Conditions	
V <sub>IK</sub>	Clamp Diode Voltage	4.5			-1.2	V	$I_{IN} = -18mA$	
V <sub>IH</sub>	HIGH Level Input Voltage	4.0-5.5	2.0			V		
V <sub>IL</sub>	LOW Level Input Voltage	4.0-5.5			0.8	V		
I	Input Leakage Current	5.5			±1.0	μΑ	0≤ V <sub>IN</sub> ≤5.5V	
		0			10	μΑ	V <sub>IN</sub> = 5.5V	
I <sub>OZ</sub>	OFF-STATE Leakage Current	5.5			±1.0	μΑ	0 ≤A, B ≤V <sub>CC</sub>	
R <sub>ON</sub>	Switch On Resistance	4.5		4	7	Ω	V <sub>IN</sub> = 0V, I <sub>IN</sub> = 64mA	
	A to B or B to A	4.5		4	7	Ω	V <sub>IN</sub> = 0V, I <sub>IN</sub> = 30mA	
	(Note 5)	4.5		8	12	Ω	V <sub>IN</sub> = 2.4V, I <sub>IN</sub> = 15mA	
		4.0		11	20	Ω	V <sub>IN</sub> = 2.4V, I <sub>IN</sub> = 15mA	
	Switch On Resistance	4.5		10	14	Ω	V <sub>IN</sub> = 0V, I <sub>IN</sub> = 64mA	
	A1 to A2	4.5		10	14	Ω	$V_{IN} = 0V$ , $I_{IN} = 30mA$	
	(Note 5)	4.5		16	22	Ω	V <sub>IN</sub> = 2.4V, I <sub>IN</sub> = 15mA	
		4.0		22	30	Ω	V <sub>IN</sub> = 2.4V, I <sub>IN</sub> = 15mA	
I <sub>CC</sub>	Quiescent Supply Current	5.5			3	μΑ	$V_{IN} = V_{CC}$ or GND, $I_{OUT} = 0$	
ΔI <sub>CC</sub>	Increase in I <sub>CC</sub> per Input	5.5			2.5	mA	One input at 3.4V	
							Other inputs at V <sub>CC</sub> or GND	

Note 4: Typical values are at V<sub>CC</sub> = 5.0V and T<sub>A</sub> = +25°C

Note 5: Measured by the voltage drop between A and B pins at the indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B) pins.

## **AC Electrical Characteristics**

Combal	Parameter		T <sub>A</sub> = -40 °C _ = 50pF, RU			IIii	O and Hillians	Element No.
Symbol		$V_{CC} = 4.5 - 5.5V$		$V_{CC} = 4.0V$		Units	Conditions	Figure No.
		Min	Max	Min	Max	1		
t <sub>PHL</sub> ,t <sub>PLH</sub>	Prop Delay Bus to Bus (Note 6)		0.25		0.25	ns	V <sub>I</sub> = OPEN	Figure 1 Figure 2
t <sub>PHL</sub> ,t <sub>PLH</sub>	Prop Delay A1 to A2		0.5		0.5	ns	V <sub>I</sub> = OPEN	Figure 1 Figure 2
t <sub>PZH</sub> , t <sub>PZL</sub>	Output Enable Time, S to A or B	1.5	7.5		8.0	ns	$V_I = 7V$ for $t_{PZL}$ $V_I = OPEN$ for $t_{PZH}$	Figure 1 Figure 2
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Output Disable Time S to A or B	1.0	8.5		9.0	ns	$V_I = 7V$ for $t_{PLZ}$ $V_I = OPEN$ for $t_{PHZ}$	Figure 1 Figure 2
t <sub>PZH</sub> , t <sub>PZL</sub>	Output Enable Time, S0 to A2 and B2	1.5	9.5		10.0	ns	$V_I = 7V$ for $t_{PZL}$ $V_I = OPEN$ for $t_{PZH}$	Figure 1 Figure 2
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Output Disable Time, S0 to A2 and B2	1.5	9.0		10.0	ns	$V_I = 7V$ for $t_{PLZ}$ $V_I = OPEN$ for $t_{PHZ}$	Figure 1 Figure 2


Note 6: This parameter is guaranteed by design but is not tested. The bus switch contributes no propagation delay other than the RC delay of the typical On resistance of the switch and the 50pF load capacitance, when driven by an ideal voltage source (zero output impedance).

#### Capacitance (Note 7)

Symbol	Parameter	Тур	Max	Units	Conditions
C <sub>IN</sub>	Control pin Input Capacitance	3		pF	V <sub>CC</sub> = 5.0V
C <sub>I/O</sub>	Input/Output Capacitance	10		pF	V <sub>CC</sub> = 5.0V
					S0, S1, or S2 = GND

Note 7: T<sub>A</sub> = +25°C, f = 1 MHz, Capacitance is characterized but not tested.

# **AC Loading and Waveforms**



Note: Input driven by 50  $\Omega$  source terminated in 50  $\Omega$  Note:  $\text{C}_L$  includes load and stray capacitance

Note: Input PRR = 1.0 MHz,  $t_W$  = 500 ns

FIGURE 1. AC Test Circuit



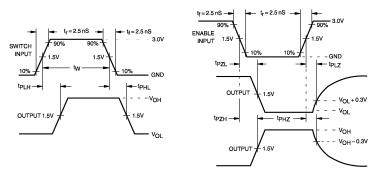


FIGURE 2. AC Waveforms

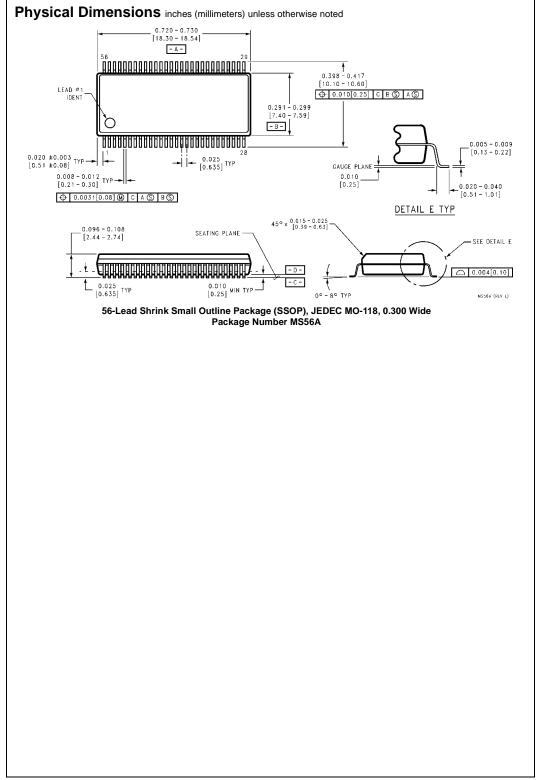

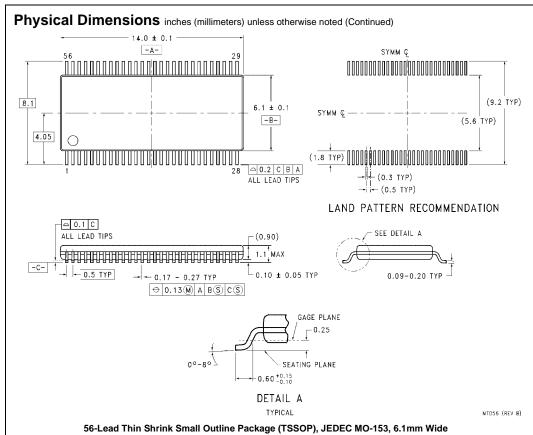

#### **Technology Description**

The Fairchild Switch family derives from and embodies Fairchild's proven switch technology used for several years in its 74LVX3L384 (FST3384) bus switch product.

Package Number MTD56

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com