

# BZX55C2V4RL Series

## 500 mW DO-35 Hermetically Sealed Glass Zener Voltage Regulators

This is a complete series of 500 mW Zener diodes with limits and excellent operating characteristics that reflect the superior capabilities of silicon-oxide passivated junctions. All this in an axial-lead hermetically sealed glass package that offers protection in all common environmental conditions.

### Specification Features:

- Zener Voltage Range – 2.4 V to 33 V
- ESD Rating of Class 3 (>16 KV) per Human Body Model
- DO-204AH (DO-35) Package – Smaller than Conventional DO-204AA Package
- Double Slug Type Construction
- Metallurgical Bonded Construction

### Mechanical Characteristics:

**CASE:** Double slug type, hermetically sealed glass

**FINISH:** All external surfaces are corrosion resistant and leads are readily solderable

**MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES:** 230°C, 1/16" from the case for 10 seconds

**POLARITY:** Cathode indicated by polarity band

**MOUNTING POSITION:** Any

### MAXIMUM RATINGS (Note 1)


Rating	Symbol	Value	Unit
Max. Steady State Power Dissipation @ $T_L \leq 75^\circ\text{C}$ , Lead Length = 3/8" Derate above 75°C	$P_D$	500	mW
		4.0	mW/°C
Operating and Storage Temperature Range	$T_J, T_{stg}$	-65 to +200	°C

1. Some part number series have lower JEDEC registered ratings.




**ON Semiconductor®**

<http://onsemi.com>



### MARKING DIAGRAM



- L = Assembly Location
- 55Cxxx = Device Code  
(See Table Next Page)
- Y = Year
- WW = Work Week

### ORDERING INFORMATION


Device	Package	Shipping
BZX55CxxxRL	Axial Lead	5000/Tape & Reel
BZX55CxxxRL2*	Axial Lead	5000/Tape & Reel

\* The "2" suffix refers to 26 mm tape spacing.

## BZX55C2V4RL Series

**ELECTRICAL CHARACTERISTICS** ( $T_L = 30^\circ\text{C}$  unless otherwise noted,  $V_F = 1.5\text{ V Max @ } I_F = 100\text{ mA}$  for all types)

Symbol	Parameter
$V_Z$	Reverse Zener Voltage @ $I_{ZT}$
$I_{ZT}$	Reverse Current
$Z_{ZT}$	Maximum Zener Impedance @ $I_{ZT}$
$\Theta V_{BR}$	Temperature Coefficient of $V_{BR}$ (Typical)
$I_R$	Reverse Leakage Current ( $T_A = 25^\circ\text{C}$ ) @ $V_R$
$V_R$	Breakdown Voltage
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$
C	Capacitance (Typical)

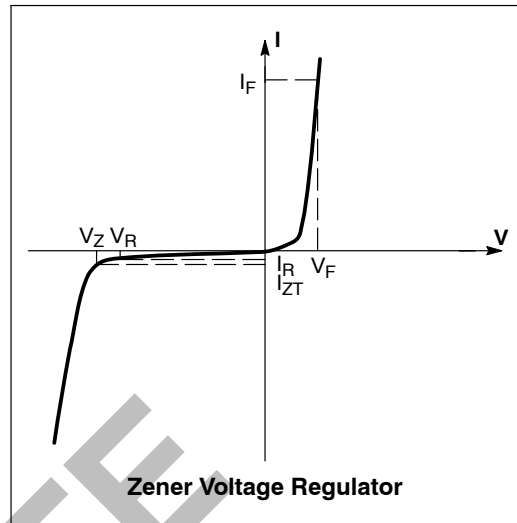

**OBSOLETE**  
THIS DEVICE IS OBSOLETE  
PLEASE CONTACT YOUR ON SEMICONDUCTOR  
REPRESENTATIVE FOR INFORMATION

## BZX55C2V4RL Series

**ELECTRICAL CHARACTERISTICS** ( $T_L = 30^\circ\text{C}$  unless otherwise noted,  $V_F = 1.3\text{ V Max}$ ,  $I_F = 100\text{ mAdc}$  for all types)

Device	Device Marking	$V_{ZT}$ at $I_{ZT}$ (V)		Max Zener Impedance (Note 4) $Z_{ZT}$ @ $I_{ZT}$ (Ohms) Max	$I_{ZT}$ (mA)	Max Reverse Leakage Current $I_R$ at $V_R$ ( $\mu\text{A}$ )		$V_R$ (V)	$I_{ZM}$ (mA) (Note 3)
		Min (Note 2)	Max (Note 2)			$T_{amb}$ 25°C Max	$T_{amb}$ 125°C Max		
BZX55C2V4RL	55C2V4	2.28	2.56	85	5	50	100	1	155
BZX55C2V7RL	55C2V7	2.5	2.9	85	5	10	50	1	135
BZX55C3V0RL	55C3V0	2.8	3.2	85	5	4	40	1	125
BZX55C3V3RL	55C3V3	3.1	3.5	85	5	2	40	1	115
BZX55C3V6RL	55C3V6	3.4	3.8	85	5	2	40	1	105
BZX55C3V9RL	55C3V9	3.7	4.1	85	5	2	40	1	95
BZX55C4V3RL	55C4V3	4	4.6	75	5	1	20	1	90
BZX55C4V7RL	55C4V7	4.4	5	60	5	0.5	10	1	85
BZX55C5V1RL	55C5V1	4.8	5.4	35	5	0.1	2	1	80
BZX55C5V6RL	55C5V6	5.2	6	25	5	0.1	2	1	70
BZX55C6V2RL	55C6V2	5.8	6.6	10	5	0.1	2	2	64
BZX55C6V8RL	55C6V8	6.4	7.2	8	5	0.1	2	3	58
BZX55C7V5RL	55C7V5	7	7.9	7	5	0.1	2	5	53
BZX55C8V2RL	55C8V2	7.7	8.7	7	5	0.1	2	6	47
BZX55C9V1RL	55C9V1	8.5	9.6	10	5	0.1	2	7	43
BZX55C10RL	55C10	9.4	10.6	15	5	0.1	2	7.5	40
BZX55C11RL	55C11	10.4	11.6	20	5	0.1	2	8.5	36
BZX55C12RL	55C12	11.4	12.7	20	5	0.1	2	9	32
BZX55C13RL	55C13	12.4	14.1	26	5	0.1	2	10	29
BZX55C15RL	55C15	13.8	15.6	30	5	0.1	2	11	27
BZX55C16RL	55C16	15.3	17.1	40	5	0.1	2	12	24
BZX55C18RL	55C18	16.8	19.1	50	5	0.1	2	14	21
BZX55C20RL	55C20	18.8	21.1	55	5	0.1	2	15	20
BZX55C22RL	55C22	20.8	23.3	55	5	0.1	2	17	18
BZX55C24RL	55C24	22.8	25.6	80	5	0.1	2	18	16
BZX55C27RL	55C27	25.1	28.9	80	5	0.1	2	20	14
BZX55C30RL	55C30	28	32	80	5	0.1	2	22	13
BZX55C33RL	55C33	31	35	80	5	0.1	2	24	12
BZX55C36RL	55C36	34	38	80	5	0.1	2	27	11
BZX55C39RL	55C39	37	41	90	2.5	0.1	5	28	10
BZX55C43RL	55C43	40	46	90	2.5	0.1	5	32	9.2
BZX55C47RL	55C47	44	50	110	2.5	0.1	5	35	8.5
BZX55C51RL	55C51	48	54	125	2.5	0.1	10	38	7.8
BZX55C56RL	55C56	52	60	135	2.5	0.1	10	42	7
BZX55C62RL	55C62	58	66	150	2.5	0.1	10	47	6.4
BZX55C68RL	55C68	64	72	160	2.5	0.1	10	51	5.9
BZX55C75RL	55C75	70	80	170	2.5	0.1	10	56	5.3
BZX55C82RL	55C82	77	87	200	2.5	0.1	10	62	4.8
BZX55C91RL	55C91	85	96	250	1	0.1	10	69	4.3

### 2. TOLERANCE AND VOLTAGE DESIGNATION

Tolerance designation - the type numbers listed have zener voltage min/max limits as shown. Device tolerance of  $\pm 2\%$  are indicated by a "B" instead of a "C". Zener voltage is measured with the device junction in thermal equilibrium at the lead temperature of  $30^\circ\text{C} \pm 1^\circ\text{C}$  and  $3/8"$  lead length.

3. This data was calculated using nominal voltages. The maximum current handling capability on a worst case basis is limited by the actual zener voltage at the operating point and the powered derating curve.

4.  $Z_{ZT}$  and  $Z_{ZK}$  are measured by dividing the ac voltage drop across the device by the ac current applied. The specified limits are for  $I_{Z(ac)} = 0.1 I_{Z(dc)}$  with the ac frequency = 1.0 kHz.

## BZX55C2V4RL Series

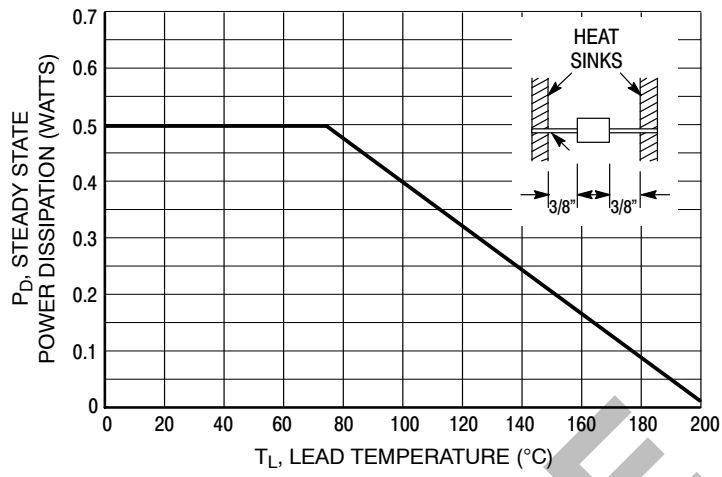


Figure 1. Steady State Power Derating

**OBSOLETE**  
THIS DEVICE IS OBSOLETE  
PLEASE CONTACT YOUR ON SEMICONDUCTOR  
REPRESENTATIVE FOR INFORMATION

APPLICATION NOTE — ZENER VOLTAGE

Since the actual voltage available from a given zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature,  $T_L$ , should be determined from:

$$T_L = \theta_{LA}P_D + T_A.$$

$\theta_{LA}$  is the lead-to-ambient thermal resistance ( $^{\circ}C/W$ ) and  $P_D$  is the power dissipation. The value for  $\theta_{LA}$  will vary and depends on the device mounting method.  $\theta_{LA}$  is generally 30 to  $40^{\circ}C/W$  for the various clips and tie points in common use and for printed circuit board wiring.

The temperature of the lead can also be measured using a thermocouple placed on the lead as close as possible to the tie point. The thermal mass connected to the tie point is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of  $T_L$ , the junction temperature may be determined by:

$$T_J = T_L + \Delta T_{JL}.$$

$\Delta T_{JL}$  is the increase in junction temperature above the lead temperature and may be found from Figure 2 for dc power:

$$\Delta T_{JL} = \theta_{JL}P_D.$$

For worst-case design, using expected limits of  $I_Z$ , limits of  $P_D$  and the extremes of  $T_J(\Delta T_J)$  may be estimated. Changes in voltage,  $V_Z$ , can then be found from:

$$\Delta V = \theta_{VZ}T_J.$$

$\theta_{VZ}$ , the zener voltage temperature coefficient, is found from Figures 4 and 5.

Under high power-pulse operation, the zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Surge limitations are given in Figure 7. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots, resulting in device degradation should the limits of Figure 7 be exceeded.

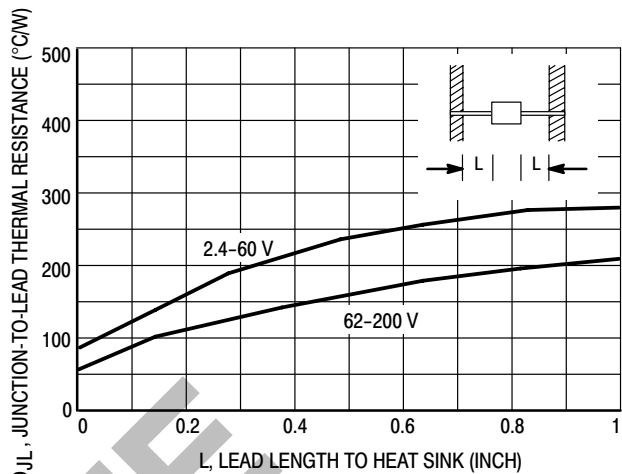


Figure 2. Typical Thermal Resistance

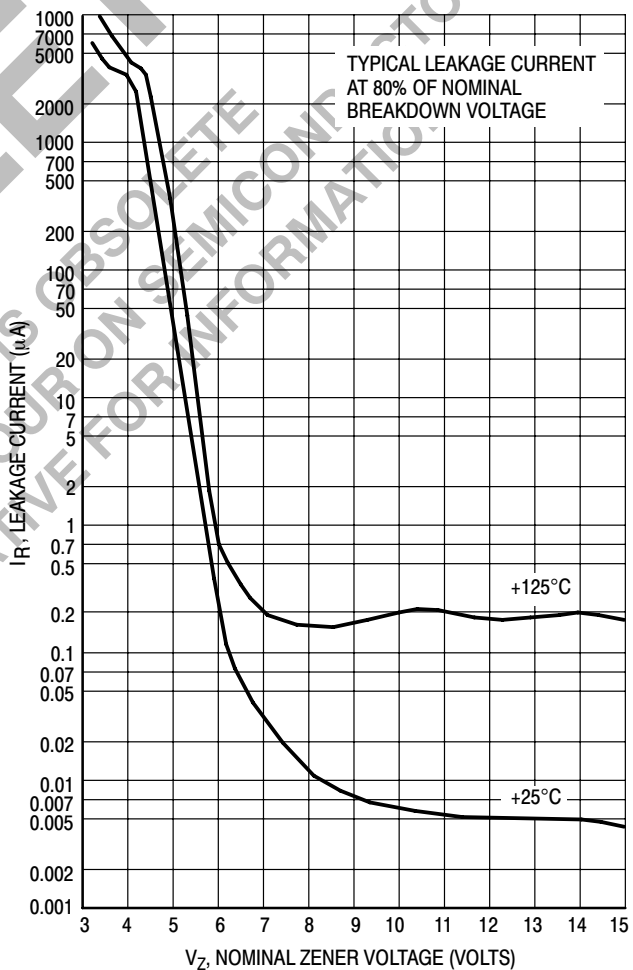


Figure 3. Typical Leakage Current

# BZX55C2V4RL Series

## TEMPERATURE COEFFICIENTS

(-55°C to +150°C temperature range; 90% of the units are in the ranges indicated.)

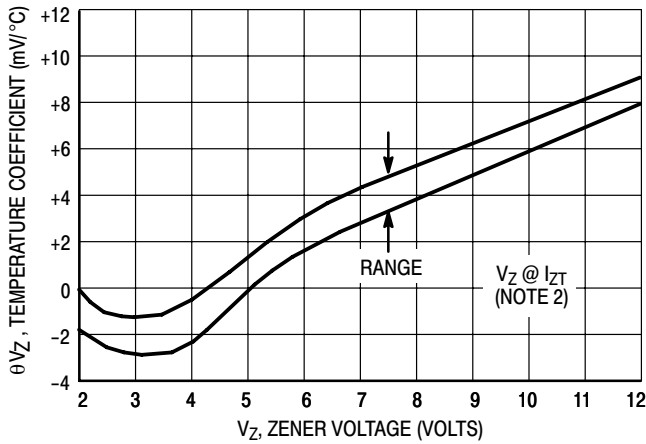


Figure 4a. Range for Units to 12 Volts

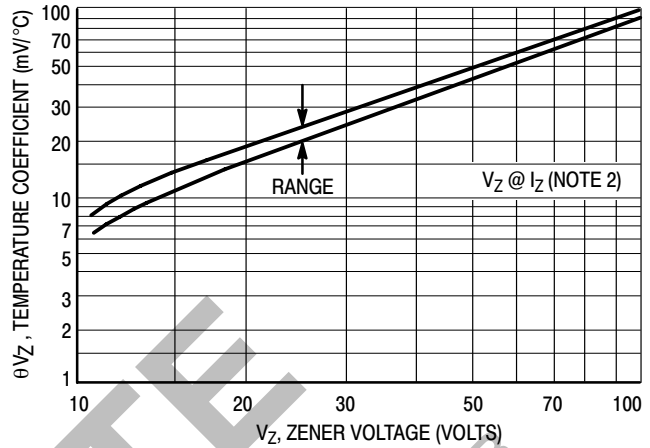


Figure 4b. Range for Units 12 to 100 Volts

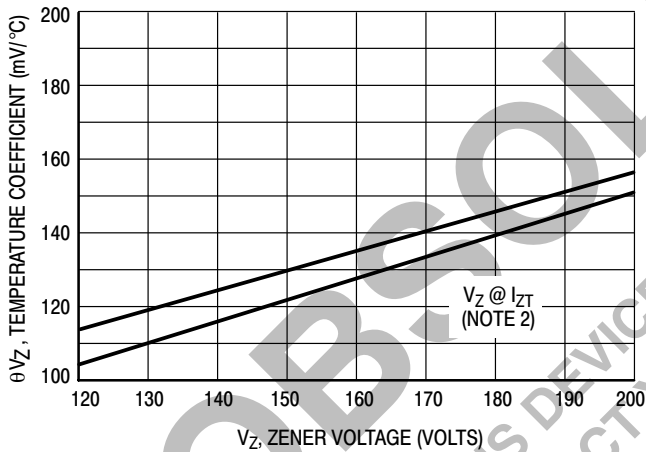


Figure 4c. Range for Units 120 to 200 Volts

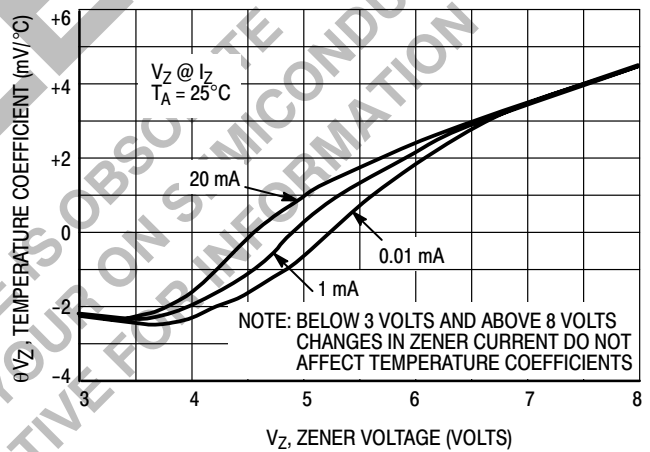


Figure 5. Effect of Zener Current

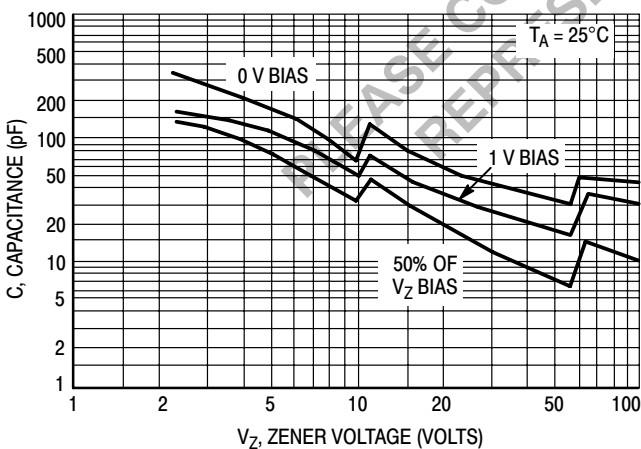


Figure 6a. Typical Capacitance 2.4-100 Volts

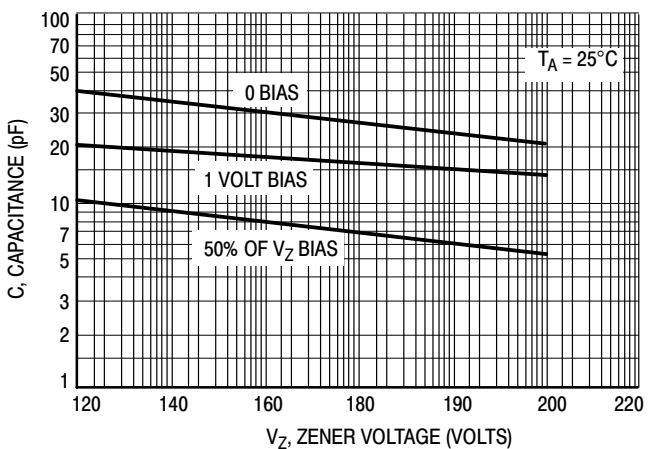


Figure 6b. Typical Capacitance 120-200 Volts

# BZX55C2V4RL Series

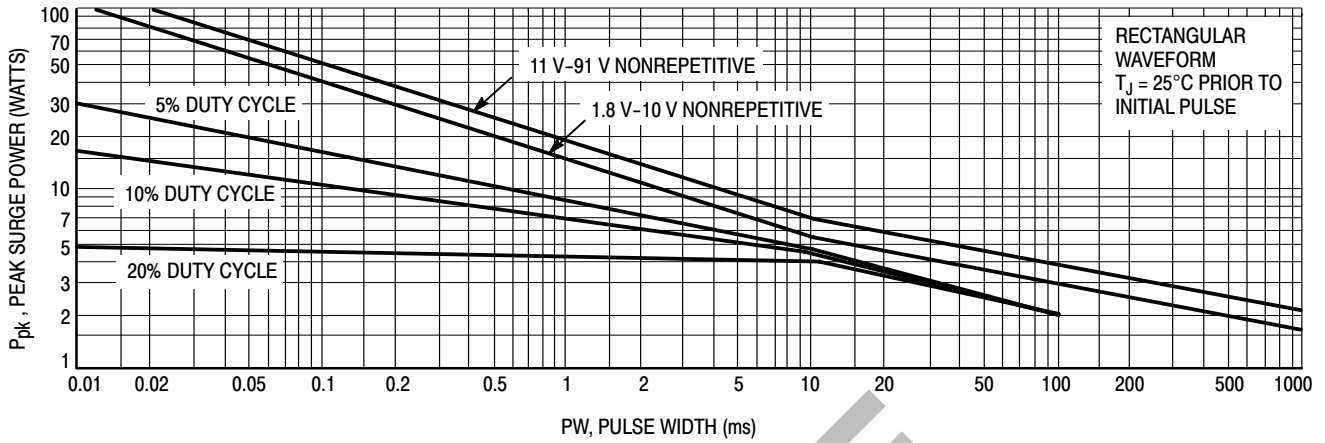


Figure 7a. Maximum Surge Power 1.8-91 Volts

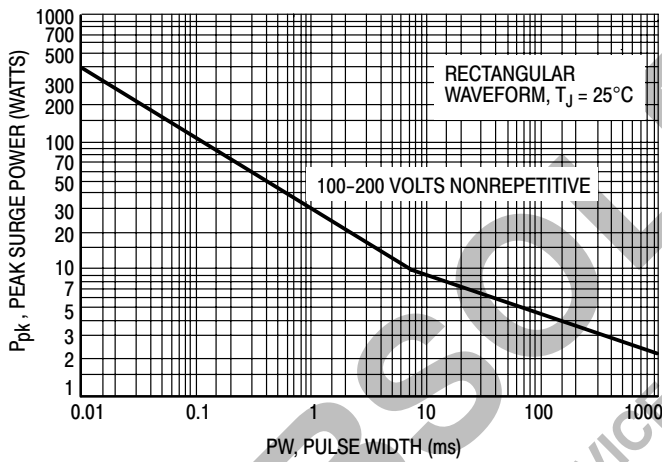


Figure 7b. Maximum Surge Power DO-204AH 100-200 Volts

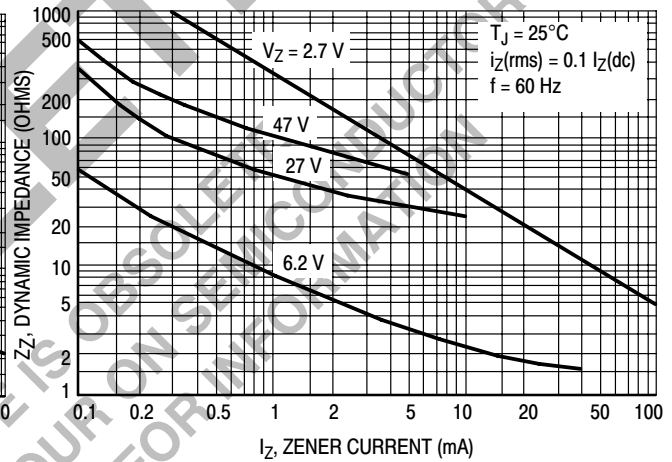


Figure 8. Effect of Zener Current on Zener Impedance

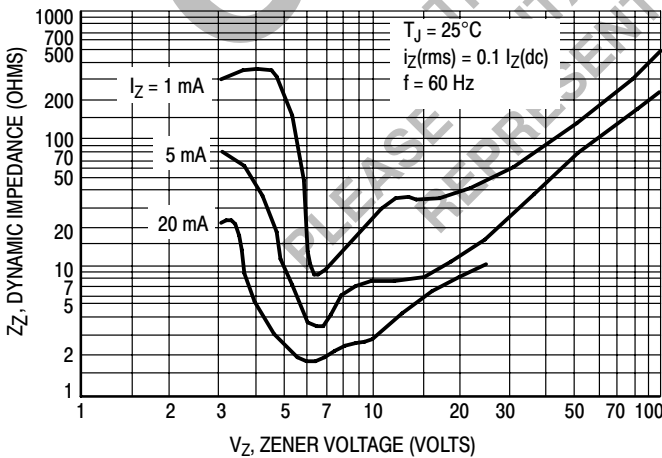


Figure 9. Effect of Zener Voltage on Zener Impedance

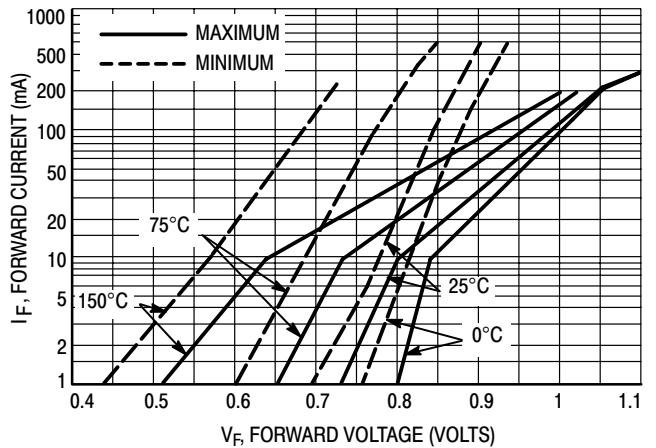


Figure 10. Typical Forward Characteristics

# BZX55C2V4RL Series

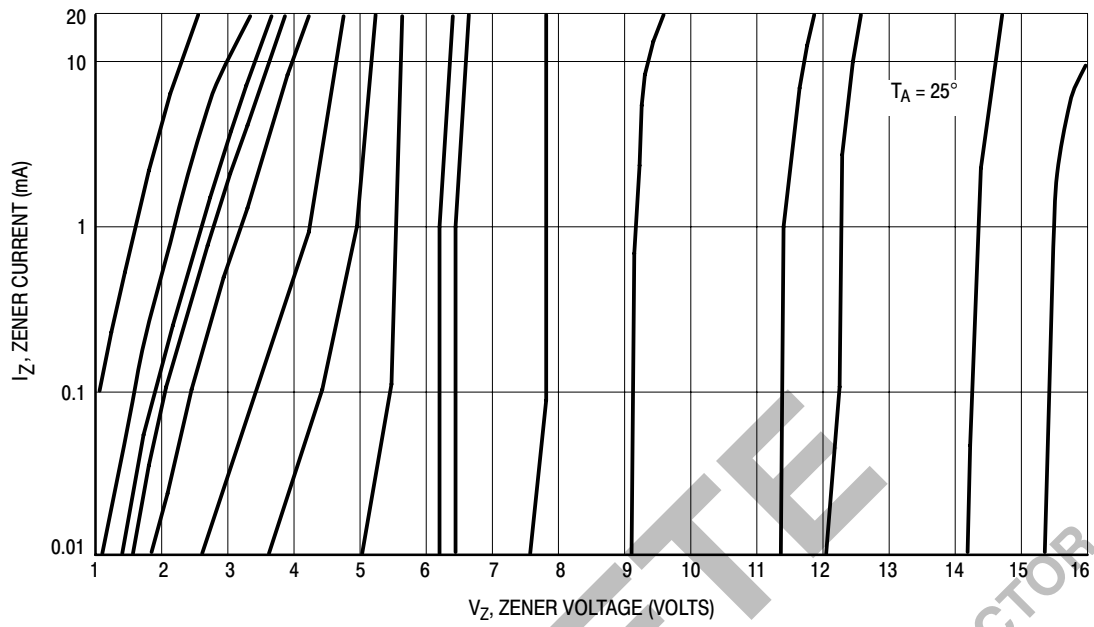


Figure 11. Zener Voltage versus Zener Current —  $V_Z = 1$  thru 16 Volts

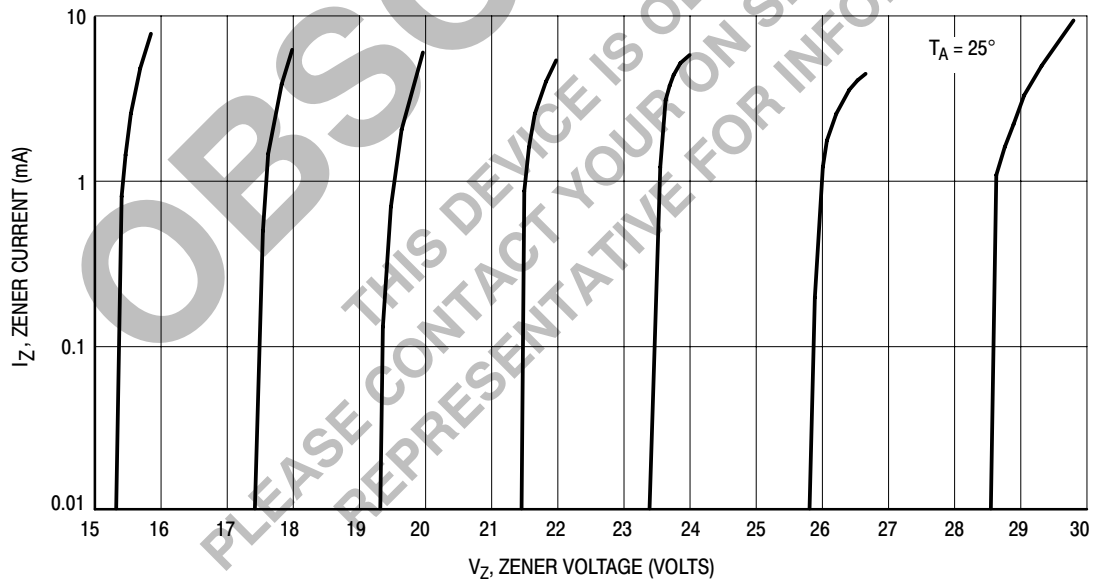


Figure 12. Zener Voltage versus Zener Current —  $V_Z = 15$  thru 30 Volts



## BZX55C2V4RL Series

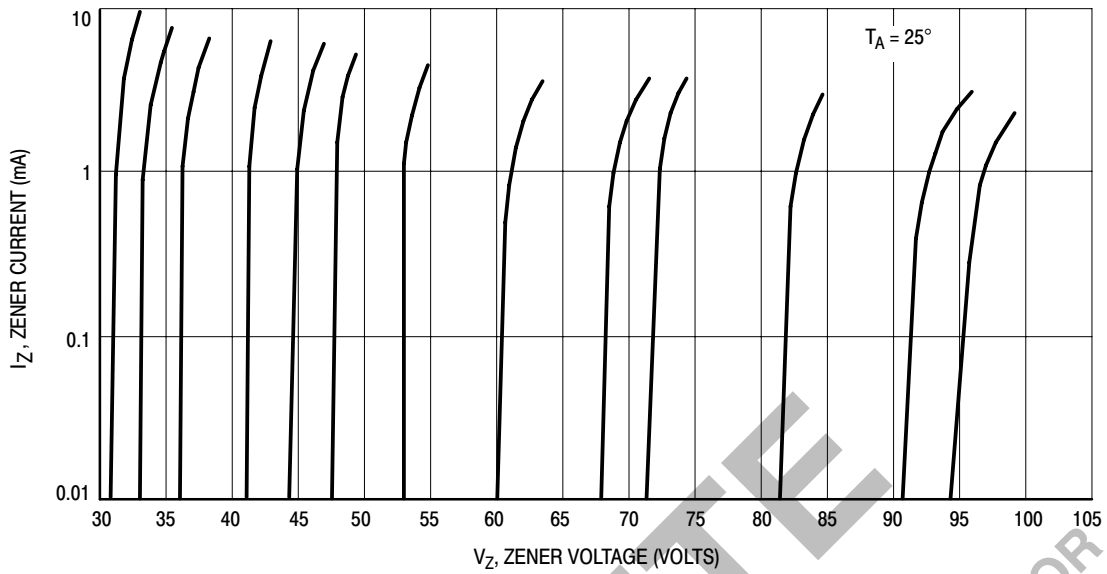


Figure 13. Zener Voltage versus Zener Current —  $V_Z = 30$  thru 105 Volts

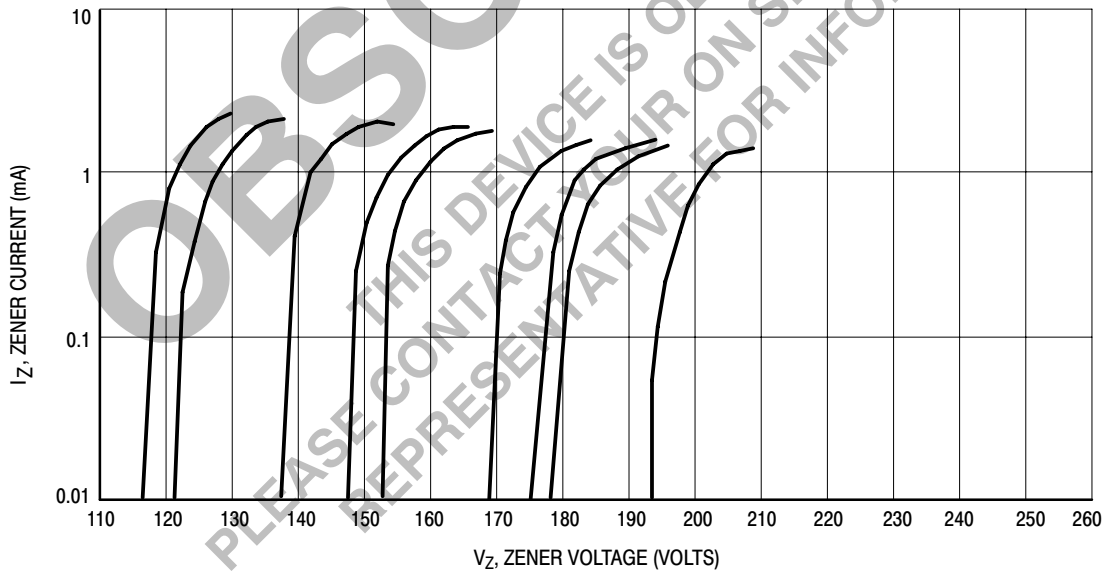


Figure 14. Zener Voltage versus Zener Current —  $V_Z = 110$  thru 220 Volts

# BZX55C2V4RL Series

## OUTLINE DIMENSIONS


# Zener Voltage Regulators – Axial Leaded

## 500 mW DO–35 Glass

GLASS DO–35/D0–204AH

CASE 299–02


ISSUE A

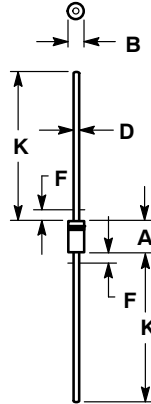

- NOTES:
1. PACKAGE CONTOUR OPTIONAL WITHIN A AND B HEAT SLUGS, IF ANY, SHALL BE INCLUDED WITHIN THIS CYLINDER, BUT NOT SUBJECT TO THE MINIMUM LIMIT OF B.
  2. LEAD DIAMETER NOT CONTROLLED IN ZONE F TO ALLOW FOR FLASH, LEAD FINISH BUILDUP AND MINOR IRREGULARITIES OTHER THAN HEAT SLUGS.
  3. POLARITY DENOTED BY CATHODE BAND.
  4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.05	5.08	0.120	0.200
B	1.52	2.29	0.060	0.090
D	0.46	0.56	0.018	0.022
F	---	1.27	---	0.050
K	25.40	38.10	1.000	1.500

All JEDEC dimensions and notes apply.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

**BZX55C2V4RL/D**