




CMD333UWC Series T-1 3/4 White LEDs

DESCRIPTION AND FEATURES

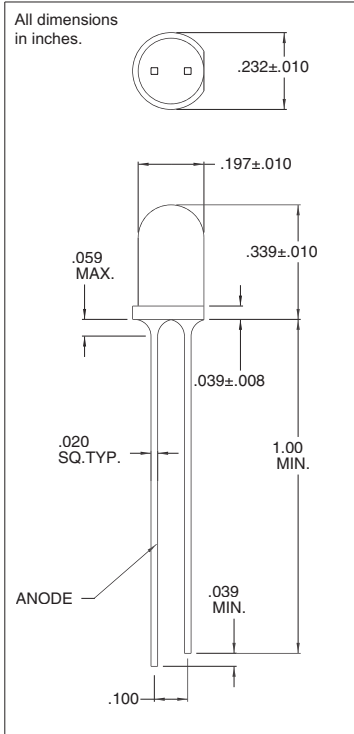

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

PART NUMBER	CMD333UWC
Output Color	White
Diffusion	Non-Diffused
Package Color	Clear
Test Current (mA)	20
Forward Voltage Typ. (V)	3.75
Forward Voltage Max. (V)	3.85
Luminous Intensity Min. (mcd)	1700
Luminous Intensity Typ. (mcd)	2300
Luminous Intensity Max. (mcd)	2600
Peak Wavelength (nm)	475
Viewing Angle (degrees)	20
Power Dissipation (mW)	-
Operating Temperature (°C)	-20 to +70
Storage Temperature (°C)	-30 to +100
Peak Forward Current Max. (Typ @ 10% duty cycle) (mA)	-
Reverse Voltage (IR=100µA) (V)	5.0
Lead Solder Time @ 260°C	5

147 Central Avenue
 Hackensack, NJ 07601
 Phone: (201) 489-8989
 Fax: (201) 489-6911

18703 Dix Toledo Road
 Brownstown, MI 48193

Saret Zone Franca, Edificio B
 Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product