




Up to Category 2, EN 954-1 PNOZ X7



Safety relay for monitoring E-STOP pushbuttons.

Approvals

	PNOZ X7
	◆
	◆
	◆

Unit features

- ▶ Positive-guided relay outputs:
 - 2 safety contacts (N/O), instantaneous
- ▶ Connection options for:
 - E-STOP pushbutton
 - Reset button
- ▶ LED indicator for:
 - Switch status channel 1/2
 - Supply voltage
- ▶ See order reference for unit types

- ▶ The circuit is redundant with built-in self-monitoring.
- ▶ The safety function remains effective in the case of a component failure.
- ▶ The correct opening and closing of the safety function relays is tested automatically in each on-off cycle.

Unit description

The safety relay meets the requirements of EN 60204-1 and IEC 60204-1 and may be used in applications with

- ▶ E-STOP pushbuttons


The safety relay is not suitable for non-contact barriers because

- ▶ a dynamic start is not possible
- ▶ the unit can be started during the delay-on de-energisation time.

Safety features

The relay conforms to the following safety criteria:

Block diagram

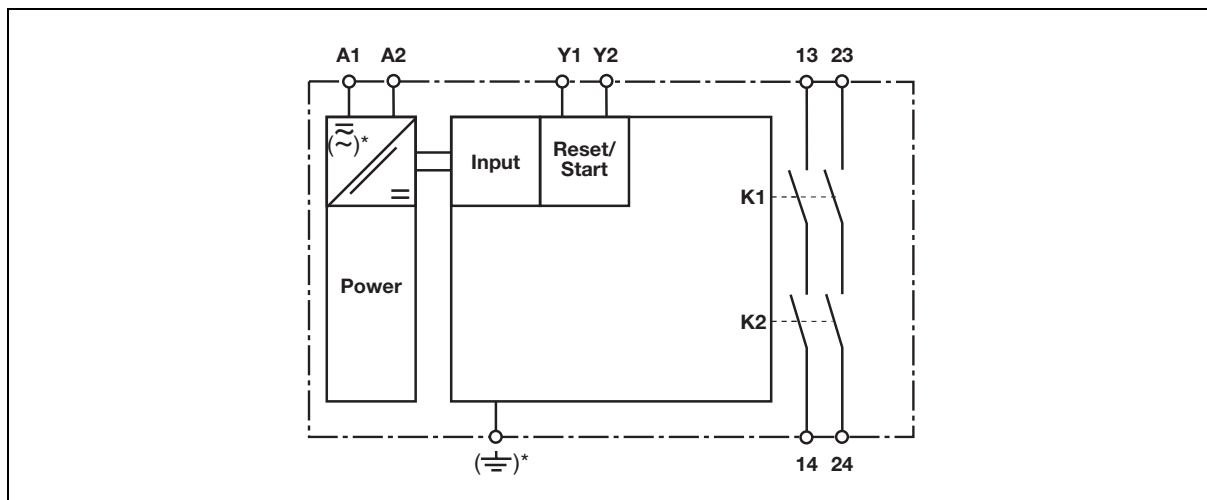




*Only when $U_B = 42 - 240 \text{ VAC}$

Galvanic isolation only when $U_B = 42 - 240 \text{ VAC}$


Up to Category 2, EN 954-1 PNOZ X7

▶ Key


S1	E-STOP pushbutton
S3	Reset button
	Switch operated
	Gate open
	Gate closed

Terminal configuration

$U_B = 24$ VAC/DC

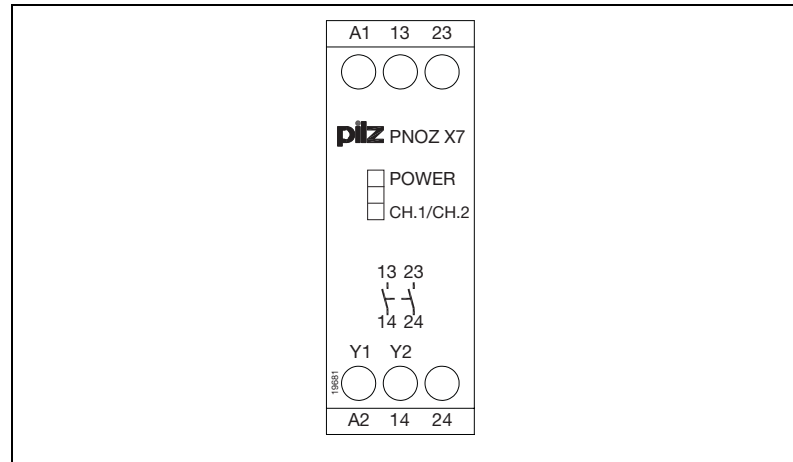


U_B AC

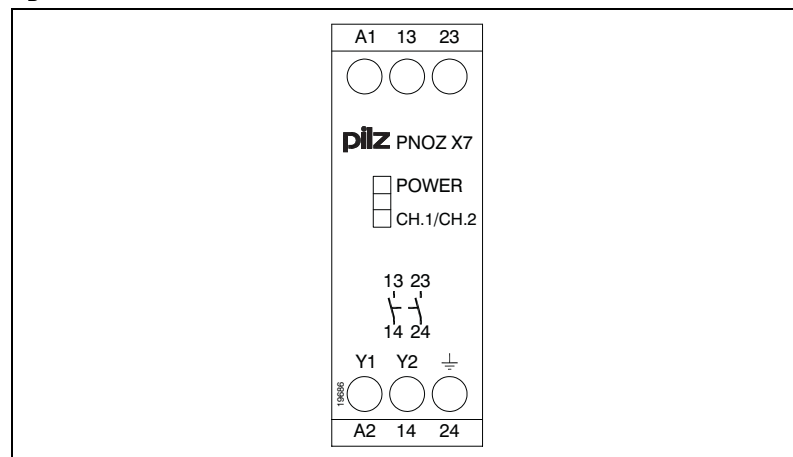

Installation

- ▶ The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- ▶ Use the notch on the rear of the unit to attach it to a DIN rail.
- ▶ Ensure the unit is mounted securely on a vertical DIN rail (35 mm) by using a fixing element (e.g. retaining bracket or an end angle).

Dimensions

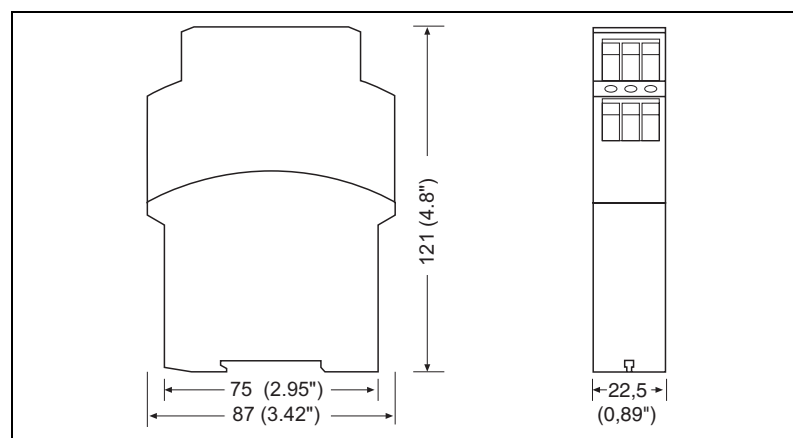


Up to Category 2, EN 954-1 PNOZ X1

Notice

This data sheet is only intended for use during configuration. For installation and operation, please refer to the operating instructions supplied with the unit.

Service life graph

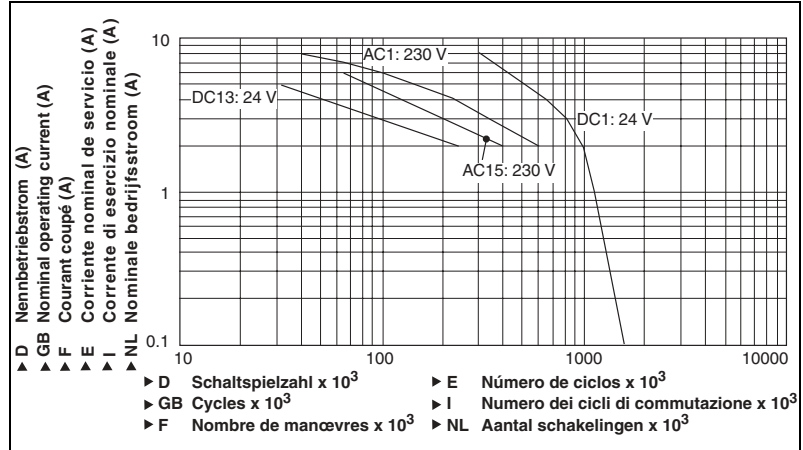

2.3

Technical details

Electrical data

Supply voltage	
Supply voltage U_B AC/DC	24 V
Voltage tolerance	-15 %/+10 %
Power consumption at U_B AC	3.5 VA
Power consumption at U_B DC	1.5 W
Frequency range AC	50 - 60 Hz
Residual ripple DC	160 %
Voltage and current at input circuit DC: 24.0 V	50.0 mA
reset circuit DC: 24.0 V	30.0 mA
feedback loop DC: 24.0 V	30.0 mA
Output contacts in accordance with EN 954-1 Category 2	Safety contacts (N/O): 3 Auxiliary contacts (N/C): 1
Utilisation category in accordance with EN 60947-4-1	
Safety contacts: AC1 at 240 V	I_{min} : 0.01 A , I_{max} : 6.00 A P_{max} : 1500 VA
Safety contacts: DC1 at 24 V	I_{min} : 0.01 A , I_{max} : 6.0 A P_{max} : 150 W
Auxiliary contacts: AC1 at 240 V	I_{min} : 0.01 A , I_{max} : 6.0 A P_{max} : 1500 VA
Auxiliary contacts: DC1 at 24 V	I_{min} : 0.01 A , I_{max} : 6.0 A P_{max} : 150 W
Utilisation category in accordance with EN 60947-5-1	
Safety contacts: AC15 at 230 V	I_{max} : 3.0 A
Safety contacts: DC13 at 24 V (6 cycles/min)	I_{max} : 4.0 A
Auxiliary contacts: AC15 at 230 V	I_{max} : 3.0 A
Auxiliary contacts: DC13 at 24 V (6 cycles/min)	I_{max} : 4.0 A
Contact material	AgSnO2 + 0.2 µm Au

Up to Category 2, EN 954-1

PNOZ X1

Electrical data

External contact fuse protection to **EN 60947-5-1**

Blow-out fuse, quick

Safety contacts: **6 A**

Auxiliary contacts: **6 A**

Blow-out fuse, slow

Safety contacts: **4 A**

Auxiliary contacts: **4 A**

Circuit breaker 24 VAC/DC, characteristic B/C

Safety contacts: **4 A**

Auxiliary contacts: **4 A**

Max. overall cable resistance R_{lmax}

input circuits, reset circuits

single-channel at U_B DC **30 Ohm**

single-channel at U_B AC **30 Ohm**

Times

Switch-on delay

with automatic reset typ. **60 ms**

with automatic reset max. **120 ms**

with manual reset typ. **60 ms**

with manual reset max. **150 ms**

Delay-on de-energisation

with E-STOP typ. **55 ms**

with E-STOP max. **90 ms**

with power failure typ. **55 ms**

with power failure max. **90 ms**

Recovery time at max. switching frequency 1/s

after E-STOP **150 ms**

after power failure **150 ms**

Supply interruption before de-energisation **10 ms**

Environmental data

EMC **EN 60947-5-1, EN 61000-6-2**

Vibration in accordance with **EN 60068-2-6**

Frequency **10 - 55 Hz**

Amplitude **0.35 mm**

Climatic suitability **EN 60068-2-78**

Airgap creepage **VDE 0110-1**

Ambient temperature **-10 - 55 °C**

Storage temperature **-40 - 85 °C**

Protection type

Mounting (e.g. control cabinet) **IP54**

Housing **IP40**

Terminals **IP20**

Mechanical data

Housing material

Housing **PPO UL 94 V0**

Front **ABS UL 94 V0**

Max. cross section of external conductors with screw terminals

1 core flexible **0.20 - 4.00 mm², 24 - 10 AWG**

2 core, same cross section, flexible:

with crimp connectors, without insulating sleeve **0.20 - 2.50 mm², 24 - 14 AWG**

without crimp connectors or with TWIN crimp connectors **0.20 - 2.50 mm², 24 - 14 AWG**

Torque setting with screw terminals **0.60 Nm**

Dimensions

Height **87.0 mm**

Width **22.5 mm**

Depth **121.0 mm**

Weight **185 g**

Up to Category 2, EN 954-1 PNOZ X1

The standards current on **09/04** apply.

Order reference

Type	Features		Terminals	Order no.
PNOZ X1	24 VAC	24 VDC	Screw terminals	774 300