

AccuProx™ Analog Inductive Proximity Sensors

Contents

Overview 3-37
 Model Selection, Sensors 3-39
 Model Selection, Compatible Connector Cables 3-39
 Wiring Diagrams 3-40
 Dimensions 3-40
 Specifications 3-41
 Performance Graphs 3-42

The Cutler-Hammer® AccuProx™ from Eaton’s electrical business is a high performance analog inductive proximity sensor. The AccuProx family of analog sensors provide unmatched sensing range, linearity and resolution in an affordable and compact tubular package.

Unlike standard inductive sensors, which send an open or close signal upon target presence or absence, AccuProx analog sensors provide an electrical signal that varies in proportion to the position of the metal target within its sensing range. This makes AccuProx ideal for applications requiring precise position sensing and measurement.


The sensing performance of AccuProx sets it apart from traditional analog inductive designs. Utilizing components from the cutting-edge Cutler-Hammer iProx™ family, AccuProx provides sensing ranges of three to four times that of typical tubular analog inductive sensors — all without compromising accuracy. Unlike many competitive products, which are often hampered by an “S-shaped” output curve, AccuProx outputs are linear.

AccuProx has the range and precision to solve your most difficult measurement applications.

Approvals

- C-UL Listed

Introducing a Long Range, High Precision Analog Inductive

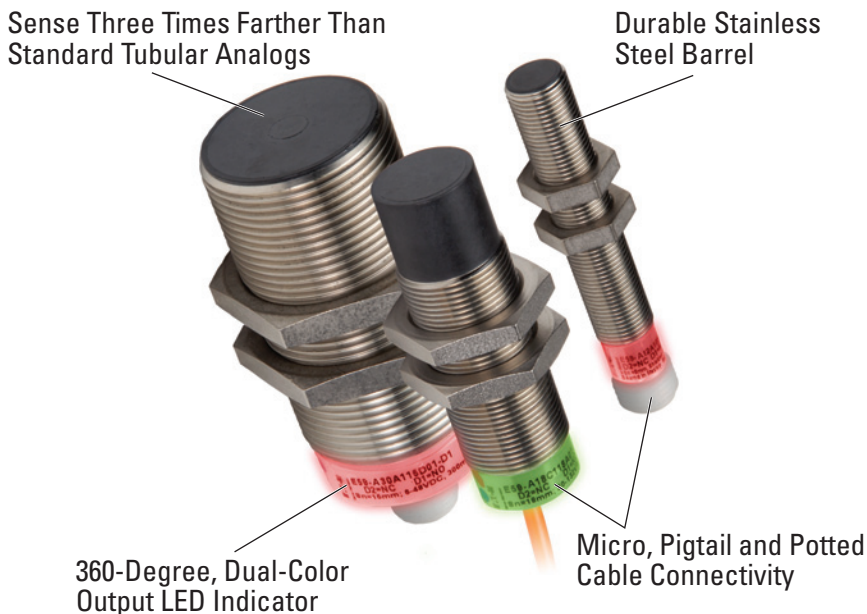

Product Features

- Extended linear sensing range of up to 25 millimeters — three times longer than standard tubular analog inductive sensors
- Outputs available in current (4 – 20 or 0 – 20 mA) and voltage (0 – 10V)
- High output resolution and repeatability for applications requiring precision sensing performance
- Robust stainless steel barrel, shock-resistant front cap, polycarbonate end bell and impact-absorbing potting compound
- Ideal for extreme temperature or high pressure washdown environments
- High noise immunity of 20V/m prevents many problems associated with electrical noise

Typical Applications

- Part positioning
- Distance, size and thickness measurement
- General inspection and error proofing, such as material imperfection or blemish detection
- Eccentricity or absolute angle detection
- Identification of different metals

Presenting AccuProx™ — Unmatched Analog Range in a Proven Package

Historically, analog sensors have been limited by very short sensing ranges — as little as one or two millimeters. By utilizing technology first perfected in the iProx™ family of digital inductive sensors, AccuProx can sense objects as far as 25 millimeters. This extended range can be achieved without making compromises often found in competitive products, such as reduced output accuracy.


AccuProx utilizes many of the proven materials found in other Cutler-Hammer tubular sensor families. The threaded barrel and included mounting nuts are made of stainless steel, which exhibits superior corrosion and abrasion resistance versus nickel-plated brass. AccuProx also features a proprietary internal potting compound that absorbs impacts and vibration while sealing out moisture. The materials used in the construction of AccuProx are time-tested and proven to work.

High Output Accuracy


Analog inductive sensors are often used in applications that require a higher level of precision than a standard digital sensor. For example, applications such as part inspection require a sensor that can detect very small variances. AccuProx has been designed with these applications in mind.

Output accuracy is determined by the repeat accuracy, linearity, resolution and response time of the sensor.

Repeat accuracy refers to the variations in sensing distance between successive sensor operations due to component tolerances, where all operating conditions are kept the same. The repeat accuracy of an 18 millimeter, unshielded AccuProx sensor is less than 20 micrometers. See the below chart for a repeat accuracy comparison of AccuProx versus the competition.

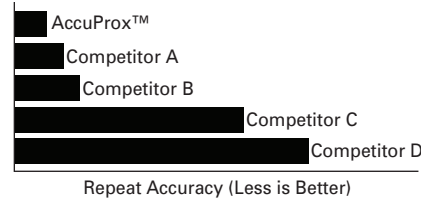


Linearity refers to the shape of the output curve. Many competitive analog sensors exhibit a wavy or “S-shaped” output curve. This means that a change in target distance may not always translate into an equivalent change in output, particularly at the innermost and outermost ranges of a non-linear analog sensor. AccuProx features a linear output. See the below diagram for an example of AccuProx versus a non-linear competitive offering.

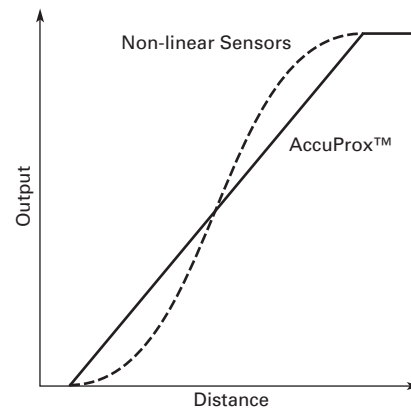

Resolution refers to the number of “steps” in the sensor output. A higher resolution is ideal because it will allow the sensor to detect smaller changes in target position.

An 18 millimeter, unshielded AccuProx features more than 350 output steps, ensuring consistent performance.


Typical Analog Applications




Material Imperfection or Blemish Detection



Eccentricity or Absolute Angle Detection






Saw Blade Deflection



Detecting Different Metals




Model Selection — AccuProx Analog

	Operating Voltage	Sensing Range	Shielding	Connection Type	Catalog Number	
					Current (0 – 20 mA) and Voltage (0 – 10V) Output ①	Current (4– 20 mA) Output Only ①
3/4-Wire Sensors						
12 mm Diameter 	15 – 30V DC	0.5 – 4 mm	Shielded	4-Pin Micro DC Connector	E59-A12A104D01-CV ☼	E59-A12A104D01-C1 ☼
				4-Pin Micro DC Pigtail	E59-A12A104D01P-CV ☼	E59-A12A104D01P-C1 ☼
				2-meter Cable	E59-A12A104C02-CV	E59-A12A104C02-C1
		1 – 8 mm	Unshielded	4-Pin Micro DC Connector	E59-A12C108D01-CV ☼	E59-A12C108D01-C1 ☼
				4-Pin Micro DC Pigtail	E59-A12C108D01P-CV ☼	E59-A12C108D01P-C1 ☼
				2-meter Cable	E59-A12C108C02-CV	E59-A12C108C02-C1
18 mm Diameter 	15 – 30V DC	1 – 7 mm	Shielded	4-Pin Micro DC Connector	E59-A18A107D01-CV ☼	E59-A18A107D01-C1 ☼
				4-Pin Micro DC Pigtail	E59-A18A107D01P-CV ☼	E59-A18A107D01P-C1 ☼
				2-meter Cable	E59-A18A107C02-CV	E59-A18A107C02-C1
		1 – 15 mm	Unshielded	4-Pin Micro DC Connector	E59-A18C115D01-CV ☼	E59-A18C115D01-C1 ☼
				4-Pin Micro DC Pigtail	E59-A18C115D01P-CV ☼	E59-A18C115D01P-C1 ☼
				2-meter Cable	E59-A18C115C02-CV	E59-A18C115C02-C1
30 mm Diameter 	15 – 30V DC	1 – 12 mm	Shielded	4-Pin Micro DC Connector	E59-A30A112D01-CV ☼	E59-A30A112D01-C1 ☼
				4-Pin Micro DC Pigtail	E59-A30A112D01P-CV ☼	E59-A30A112D01P-C1 ☼
				2-meter Cable	E59-A30A112C02-CV	E59-A30A112C02-C1
		1 – 25 mm	Unshielded	4-Pin Micro DC Connector	E59-A30C125D01-CV ☼	E59-A30C125D01-C1 ☼
				4-Pin Micro DC Pigtail	E59-A30C125D01P-CV ☼	E59-A30C125D01P-C1 ☼
				2-meter Cable	E59-A30C125C02-CV	E59-A30C125C02-C1

① Models available in custom output configurations (e.g. 1 – 5V, 0 – 5V). Contact factory for details.

☼ See listing of compatible connector cables below.

Model Selection — Compatible Connector Cables ②

	Voltage Style	Number of Pins	Gauge	Length	Catalog Number			Pin Configuration/Wire Colors (Face View Female Shown)
					PVC Jacket	PUR Jacket	IRR PUR Jacket	
Standard Cables — Micro Style								
Micro Style Straight Female 	DC	4-pin 3-wire	22 AWG	6.0 feet (2m)	CSDS4A3CY2202	CSDS4A3RY2202	—	 1-Brown 2-No Wire 3-Blue 4-Black
	DC	4-pin 4-wire	22 AWG	6.0 feet (2m)	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4IO2202	 1-Brown 2-White 3-Blue 4-Black

② For a full selection of connector cables, see **Section 10**.

■ Stocked product, typical order quantities guaranteed in stock.


Wiring Diagrams (Pin numbers are for reference, rely on pin location when wiring)

Style	Output(s)	Micro-Connector Models	Cable and Pigtail Models
12 mm Diameter Models Ending in -C1 ①	Current: 4 – 20 mA		
18 and 30 mm Diameter Models Ending in -C1 ①			
Models Ending in -CV	Current: 0 – 20 mA Voltage: 0 – 10V		


① For models ending in -C1 (current output only models), pins 2 and 4 are intentionally connected. **Note:** Do not connect outputs of -C1 models to separate loads — this sensor should only be connected to a single-output load.

Approximate Dimensions — AccuProx Analog in Inches (mm)

Micro-Connector Models

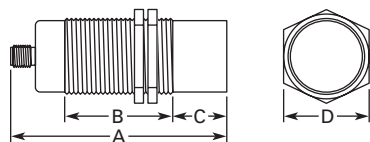

Cable and Pigtail Models

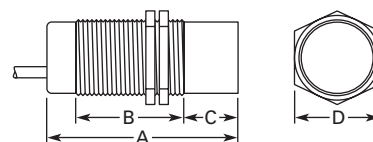

Micro-Connector Models

Size	Shielding	A	B	C	D
12 mm	Shielded	3.05 (77.5)	1.98 (50.3)	0.02 (0.50)	0.67 (17)
	Unshielded	3.05 (77.5)	1.64 (41.6)	0.36 (9)	0.67 (17)
18 mm	Shielded	2.73 (69.3)	2.00 (50.9)	0.02 (0.50)	0.94 (24)
	Unshielded	2.73 (69.3)	1.47 (37.4)	0.55 (14)	0.94 (24)
30 mm	Shielded	2.92 (74.1)	2.13 (54.1)	0.03 (0.75)	1.41 (36)
	Unshielded	2.92 (74.1)	1.41 (35.8)	0.75 (19)	1.41 (36)

Cable and Pigtail Models

Size	Shielding	A	B	C	D
12 mm	Shielded	2.46 (62.4)	1.98 (50.3)	0.02 (0.5)	0.67 (17)
	Unshielded	2.46 (62.4)	1.64 (41.6)	0.36 (9)	0.67 (17)
18 mm	Shielded	2.54 (64.5)	2.00 (50.9)	0.02 (0.5)	0.94 (24)
	Unshielded	2.54 (64.5)	1.47 (37.4)	0.55 (14)	0.94 (24)
30 mm	Shielded	2.74 (69.6)	2.13 (54.1)	0.03 (0.75)	1.41 (36)
	Unshielded	2.74 (69.6)	1.41 (35.8)	0.75 (19)	1.41 (36)

Specifications — AccuProx Analog

Description	12 mm Models		18 mm Models		30 mm Models	
	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded

Performance

Analog Operating Range	0.5 – 4 mm	1 – 8 mm	1 – 7 mm	1 – 15 mm	1 – 12 mm	1 – 25 mm
Temperature Range	-40° to 158°F (-40° to 70°C)					
Temperature Drift	< ± 10%					
Conformity	< ± 10%					
Repeat Accuracy	< 25 µm ①	< 20 µm ①	< 40 µm ①	< 20 µm ①	< 50 µm ①	< 30 µm ①
Minimum Repeat Accuracy	< 3.0% @ max. range	< 1.1% @ max. range	< 2.2% @ max. range	< 1.2% @ max. range	< 1.2% @ max. range	< 0.8% @ max. range
Recovery Time	< 1.0 mS	< 1.1 mS	< 1.5 mS	< 2.0 mS	< 2.0 mS	< 3.0 mS
Response Time	200 Hz	100 Hz	200 Hz	100 Hz	140 Hz	100 Hz
Linearity Tolerance	< ± 1.0% of full scale					
Resolution	23 µm max.	16 µm max.	40 µm max.	21 µm max.	50 µm max.	30 µm max.

Electrical

Style	AccuProx™ Analog, 3/4-Wire DC					
Operating Voltage	15 – 30V DC					
Current Output Signal	0 – 20 mA or 4 – 20 mA by model					
Current Output Load Resistance	400 – 500 ohm					
Current Output Ripple Content	± 40 µA max.					
Current Output Minimum Change	30 µA	20 µA	50 µA	28 µA	66 µA	40 µA
Voltage Output Signal ②	0 – 10 V					
Voltage Output Load Resistance	4.7 – 5.0 kOhm (2.5 mA max.)					
Voltage Output Ripple Content	± 10 mV max.					
Voltage Output Minimum Change	15 mV	10 mV	25 mV	14 mV	33 mV	20 mV
Burden Current	< 20 mA					
Output LED	Dual-color, 360° viewable					
Short Circuit Protection	Incorporated ③					
Wire Breakage Protection	Incorporated					
Reverse Polarity Protection	Incorporated					

Physical

Size	See dimension drawings on Page 3-40					
Enclosure Protection	NEMA 4, 4X, 6, 6P, 13					
Shock	30 g half-sine @ 11 mS					
Vibration	10 – 55 Hz, 1 mm amplitude					
Housing Material	Stainless steel, Polycarbonate endbell, Polyphenylene sulfide front cap					
Termination	Micro connector Potted cable, 2 m Pigtail micro connector, 2 m					

① The sensor achieves its maximum repeat accuracy after warming up for a period of at least one hour.

② Voltage outputs available on models ending in **-CV**.

③ Continuous short-circuits can exceed power dissipation ratings and cause eventual destruction.