

Demonstration board user guidelines for the STC3100 battery monitor for gas gauge applications


Introduction

This application note describes the STEVAL-ISB009V1, a demonstration board specifically designed for the STC3100 integrated circuit.

The document provides:

- a brief description of the STC3100 device.
- a description of the demonstration board.
- a detailed bill of materials for the demonstration board.
- the layout of the demonstration board.

Figure 1. Demonstration board

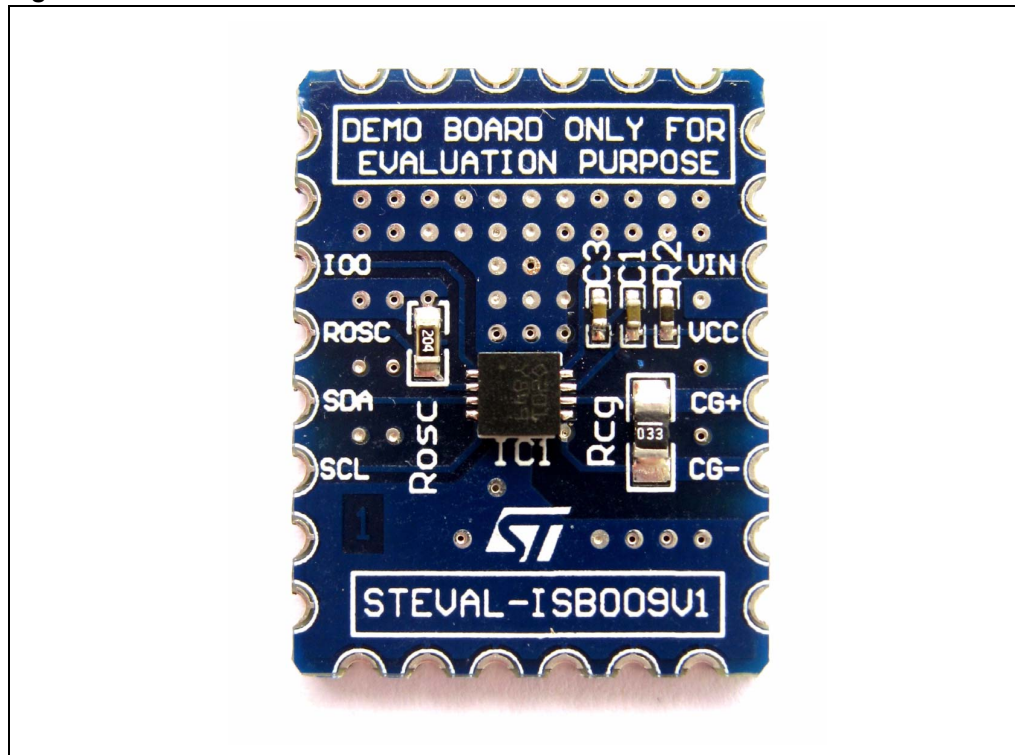

1 About the STC3100

The STC3100 monitors the three main battery parameters: voltage, current and temperature, and includes a Coulomb counter to keep track of the charge/discharge status.

1.1 Features

- Accurate battery voltage measurement
- Coulomb counter to keep track of the battery's state-of-charge
- Internal temperature sensor
- Internal or external 32 kHz timebase
- I2C interface for battery monitoring and device control

1.2 Performances:


- 0.5% battery voltage accuracy
- 1% Coulomb counter accuracy using an external RTC signal (3.5% using the internal timebase).
- Low power consumption: 100 μ A in operating conditions, 2 μ A in standby mode.

1.3 Packages

- DFN8 3 x 3 (as used in the demonstration board)
- MiniSO-8

Refer to the STC3100 datasheet for more detailed information on the device.

Figure 2. Typical application diagram for the STC3100

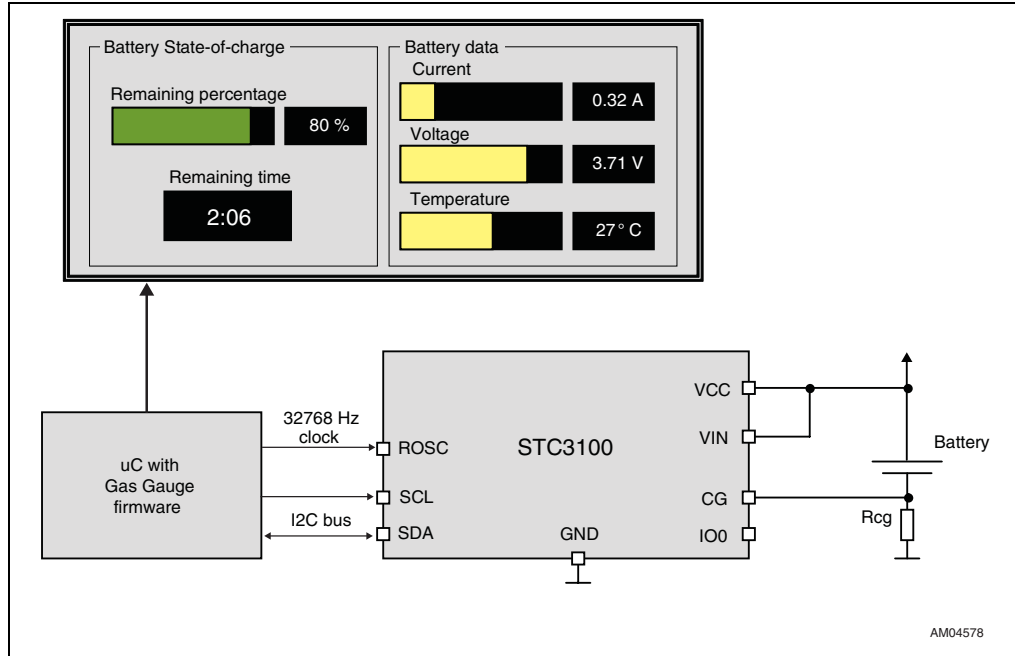

AM04578

2 Demonstration board description

The STEVAL-ISB009V1 is a demonstration board designed to help you evaluate the performance of the STC3100.

Figure 3. Demonstration board schematic diagram

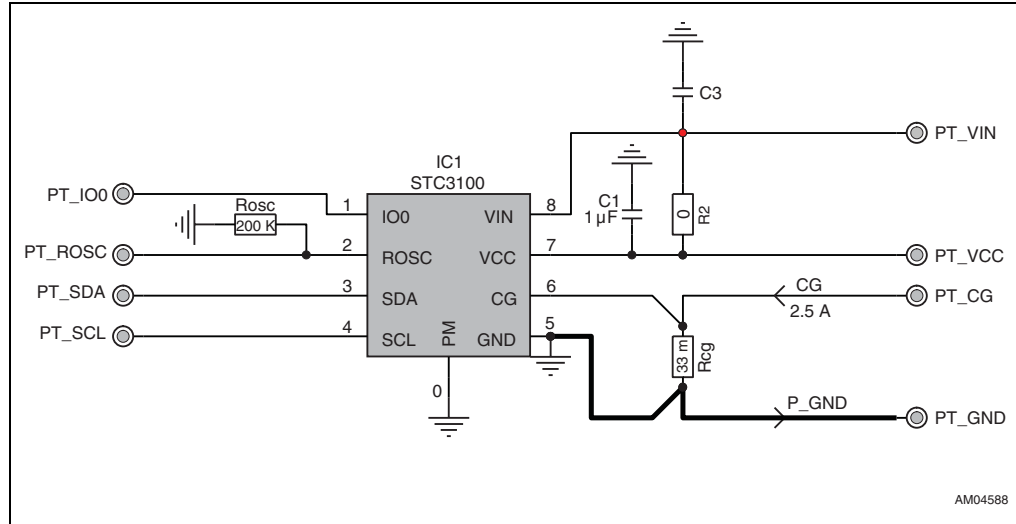



Table 1. Bill of materials

Part	Part type	Footprint	Description
IC1	STC3100IQT	DFN8 3x3	Battery monitoring integrated circuit from STMicroelectronics
Rosc	200 kΩ/0.1%	0603	Oscillator resistor
Rcg	33 mΩ/1%	0805	Shunt resistor
R2	0 Ω	0402	Strap
C1	1 μF/10 V/X7R	0402	Decoupling capacitor
C3	1 μF/10 V/X7R	0402	Optional filtering capacitor

4 Demonstration board connections

The STC3100 demonstration board can be simply connected to a battery and interfaced with a digital controller as shown in [Figure 6](#).

Figure 6. Demonstration board connections with battery and microcontroller

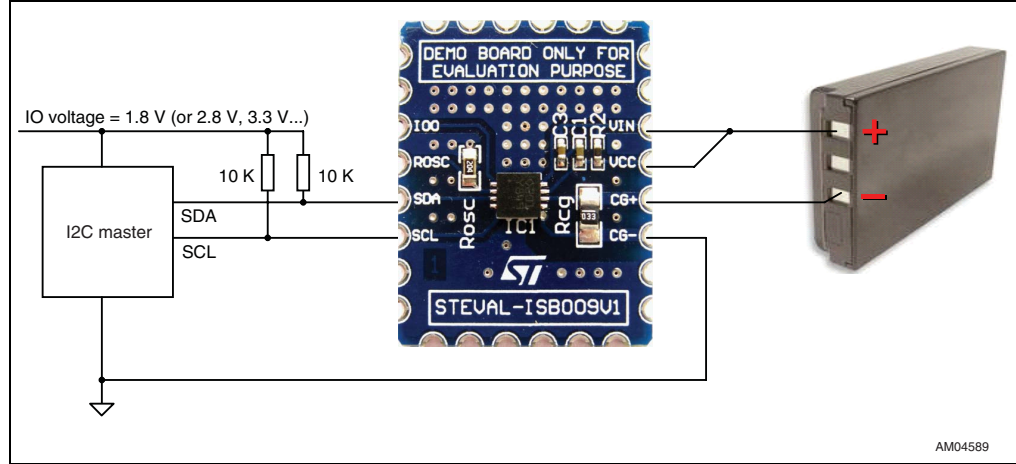

AM04589

5 Conclusion

To order the board online, go to http://www.st.com/stonline/domains/buy/buy_dev.htm and use the order code STEVAL-ISB009V1.

6 Revision history

Table 2. Document revision history

Date	Revision	Changes
08-Oct-2009	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

