



NPN SILICON RF TWIN TRANSISTOR

μ PA828TD

NPN SILICON RF TRANSISTOR (WITH 2 ELEMENTS) IN A 6-PIN LEAD-LESS MINIMOLD (M16, 1208 PKG)

FEATURES

- Built-in low phase distortion transistor suited for OSC applications
 $f_T = 9.0$ GHz TYP., $|S_{21e}|^2 = 7.5$ dB TYP. @ $V_{CE} = 1$ V, $I_c = 10$ mA, $f = 2$ GHz
NF = 1.3 dB TYP. @ $V_{CE} = 1$ V, $I_c = 3$ mA, $f = 2$ GHz
- Built-in 2 transistors (2 \times NE687)
- 6-pin lead-less minimold (M16, 1208 PKG)

BUILT-IN TRANSISTORS

| | |
|-----------------------------------------------|--------|
| | Q1, Q2 |
| 3-pin thin-type ultra super minimold part No. | NE687 |

<R>

ORDERING INFORMATION

| Part Number | Order Number | Package | Quantity | Supplying Form |
|------------------|--------------------|-------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------|
| μ PA828TD | μ PA828TD-A | 6-pin lead-less minimold (M16, 1208 PKG) (Pb-Free) | 50 pcs (Non reel) | • 8 mm wide embossed taping • Pin 1 (Q1 Collector), Pin 6 (Q1 Base) face the perforation side of the tape |
| μ PA828TD-T3 | μ PA828TD-T3-A | | 10 kpcs/reel | |

Remark To order evaluation samples, contact your nearby sales office.
The unit sample quantity is 50 pcs.

Caution Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C)

| Parameter | Symbol | Ratings | Unit |
|------------------------------|----------------------------------|-------------------|------|
| Collector to Base Voltage | V _{CB0} | 5.0 | V |
| Collector to Emitter Voltage | V _{CEO} | 3.0 | V |
| Emitter to Base Voltage | V _{EBO} | 2 | V |
| Collector Current | I _c | 30 | mA |
| Total Power Dissipation | P _{tot} ^{Note} | 90 in 1 element | mW |
| | | 180 in 2 elements | |
| Junction Temperature | T _j | 150 | °C |
| Storage Temperature | T _{stg} | -65 to +150 | °C |

Note Mounted on 1.08 cm² × 1.0 mm (t) glass epoxy PCB

ELECTRICAL CHARACTERISTICS (T_A = +25°C)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|------------------------------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| DC Characteristics | | | | | | |
| Collector Cut-off Current | I _{CB0} | V _{CB} = 5 V, I _E = 0 mA | – | – | 100 | nA |
| Emitter Cut-off Current | I _{EBO} | V _{EB} = 1 V, I _C = 0 mA | – | – | 100 | nA |
| DC Current Gain | h _{FE} ^{Note 1} | V _{CE} = 2 V, I _C = 20 mA | 70 | – | 140 | – |
| RF Characteristics | | | | | | |
| Gain Bandwidth Product (1) | f _T | V _{CE} = 1 V, I _C = 10 mA, f = 2 GHz | 7.0 | 9.0 | – | GHz |
| Gain Bandwidth Product (2) | f _T | V _{CE} = 2 V, I _C = 20 mA, f = 2 GHz | 9.0 | 11.0 | – | GHz |
| Insertion Power Gain (1) | S _{21e} ² | V _{CE} = 1 V, I _C = 10 mA, f = 2 GHz | 6.0 | 7.5 | – | dB |
| Insertion Power Gain (2) | S _{21e} ² | V _{CE} = 2 V, I _C = 20 mA, f = 2 GHz | 7.0 | 8.5 | – | dB |
| Noise Figure (1) | NF | V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz, Z _S = Z _{opt} | – | 1.3 | 2.0 | dB |
| Noise Figure (2) | NF | V _{CE} = 2 V, I _C = 3 mA, f = 2 GHz, Z _S = Z _{opt} | – | 1.3 | 2.0 | dB |
| Reverse Transfer Capacitance | C _{re} ^{Note 2} | V _{CB} = 2 V, I _E = 0 mA, f = 1 MHz | – | 0.4 | 0.8 | pF |
| h _{FE} Ratio | h _{FE1} /h _{FE2} | V _{CE} = 2 V, I _C = 20 mA, h _{FE1} : Smaller value of Q1 and Q2, h _{FE2} : Larger value of Q1 and Q2 | 0.85 | – | – | – |

Notes 1. Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2%


2. Collector to base capacitance when the emitter grounded.

h_{FE} CLASSIFICATION


| | |
|-----------------------|-----------|
| Rank | FB |
| Marking | kL |
| h _{FE} Value | 70 to 140 |

<R> TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise specified)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

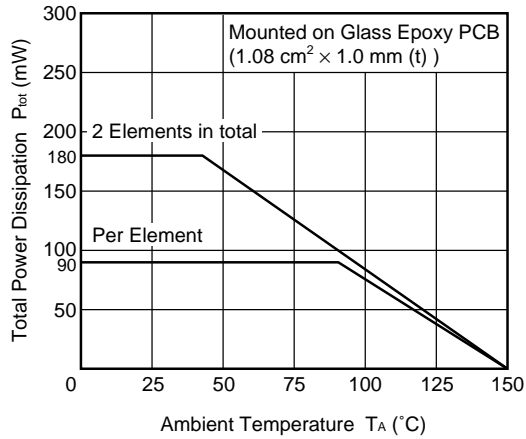


REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

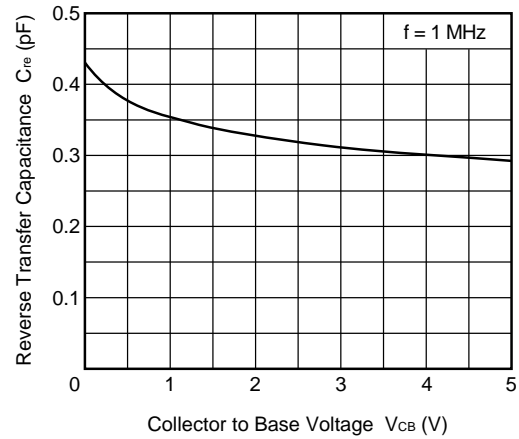


COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

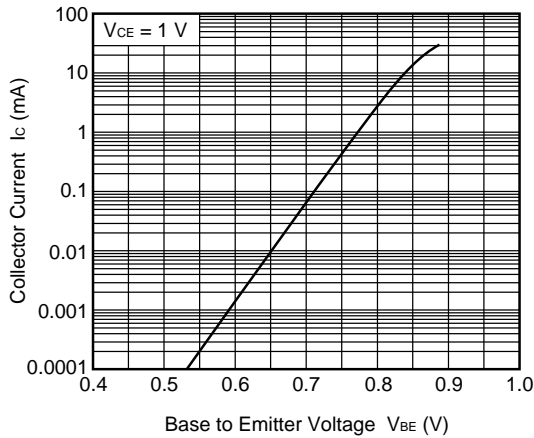

COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

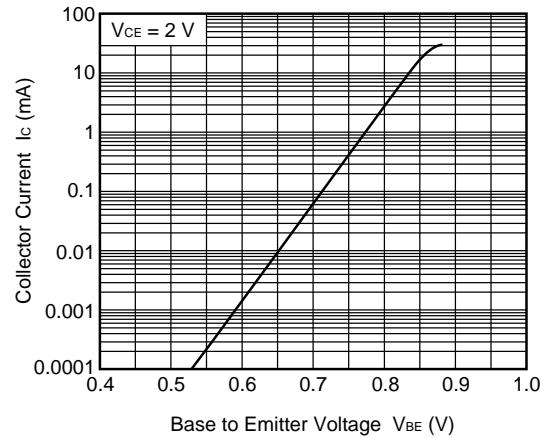


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

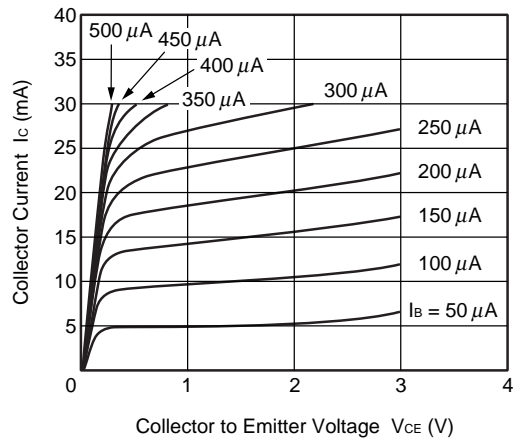


Remark The graphs indicate nominal characteristics.


DC CURRENT GAIN vs. COLLECTOR CURRENT

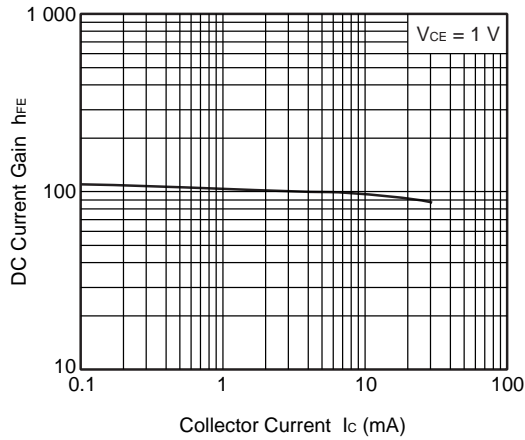


DC CURRENT GAIN vs. COLLECTOR CURRENT

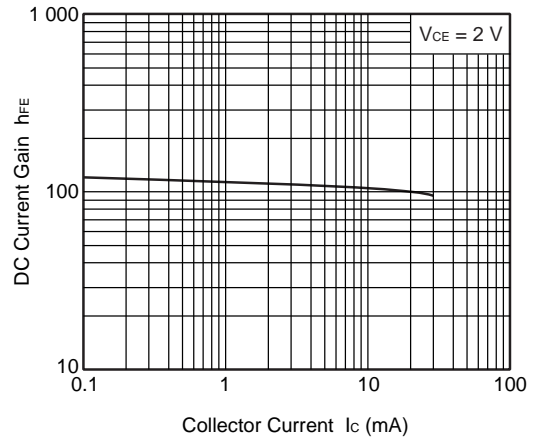


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

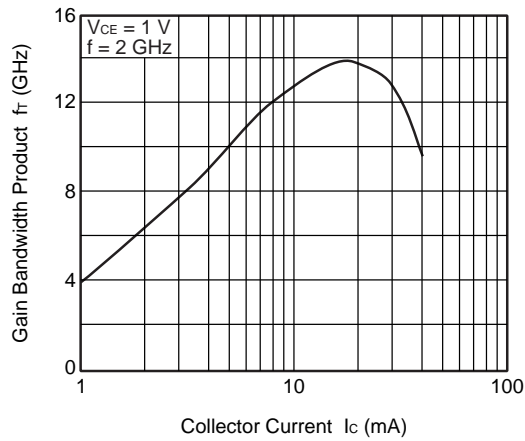


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

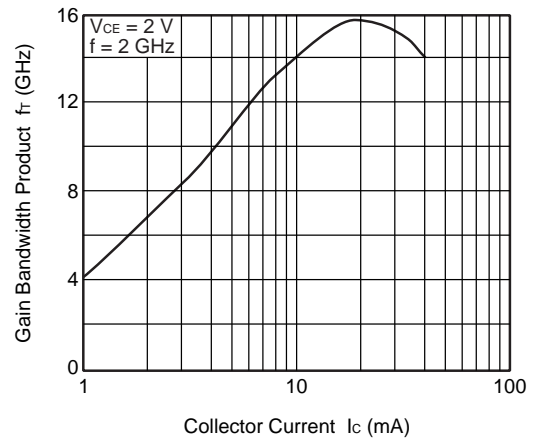







INSERTION POWER GAIN, MAG, MSG vs. FREQUENCY

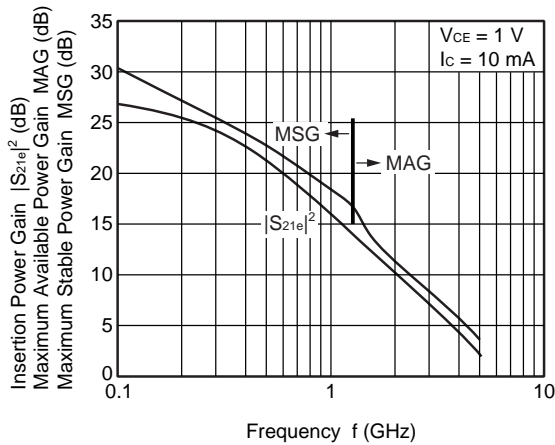

INSERTION POWER GAIN, MAG, MSG vs. FREQUENCY

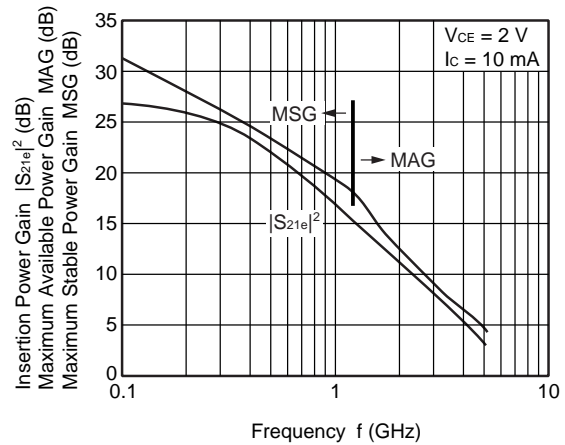


Remark The graphs indicate nominal characteristics.

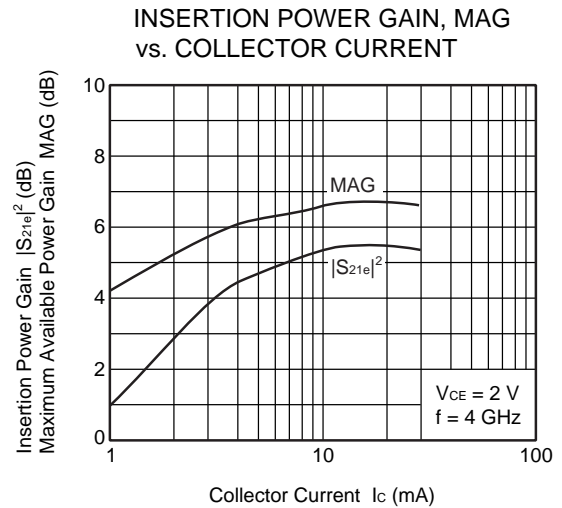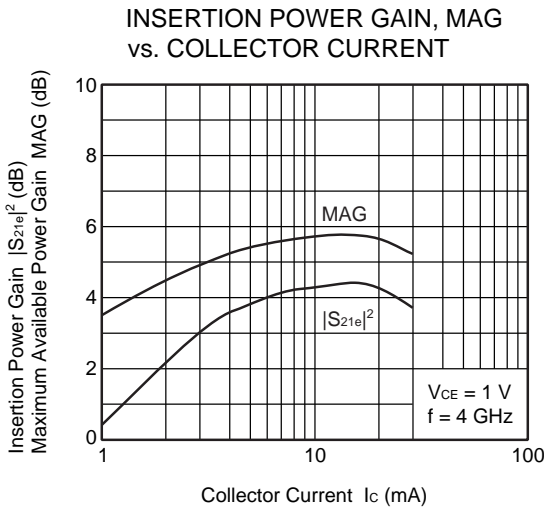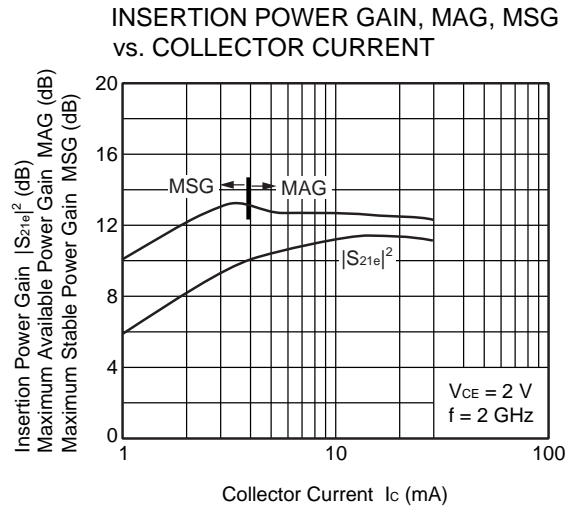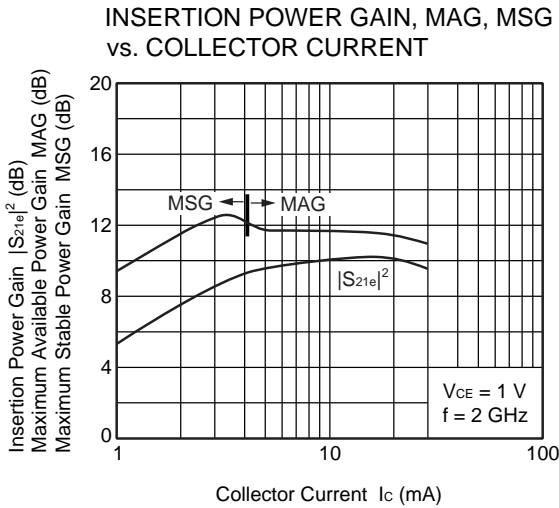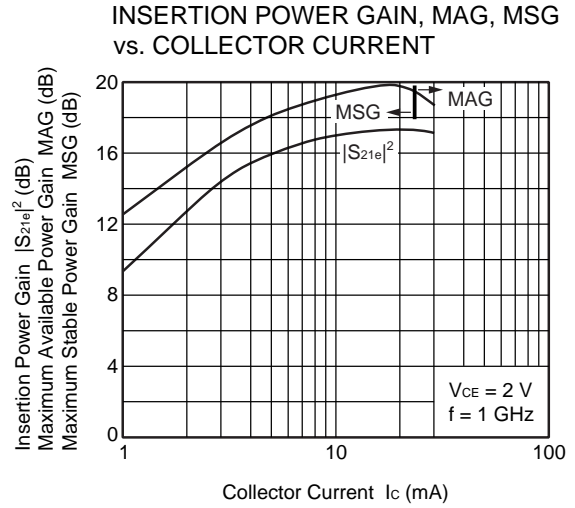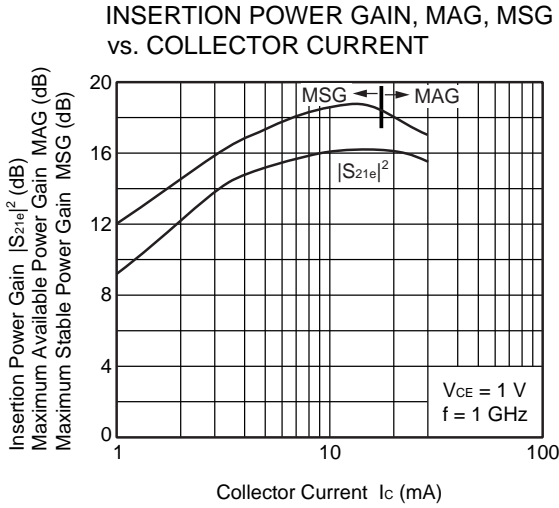


Remark The graphs indicate nominal characteristics.


NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

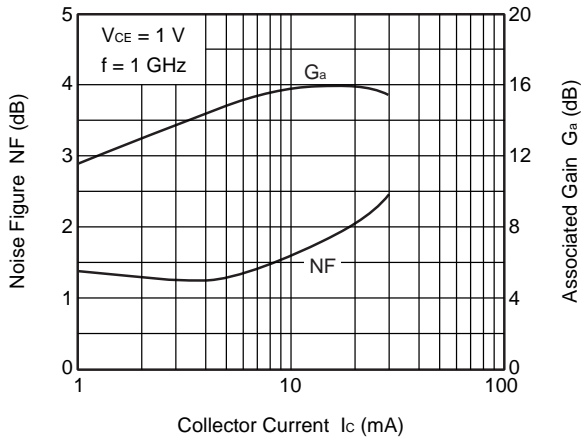


NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

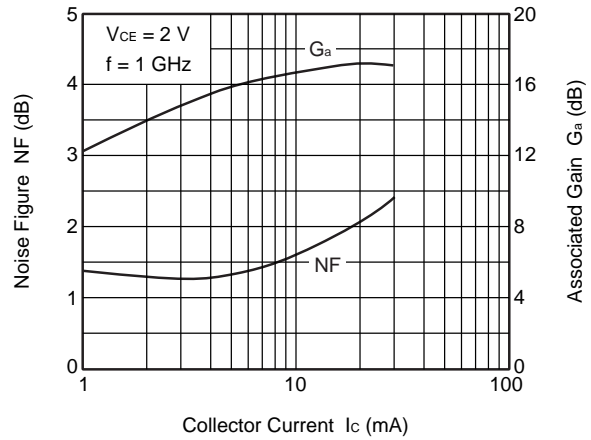


NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

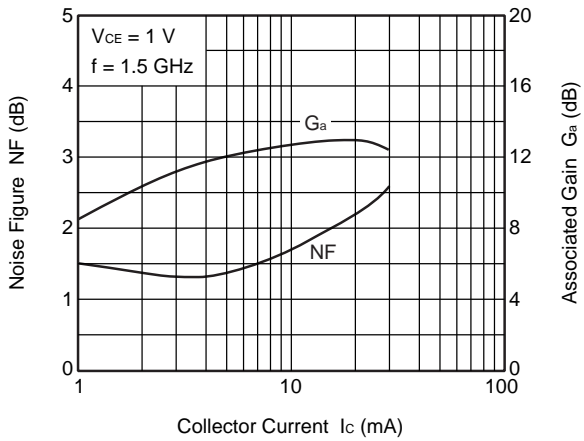


NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

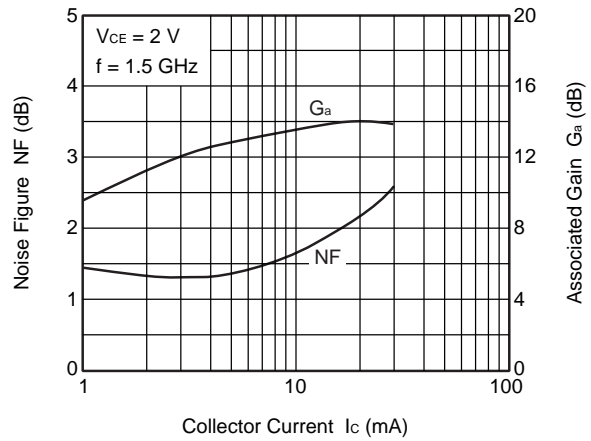

NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

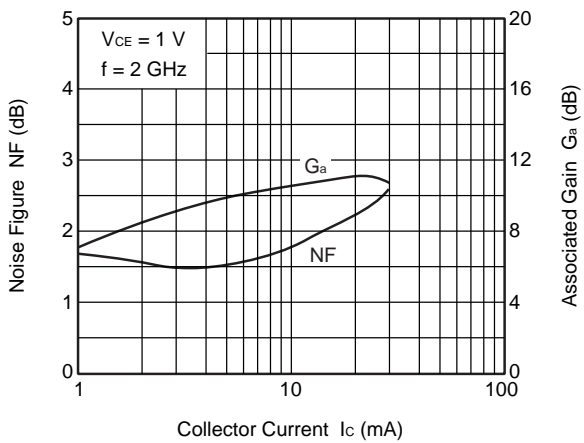



NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

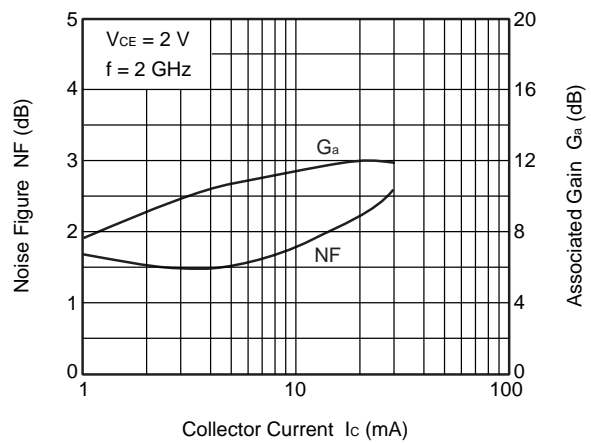


Remark The graphs indicate nominal characteristics.

PACKAGE DIMENSIONS

6-PIN LEAD-LESS MINIMOLD (M16, 1208 PKG) (UNIT: mm)

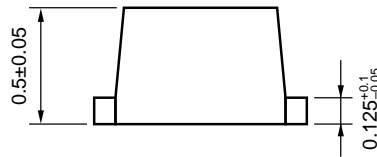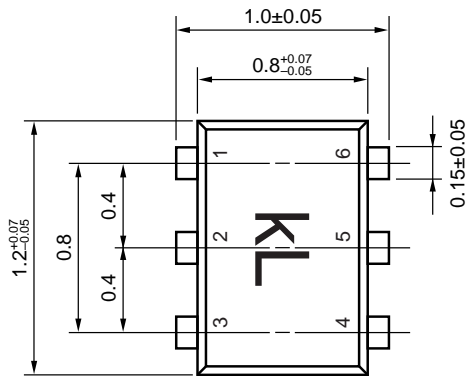

(Top View)



PIN CONNECTIONS

- 1. Collector (Q1)
- 2. Emitter (Q1)
- 3. Collector (Q2)
- 4. Base (Q2)
- 5. Emitter (Q2)
- 6. Base (Q1)

• **The information in this document is current as of February, 2008. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**

- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).