

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	P/N:LNJ818C8SRA1	TEMPORARY
		T. Tabata			

T Y P E	Soft Orange Light Emitting Diode					
A P P L I C A T I O N	Indicators					
M A T E R I A L	GaAsP					
O U T L I N E	Attached					
A B S O L U T E	P	#1 I _{FP}	I _{FDC}	V _R	Topr	Tstg
M A X I M U M	60	60	20	3	-30~+85	-40~+100
R A T I N G S	mW	mA	mA	V	°C	°C
C O N D I T I O N	Ta=25±3°C					


Test Specification

I t e m	Symbol	C o n d i t i o n	Typ	Limit		Unit
				Min	Max	
Forward Voltage	V _F	I _F =10mA	1.93		2.6	V
Reverse Leakage Current	I _R	V _R = 3V			10	μA
Luminous Intensity #2	I _O	I _F =10mA DC	2.5	1.3		mcd
Peak Emission Wavelength	λ _p	I _F =10mA DC	610			nm
Spectral Line Half Width	Δλ	I _F =10mA DC	40			nm

- #1. The Condition of I_{FP} is duty 10%, Pulse width 1 ms
- #2. Tolerance of luminous intensity: ±20%.

NOTE





- ★1. Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.
- ★2. Soldering conditions...Refer to Handling note.
- ★3. Compositions of the lead ... Cu/Ni/Au plating
- ★4. Circuit to operate LED.

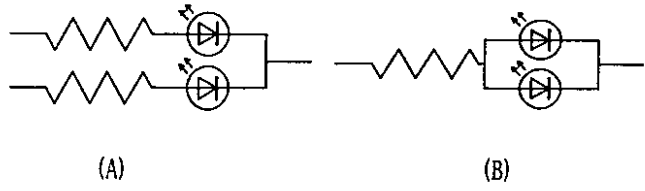

(A) Recommended circuit.
 (B) The difference of brightness between the LED could be found due to the V_F characteristics of each LED.

Oct. 24. 2001			


Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
		T. Tabata		

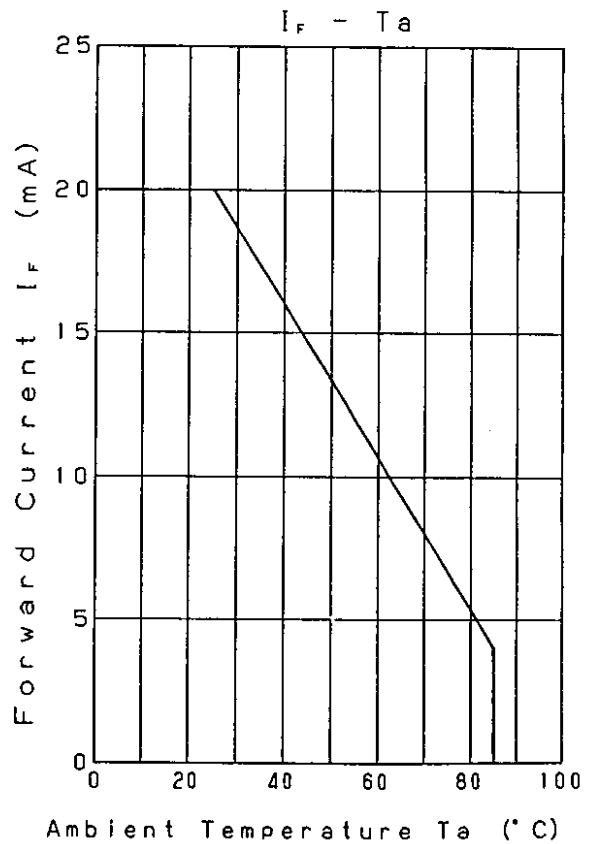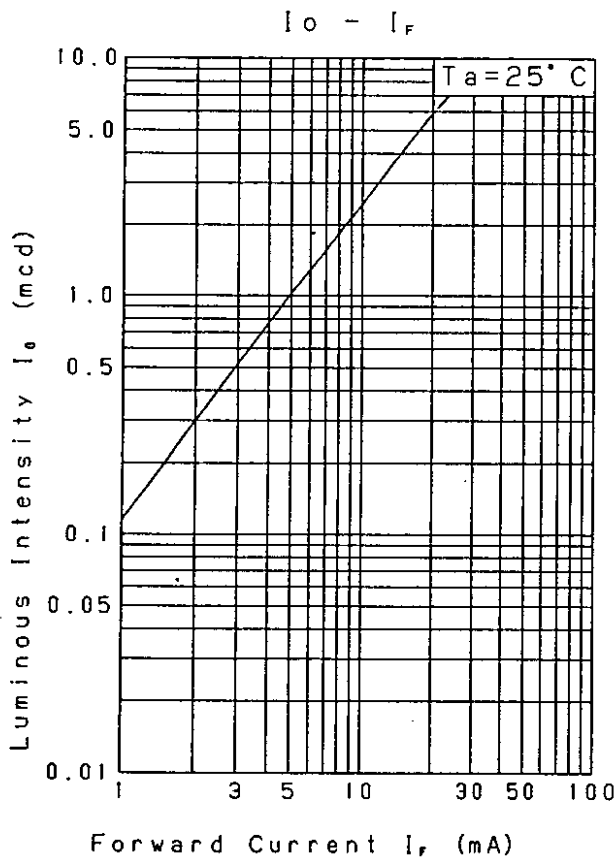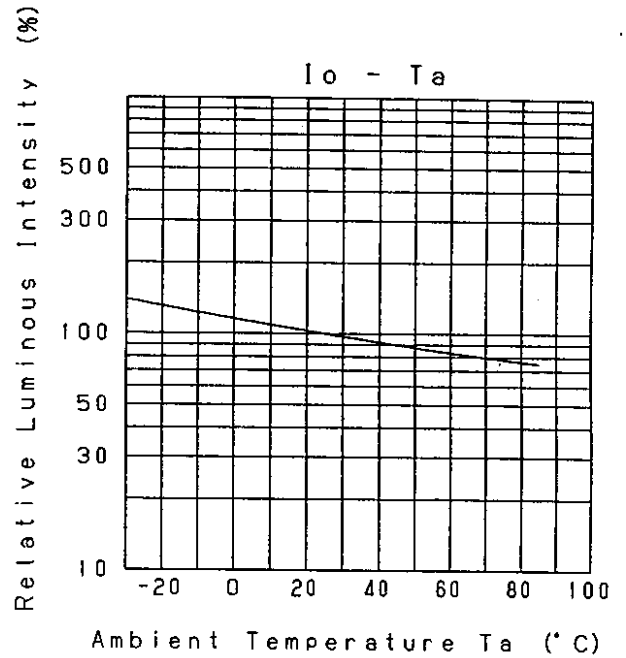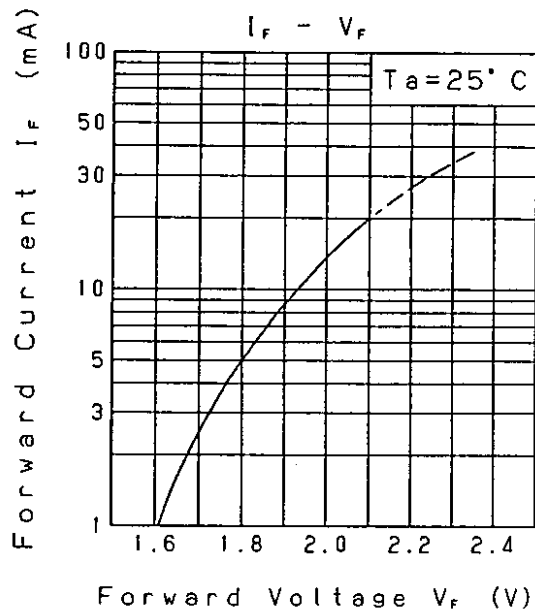


Nov. 7. 2001			
--------------	--	--	--

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
		T. Tabata		


Relative Luminous Intensity
Wavelength Characteristics

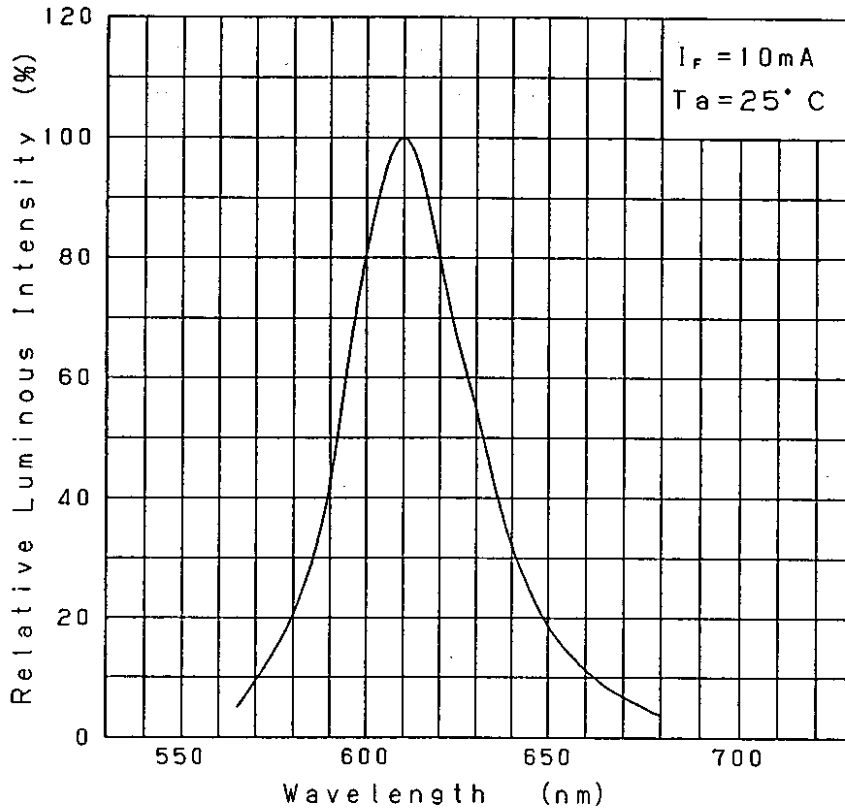

Directive Characteristics

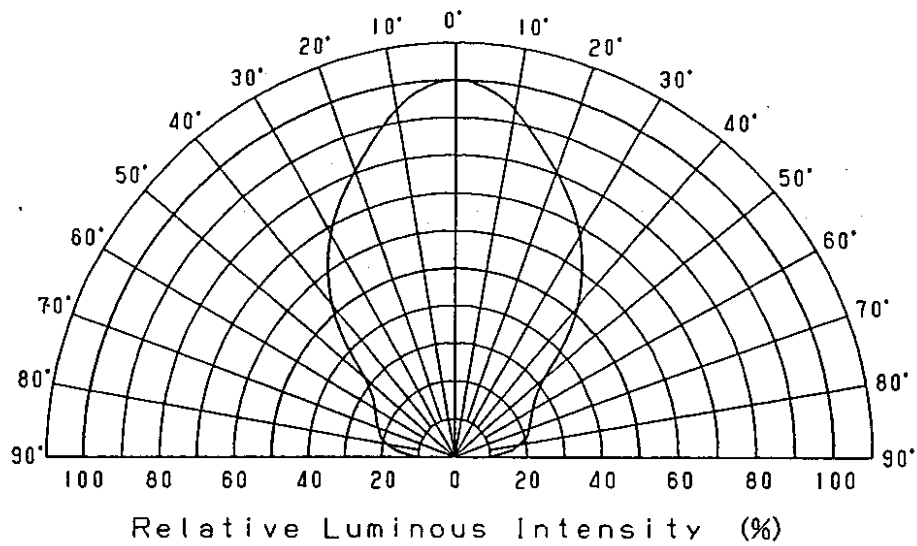

Nov. 7. 2001		

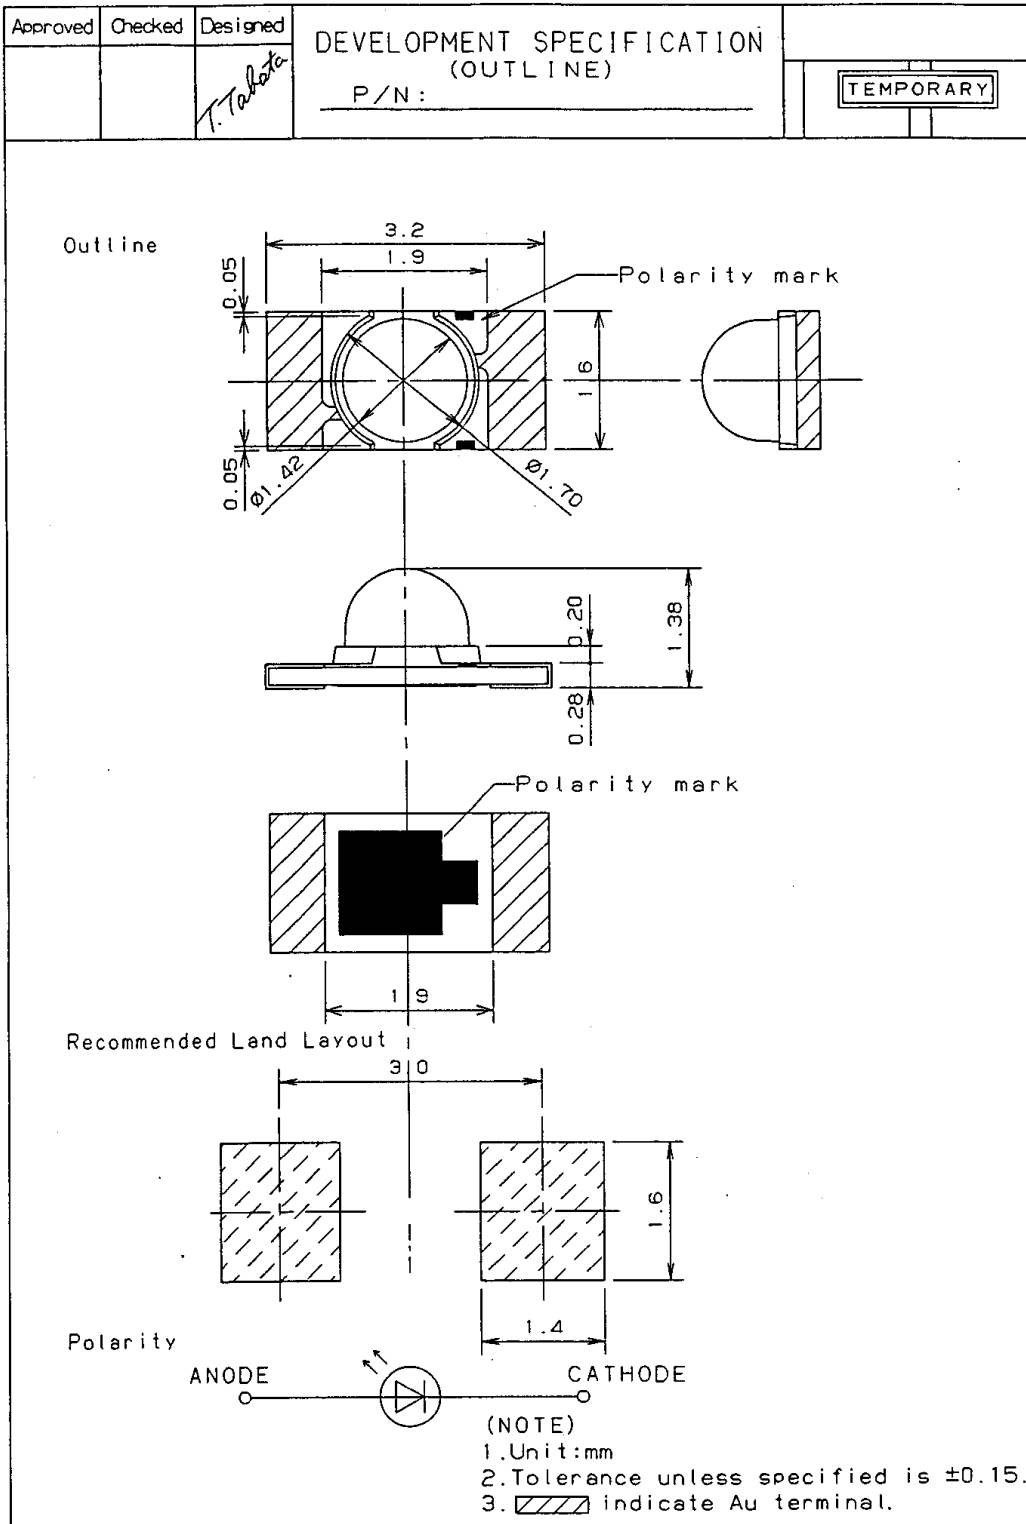

Nov. 7. 2001			
--------------	--	--	--

Panasonic KAGOSHIMA MATSUSHITA ELECTRONICS CO., LTD. KB-H-022-018B