



### CSNR151



Actual product appearance may vary.

**CSN Series closed loop current sensor, measures ac, dc or impulse current, 125 A nominal,  $\pm 200$  amp range, center pin, 2000 turn**

#### Features

- Current sensing up to 1275 amps (depending on product listing)
- Measures ac, dc and impulse currents
- Competitive cost/performance ratio
- Rapid response
- High overload capability
- High level of electrical isolation between primary and secondary circuits
- Industrial operating temperature range
- Small size and weight

#### Potential Applications

- Variable speed drives
- Overcurrent protection
- Ground fault detectors
- Current feedback control systems
- Robotics
- UPS and telecommunication power supplies
- Welding power supplies
- Automotive - Battery management systems
- Wattmeters


#### Description

The CSN Series of closed loop current sensors are based on the principles of the Magnetoresistive or Hall effects, and the null balance or zero magnetic flux method (feedback system). The magnetic flux in the sensor core is constantly controlled at zero. The amount of current required to balance zero flux is the measure of the primary current flowing through the conductor, multiplied by the ratio of the primary to secondary windings. This closed loop current is the output from the device and presents an image of the primary current reduced by the number of secondary turns at any time. This current can be expressed as a voltage by passing it through a resistor.

Product Specifications	
Product Type	Closed Loop Linear
Sensed Current Type	ac or dc
Sensed Current Range	$\pm 200$ A
Package Style	Thru Hole PCB Mount
Output Type	Current
Maximum Continuous Current	$\pm 200$ A
Nominal Operate Current @ 25 °C	125 A RMS
Supply Current	$\pm 14$ mA + output


Supply Voltage	±12.0 Vdc to ±15.0 Vdc
Offset Current	< ±0.1 mA
Offset Current Drift	< ±0.3 mA
Coil Resistance @ 25 °C	100 Ohm
Response Time	< 0.5 µs
Coil Turns	2000
Output Nominal	62.5 mA
Operating Temperature Range	-40 °C to 85 °C [-40 °F to 185 °F]
Storage Temperature Range	-40 °C to 90 °C [-40 °F to 194 °F]
Minimum Measuring Resistance	10 Ohm
Maximum Measuring Resistance	100 Ohm
Housing Material	Glass-filled PBT (UL94-V0)
Mounting	PCB on 3 pins
Pinout Style	Center
Accuracy	±0.5 %
Availability	Global
Comment	Larger thru hole.
UNSPSC Code	411121
UNSPSC Commodity	411121 Transducers
Series Name	CSN

Honeywell		100/125A NULL BALANCE CURRENT SENSOR		CATALOGUE LISTING CSN SERIES MTG-CSN-219		THIS DRAWING IS FOR REFERENCE ONLY.					
CAT. LISTING	ISSUE NO.	OPERATING TEMPERATURE	SUPPLY RANGE	HOUSING MATERIAL	SENSING RANGE NOMINAL	SENSING RANGE MAXIMUM	OUTPUT NOMINAL	MAXIMUM COIL RESISTANCE AT 70°C	NUMBER OF TURNS	SCALE PRINT	
CSNF161	3	-40°C TO +85°C	±12V ±15V	GLASS FILLED P.B.T.	100A	150A	± 100mA	30 Ohms	1000 ± 1	DO NOT SCALE PRINT	
CSNF161-003	3	-40°C TO +85°C	±12V ±15V		100A	150A	± 100mA	30 Ohms	1000 ± 1	MTG-CSN-219	
CSNF161-006	3	-40°C TO +85°C	±12V ±15V		100A	150A	± 100mA	30 Ohms	1000 ± 1	CSN SERIES	
CSNF151	3	-40°C TO +85°C	±12V ±15V		100A	180A	± 50mA	100 Ohms	2000 ± 1	DRAWING NUMBER	
CSNF151-002	3	-40°C TO +85°C	±12V ±15V		100A	180A	± 50mA	100 Ohms	2000 ± 1	4	
CSNR161	3	-40°C TO +85°C	±15V ±15V		125A	200A	± 125mA	30 Ohms	1000 ± 1	ISSUE	
CSNR151	3	-40°C TO +85°C	±15V ±15V		125A	200A	± 62.5mA	100 Ohms	2000 ± 1	4	
										LOGO	



- NOTES:-
1. MOUNTING HOLES 0.90 DIA.
  2. INK COLOUR BLACK.

CATALOGUE LISTING

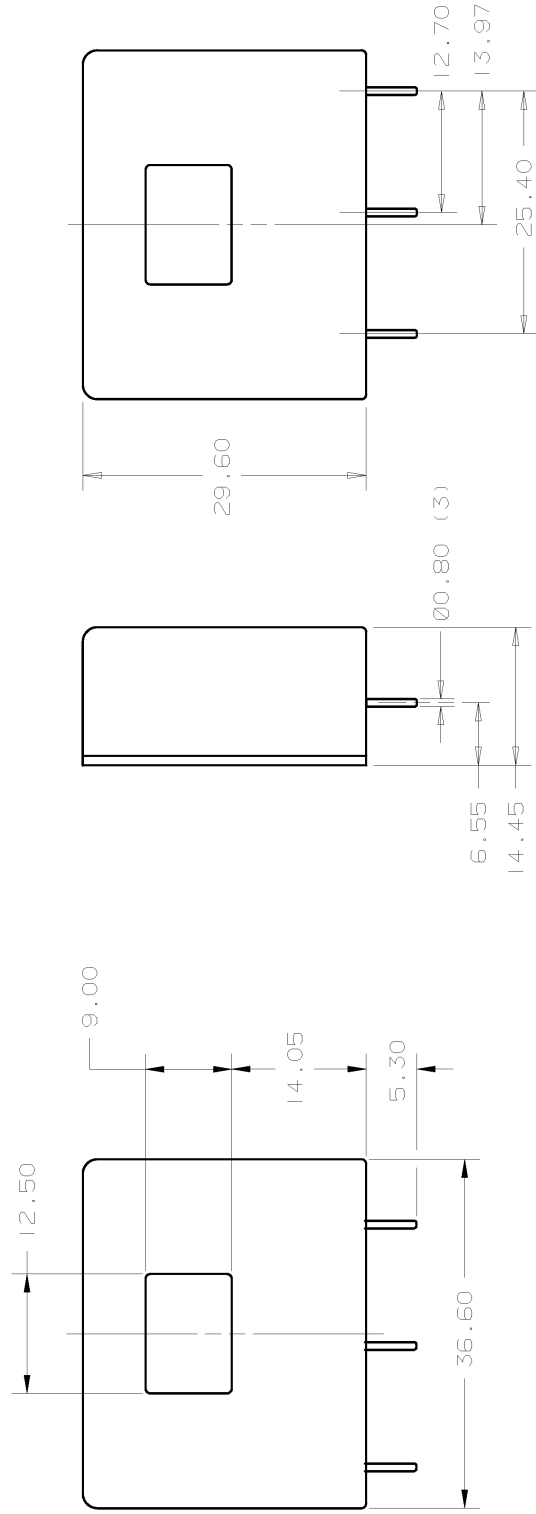

THE COPYRIGHT OF THIS DRAWING IS THE PROPERTY OF HONEYWELL LTD. THE DRAWING IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.

THIRD ANGLE PROJECTION  
SCALE :- 2/1  
DIMENSIONS ARE IN MILLIMETRES  
MODIFY ON CAD3D SYSTEM ONLY

DRAWN W. JOHNSTON 2/97  
CHECK  
DESIGN  
AUTHOR N