




Model #: OMNIVS1500XL

Omni VS UPS System - Line interactive UPS for personal computers and workstations

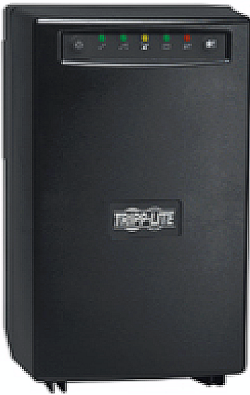

Highlights

- 1500VA / 1.5kVA line interactive, tower UPS with extended runtime capability
- Maintains 120V nominal output over an input range of 75V to 147V
- Workstation optimized features include USB port, single line TEL / DSL or Ethernet line surge suppression and two surge-only outlets
- Input: NEMA 5-15P (120V 15A) / Output: 8 NEMA 5-15R (120V)
- 2 year product warranty

Description

Tripp Lite's OMNIVS1500XL line interactive UPS system offers voltage regulation, surge suppression and long lasting, expandable battery support for personal computers, internetworking equipment and other sensitive electronics. Internal UPS batteries support entry level PC systems for up to 75 minutes during power failures so that connected equipment can be shut down without data loss. Automatic Voltage Regulation (AVR) circuits regulate brownouts as low as 75 and overvoltages up to 147 volts back to usable 120V levels without using battery power. Offers complete desktop power protection in an attractive black tower configuration. Includes 6 battery supported outlets for computer, monitor and vital system peripherals, plus 2 additional surge suppression only outlets for printers and other system accessories not requiring battery support. USB port enables optional unattended system shutdown without data loss in the case of extended power failure (USB cable included).

Built-in data line suppression offers protection for equipment with single line TEL/DSL or network Ethernet connection. Built-in audible alarm and 5 front panel LEDs indicate status of line power, battery power, battery low/replace, voltage regulation and overload. 1500VA power handling ability supports entry-level PCs, network workstations, point-of-sale equipment, small business phone systems, audio/video equipment and home theater systems. Offers 4.5 minutes battery runtime with a full load of 1500VA and 13 minutes with a half load of 750VA. Supports hot-swappable battery replacement via built-in access panel. Extended runtime available with optional BP24V34, BP24V15RT2U, BP24V28-2U, or BP24V70-3U external battery packs.

Applications

Entry-level PCs, networked workstations, point-of-sale equipment, small business phone systems, audio/video equipment and home theater systems. Ideal for sensitive electronic applications in areas where brownout conditions are common.

Package Includes

- OMNIVS1500XL Line Interactive UPS
- USB and telephone cable
- Owner's manual with warranty information

Features

- OMNIVS1500XL Uninterruptible Power Supply offers voltage regulation, surge suppression and long lasting battery support
- Supports entry level PCs up to 75 minutes during blackouts to enable shutdown without data loss
- Regulates brownouts as low as 75V and overvoltages to 147V back to usable 120V nominal levels without using battery power
- 6 UPS battery supported outlets, plus 2 additional surge suppression-only outlets

USB port and cable enables UPS monitoring and unattended shutdown in the case of extended power failure

Data line surge suppression protects standard dialup/DSL or Ethernet line connection

Built-in audible alarm and 5 front panel LEDs indicate status of line power, battery power, battery low/replace, voltage regulation and overload

1500VA power handling ability supports a variety of sensitive electronic equipment

4.5 minutes full load runtime (1500VA), 13 minutes half load runtime (750VA)

Runtime is expandable with the addition of external battery packs ([SEE OPTIONS & ACCESSORIES](#))

Supports hot swappable battery replacement via built-in access panel

2 year warranty

Specifications

| SYSTEM OVERVIEW | |
|--------------------------------|---|
| Voltage compatibility | 120V AC |
| Frequency compatibility | 60Hz |
| OUTPUT | |
| Output VA | 1500 |
| Output watts | 940 |
| Output nominal voltage | 120VAC |
| Output voltage regulation | LINE MODE: Sine wave line voltage 120V (-18% / +8%), BATTERY MODE: PWM sine wave output 120V +/-5% |
| Output frequency regulation | LINE MODE: Passes line frequency of 60Hz +/-10% BATTERY MODE: Inverter output regulated to 60Hz +/-0.5Hz |
| Outlet quantity / type | 8 NEMA 5-15R |
| INPUT | |
| Maximum input amps | 12A |
| Input connection type | NEMA 5-15P |
| Input cord length | 6 ft., 14 gauge |
| Recommended Electrical Service | 15A 120V |
| BATTERY | |
| Full load runtime | 4.5 minutes (1500VA / 940 watts) |
| Half load runtime | 13 minutes (750VA / 470 watts) |
| Expandable battery runtime | Extended runtime available with optional BP24V34, BP24V15RT2U, BP24V28-2U or BP24V70-3U external battery packs |
| DC system voltage | 24VDC |
| Typical battery lifespan | 3-6 years, depending on usage |
| Battery recharge rate | 2-4 hours to 90% |
| Replacement Battery Cartridge | RBC51 (quantity 2) |
| VOLTAGE REGULATION | |
| Voltage regulation description | Automatic Voltage Regulation (AVR) circuits maintain clean, regulated computer-grade 120V nominal output, without using battery power, during brownouts to 75V and overvoltages to 147V |
| Overvoltage correction | Input voltages between 128 and 147VAC are reduced by 12% |
| Direct pass through | Input voltages between 108 and 127VAC are passed on to connected equipment unchanged |
| Brownout correction | Input voltages between 93 and 107VAC are boosted by 14% |

| | |
|--|---|
| Severe brownout correction | Input voltages between 75 and 92VAC are boosted by 30% |
| LEDS ALARMS & SWITCHES | |
| Front panel LEDs | 5 front panel LEDs indicate line power status, battery power status, battery low/replace status and voltage regulation operation |
| Alarms | Audible alarm with 15 second delay sounds to indicate loss of utility power. Alarm can be silenced by pressing front panel alarm cancel button. Once silenced, alarm will re-sound when approximately 2 minutes runtime remain. |
| Switches | Includes 2 front panel switches—one main on/off power switch and one dual function "alarm cancel" / "self test" button |
| SURGE / NOISE SUPPRESSION | |
| AC surge suppression | 510 joules |
| AC suppression response time | Instantaneous |
| Dataline suppression | Tel/DSL/Ethernet |
| EMI / RFI AC noise suppression | Yes |
| PHYSICAL | |
| Shipping weight (lbs) | 30 |
| Shipping weight (kg) | 13.5 |
| Shipping Dimensions (HWD/in) | 15.5 x 11 x 11.25 |
| Shipping Dimensions (HWD/cm) | 39.4 x 28 x 28.6 |
| Unit weight (lbs) | 28 |
| Unit weight (kg) | 12.6 |
| Unit Dimensions (HWD/in) | 11.75 x 7.25 x 7.5 |
| Unit Dimensions (HWD/cm) | 29.8 x 18.4 x 19.1 |
| Material of construction | Polycarbonate |
| Form factors supported | Tower |
| Cooling method | Fan |
| Battery Access | Battery access door allows user replacement of UPS batteries, hot swappable battery replacement supported |
| ENVIRONMENTAL | |
| Operating Temperature | +32 to +104 degrees Fahrenheit / 0 to +40 degrees Celsius |
| Storage Temperature | +5 to +122 degrees Fahrenheit / -15 to +50 degrees Celsius |
| Relative Humidity | 0 to 95%, non-condensing |
| COMMUNICATIONS | |
| Network monitoring port | USB |
| | |
| WatchDog compatibility | Yes, compatible with Tripp Lite's Watchdog system service to restore operation to locked equipment through soft reboot of application / OS or hard power off/on reboot of connected equipment — ideal for unattended kiosk applications |
| LINE / BATTERY TRANSFER | |
| Transfer time from line power to battery mode | 2-4 milliseconds |

| | |
|---|---|
| Low voltage transfer to battery power | Switches to battery power as line voltage decreases to 75 volts or less. Resets back to line power mode as line voltage increases to 79V or higher. |
| High voltage transfer to battery power | Switches to battery power as line voltage increases to 147 volts or higher. Resets back to line power mode as line voltage decreases to 143V or less. |
| SPECIAL FEATURES | |
| Cold Start | Yes, inverter can be "cold started" to enable temporary AC output during a power failure |
| Appearance | Attractive black tower UPS |
| BATTERY PACK ACCESSORY (optional) | |
| Battery Pack Accessory (optional) | BP24V34, BP24V15RT2U, BP24V28-2U (Limit one on packs), BP24V70-3U (multi-pack compatible) |
| CERTIFICATIONS | |
| Certifications | Tested to UL1778 (USA), CSA (Canada), NOM (Mexico), FCC Class B (Emissions) |
| WARRANTY | |
| Product warranty | 2 year product warranty |
| Optional coverage | 3-5 year warranties, plus next day and on-site warranty coverage available. Contact Tripp Lite for additional information. |

Related Items

| | | |
|-------------------------------|---|-----------------|
| Extended Warranties | | |
| WEXT3-OMNI | 3-Year Extended Warranty - For OmniSmart, OmniPro, OmniVS | Qty: [optional] |
| WEXT5-OMNI | 5-Year Extended Warranty - For OmniSmart, OmniPro, OmniVS | Qty: [optional] |
| External Battery Packs | | |
| BP24V28-2U | BP24V28-2U - External Battery Pack for UPS System | Qty: [optional] |
| BP24V70-3U | BP24V70-3U - External Battery Pack for UPS System | Qty: [optional] |
| BP24V15RT2U | BP24V15RT2U - External Battery Pack for UPS System | Qty: [optional] |
| Software | | |
| WATCHDOGSW | WatchDog Service Monitoring / Reboot Software | Qty: [optional] |
| Surge Protectors | | |
| DTEL2 | Network Surge Suppressor - Essential protection for data and communication lines | Qty: [optional] |
| DNET1 | Network Surge Suppressor - Essential protection for data and communication lines | Qty: [optional] |
| DCATV | Network Surge Suppressor - Essential protection for TV/VCR coaxial lines | Qty: [optional] |
| USB Hubs/Accessories | | |
| U022-010 | USB Cable - 10-ft. USB 2.0 AB Gold Device Cable | Qty: [optional] |
| Wallmount Bracket | | |
| UPSWM | Wallmount Bracket and installation accessories (4 washers, 4 screws, 1 Velcro safety strap) | Qty: [optional] |