

### VPS 12 - 14000

#### Electrical Specifications (@25C)

1. Maximum Power: 175.0VA
2. Secondary: Series: 12.6V CT@ 14.0A  
Parallel: 6.3V @ 28.0A
3. Voltage Regulation: 25% TYP @ full load to no load
4. Temperature Rise: 30C TYP (45C MAX allowed)
5. Insulation Resistance: 100MΩ

#### Construction:

Dual bobbin construction with an insulated shroud, both made of a high temperature material that exceeds UL flammability requirements.

#### Safety:

These units are designed with 4000VAC isolation between the primary and secondary, and also, between each winding and the core. Since the dual bobbin construction effectively reduces capacitance, electrostatic shielding is not required. World Series Transformers are designed and manufactured to meet the following agency approvals:



#### Agency File:

UL: File E53148, UL 506, General Purpose.  
CSA: File LR 37220. C22.2 NO. 66, General Purpose.  
VDE: File 18786-3390-0001, VDE/EN 60 950, (IEC950) information Technology Equipment.

#### A. Dimensions:





Unit: In inches

| H     | W     | D       | A | B     | C   | T   | MW    | ML    |
|-------|-------|---------|---|-------|-----|-----|-------|-------|
| 3-3/4 | 3-1/8 | 2-13/16 | - | 1-5/8 | 3/8 | 1/4 | 2-1/2 | 2-1/2 |

B. Mounting Hole Size: 13/64"X3/8"

C. WT Lbs. : 5.5

D. Schematic Diagram:

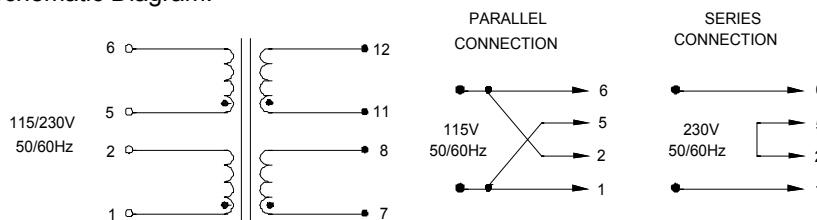

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

# Power Transformers

VDE File: 18786-3390-0001

Class B

UL File: E53148

CSA File: 221330



## Chassis Mount: Quick-Connect World Series™

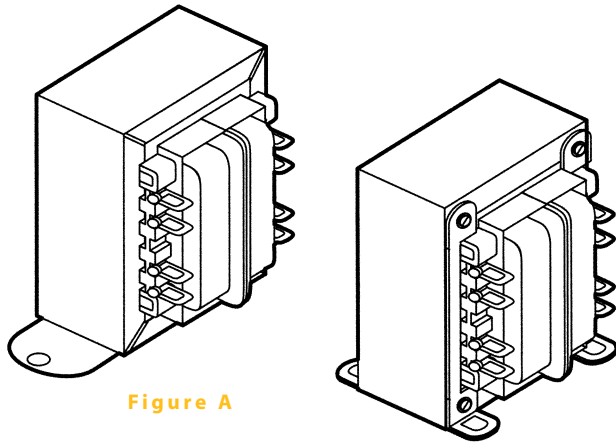


Figure A

Figure B

### :: Description

Triad chassis mount World Series transformers are designed to meet U.S. and International standards including CSA, IEC, VDE and UL requirements. The transformers consist of a dual bobbin design positioned inside an insulating shroud and constructed with UL approved high temperature material. This design eliminates the need for electrostatic shielding since there is minimal capacitance between coils when using a dual bobbin configuration. The primary and secondary are both electrically isolated from each other, and from the core itself. Chassis mount World Series transformers are available in sizes ranging from 25 VA to 175 VA, and are equipped with convenient “quick connect” terminations.

### :: Specifications

Primary: 115/230 V, 50/60 Hz

### :: World Series

| Section | Type No.    | VA  | Secondary         |                | Dimensions                     |                                |                                |                                |                               |                                |                                | Mounting |                                | Wt. Lbs.                      |      |
|---------|-------------|-----|-------------------|----------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------------------|--------------------------------|--------------------------------|----------|--------------------------------|-------------------------------|------|
|         |             |     | Series            | Parallel       | H                              | W                              | D                              | A                              | B                             | C                              | T                              | Figure   | MW                             |                               | ML   |
| A       | VPS10-2500  | 25  | 10.0V CT @ 2.5A   | 5.0V @ 5.0A    | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS10-4300  | 43  | 10.0V CT @ 4.3A   | 5.0V @ 8.6A    | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS10-8000  | 80  | 10.0V CT @ 8.0A   | 5.0V @ 16.0A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS10-13000 | 130 | 10.0V CT @ 13.0A  | 5.0V @ 26.0A   | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS10-17500 | 175 | 10.0V CT @ 17.5A  | 5.0V @ 35.0A   | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| B       | VPS12-2000  | 25  | 12.6V CT @ 2.0A   | 6.3V @ 4.0A    | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS12-3400  | 43  | 12.6V CT @ 3.4A   | 6.3V @ 6.8A    | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS12-6300  | 80  | 12.6V CT @ 6.3A   | 6.3V @ 12.6A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS12-10300 | 130 | 12.6V CT @ 10.3A  | 6.3V @ 20.6A   | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS12-14000 | 175 | 12.6V CT @ 14.0A  | 6.3V @ 28.0A   | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| C       | VPS16-1600  | 25  | 16.0V CT @ 1.6A   | 8.0V @ 3.2A    | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS16-2700  | 43  | 16.0V CT @ 2.7A   | 8.0V @ 5.4A    | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS16-5000  | 80  | 16.0V CT @ 5.0A   | 8.0V @ 10.0A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS16-8100  | 130 | 16.0V CT @ 8.1A   | 8.0V @ 16.2A   | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS16-11000 | 175 | 16.0V CT @ 11.0A  | 8.0V @ 22.0A   | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| D       | VPS20-1250  | 25  | 20.0V CT @ 1.25A  | 10.0V @ 2.5A   | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS20-2200  | 43  | 20.0V CT @ 2.2A   | 10.0V @ 4.4A   | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS20-4000  | 80  | 20.0V CT @ 4.0A   | 10.0V @ 8.0A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS20-6500  | 130 | 20.0V CT @ 6.5A   | 10.0V @ 13.0A  | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS20-8800  | 175 | 20.0V CT @ 8.8A   | 10.0V @ 17.6A  | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| E       | VPS24-1000  | 25  | 24.0V CT @ 1.0A   | 12.0V @ 2.0A   | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS24-1800  | 43  | 24.0V CT @ 1.8A   | 12.0V @ 3.6A   | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS24-3300  | 80  | 24.0V CT @ 3.3A   | 12.0V @ 6.6A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS24-5400  | 130 | 24.0V CT @ 5.4A   | 12.0V @ 10.8A  | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS24-7300  | 175 | 24.0V CT @ 7.3A   | 12.0V @ 14.6A  | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| F       | VPS28-900   | 25  | 28.0V CT @ 0.9A   | 14.0V @ 1.8A   | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS28-1500  | 43  | 28.0V CT @ 1.5A   | 14.0V @ 3.0A   | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS28-2800  | 80  | 28.0V CT @ 2.8A   | 14.0V @ 5.6A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS28-4600  | 130 | 28.0V CT @ 4.6A   | 14.0V @ 9.2A   | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS28-6250  | 175 | 28.0V CT @ 6.25A  | 14.0V @ 12.5A  | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| G       | VPS36-700   | 25  | 36.0V CT @ 0.7A   | 18.0V @ 1.4A   | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS36-1200  | 43  | 36.0V CT @ 1.2A   | 18.0V @ 2.4A   | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS36-2200  | 80  | 36.0V CT @ 2.2A   | 18.0V @ 4.4A   | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS36-3600  | 130 | 36.0V CT @ 3.6A   | 18.0V @ 7.2A   | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS36-4800  | 175 | 36.0V CT @ 4.8A   | 18.0V @ 9.6A   | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |
| H       | VPS56-2300  | 80  | 36.0V CT @ 2.3A   | 28.0V @ 4.6A   | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>16</sub> | 2 <sup>7</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.2  |
| I       | VPS230-110  | 25  | 230.0V CT @ 0.11A | 115.0V @ 0.22A | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>3</sup> / <sub>8</sub>  | •                             | 1.25 |
|         | VPS230-190  | 43  | 230.0V CT @ 0.19A | 115.0V @ 0.38A | 2 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 2                              | 2 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | A        | 2 <sup>1</sup> / <sub>16</sub> | •                             | 1.60 |
|         | VPS230-350  | 80  | 230.0V CT @ 0.35A | 115.0V @ 0.7A  | 3                              | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>16</sub> | B        | 2                              | 2 <sup>1</sup> / <sub>4</sub> | 2.80 |
|         | VPS230-570  | 130 | 230.0V CT @ 0.57A | 115.0V @ 1.14A | 3 <sup>3</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>4</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 4.10 |
|         | VPS230-760  | 175 | 230.0V CT @ 0.76A | 115.0V @ 1.52A | 3 <sup>3</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>16</sub> | •                              | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>8</sub>  | 3 <sup>1</sup> / <sub>4</sub>  | B        | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 5.50 |

CT = Center Tap Mounting Hole Sizes: 25 VA, 43 VA = 3/16" 80 VA, 130 VA, 175 VA = 13/64 x 3/8"

:: Outline Dimensions

**Technical Notes**

1. Hi-pot tested at 4,000 VRMS.
2. Both primary and secondary coils may be connected as either series or parallel, but both must be used simultaneously.





Figure A






Figure B

