

# LM4250

## Programmable Operational Amplifier

### General Description

The LM4250 and LM4250C are extremely versatile programmable monolithic operational amplifiers. A single external master bias current setting resistor programs the input bias current, input offset current, quiescent power consumption, slew rate, input noise, and the gain-bandwidth product. The device is a truly general purpose operational amplifier.


The LM4250C is identical to the LM4250 except that the LM4250C has its performance guaranteed over a 0°C to +70°C temperature range instead of the -55°C to +125°C temperature range of the LM4250.

### Features

- ±1V to ±18V power supply operation
- 3 nA input offset current
- Standby power consumption as low as 500 nW
- No frequency compensation required
- Programmable electrical characteristics
- Offset voltage nulling capability
- Can be powered by two flashlight batteries
- Short circuit protection


### Connection Diagrams

Metal Can Package

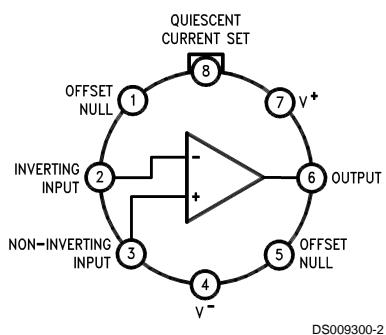


Top View

Dual-In-Line Package

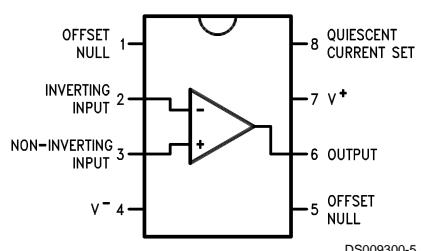


Top View

X5 Difference Amplifier



Quiescent  $P_D = 0.6$  mW

500 Nano-Watt X10 Amplifier



Quiescent  $P_D = 500$  nW

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

(Note 3)

	LM4250	LM4250C
Supply Voltage	±18V	±18V
Operating Temp. Range	$-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$	$0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$
Differential Input Voltage	±30V	±30V
Input Voltage (Note 2)	±15V	±15V
$I_{SET}$ Current	150 nA	150 nA
Output Short Circuit Duration	Continuous	Continuous
$T_{JMAX}$		
H-Package	150°C	100°C
N-Package		100°C
J-Package	150°C	100°C
M-Package		100°C
Power Dissipation at $T_A = 25^{\circ}\text{C}$		
H-Package (Still Air) (400 LF/Min Air Flow)	500 mW 1200 mW	300 mW 1200 mW
N-Package		500 mW
J-Package	1000 mW	600 mW
M-Package		350 mW
Thermal Resistance (Typical) $\theta_{JA}$		
H-Package (Still Air) (400 LF/Min Air Flow)	165°C/W 65°C/W	165°C/W 65°C/W
N-Package		130°C/W
J-Package	108°C/W	108°C/W
M-Package		190°C/W
(Typical) $\theta_{JC}$		
H-Package	21°C/W	21°C/W
Storage Temperature Range	$-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$	$-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$
Soldering Information		
Dual-In-Line Package		
Soldering (10 seconds)	260°C	
Small Outline Package		
Vapor Phase (60 seconds)	215°C	
Infrared (15 seconds)	220°C	
See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.		
ESD tolerance (Note 4)	800V	
<b>Note 1:</b> "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.		
<b>Note 2:</b> For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.		
<b>Note 3:</b> Refer to RETS4250X for military specifications.		
<b>Note 4:</b> Human body model, 1.5 kΩ in series with 100 pF.		

## Resistor Biasing

### Set Current Setting Resistor to V<sup>-</sup>

<b>I<sub>SET</sub></b>					
<b>V<sub>S</sub></b>	<b>0.1 μA</b>	<b>0.5 μA</b>	<b>1.0 μA</b>	<b>5 μA</b>	<b>10 μA</b>
±1.5V	25.6 MΩ	5.04 MΩ	2.5 MΩ	492 kΩ	244 kΩ
±3.0V	55.6 MΩ	11.0 MΩ	5.5 MΩ	1.09 MΩ	544 kΩ
±6.0V	116 MΩ	23.0 MΩ	11.5 MΩ	2.29 MΩ	1.14 MΩ
±9.0V	176 MΩ	35.0 MΩ	17.5 MΩ	3.49 MΩ	1.74 MΩ
±12.0V	236 MΩ	47.0 MΩ	23.5 MΩ	4.69 MΩ	2.34 MΩ
±15.0V	296 MΩ	59.0 MΩ	29.5 MΩ	5.89 MΩ	2.94 MΩ

## Electrical Characteristics

LM4250 ( $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  unless otherwise specified.)  $T_A = T_J$

Parameter	Conditions	<b>V<sub>S</sub> = ±1.5V</b>			
		<b>I<sub>SET</sub> = 1 μA</b>		<b>I<sub>SET</sub> = 10 μA</b>	
		<b>Min</b>	<b>Max</b>	<b>Min</b>	<b>Max</b>
V <sub>OS</sub>	R <sub>S</sub> ≤ 100 kΩ, T <sub>A</sub> = 25°C		3 mV		5 mV
I <sub>OS</sub>	T <sub>A</sub> = 25°C		3 nA		10 nA
I <sub>bias</sub>	T <sub>A</sub> = 25°C		7.5 nA		50 nA
Large Signal Voltage Gain	R <sub>L</sub> = 100 kΩ, T <sub>A</sub> = 25°C V <sub>O</sub> = ±0.6V, R <sub>L</sub> = 10 kΩ	40k		50k	
Supply Current	T <sub>A</sub> = 25°C		7.5 μA		80 μA
Power Consumption	T <sub>A</sub> = 25°C		23 μW		240 μW
V <sub>OS</sub>	R <sub>S</sub> ≤ 100 kΩ		4 mV		6 mV
I <sub>OS</sub>	T <sub>A</sub> = +125°C T <sub>A</sub> = -55°C		5 nA		10 nA
I <sub>bias</sub>			3 nA		10 nA
Input Voltage Range		±0.6V		±0.6V	
Large Signal Voltage Gain	V <sub>O</sub> = ±0.5V, R <sub>L</sub> = 100 kΩ R <sub>L</sub> = 10 kΩ	30k		30k	
Output Voltage Swing	R <sub>L</sub> = 100 kΩ R <sub>L</sub> = 10 kΩ	±0.6V		±0.6V	
Common Mode Rejection Ratio	R <sub>S</sub> ≤ 10 kΩ	70 dB		70 dB	
Supply Voltage Rejection Ratio	R <sub>S</sub> ≤ 10 kΩ	76 dB		76 dB	
Supply Current			8 μA		90 μA
Parameter	Conditions	<b>V<sub>S</sub> = ±15V</b>			
		<b>I<sub>SET</sub> = 1 μA</b>		<b>I<sub>SET</sub> = 10 μA</b>	
		<b>Min</b>	<b>Max</b>	<b>Min</b>	<b>Max</b>
V <sub>OS</sub>	R <sub>S</sub> ≤ 100 kΩ, T <sub>A</sub> = 25°C		3 mV		5 mV
I <sub>OS</sub>	T <sub>A</sub> = 25°C		3 nA		10 nA
I <sub>bias</sub>	T <sub>A</sub> = 25°C		7.5 nA		50 nA
Large Signal Voltage Gain	R <sub>L</sub> = 100 kΩ, T <sub>A</sub> = 25°C V <sub>O</sub> = ±10V, R <sub>L</sub> = 10 kΩ	100k		100k	
Supply Current	T <sub>A</sub> = 25°C		10 μA		90 μA
Power Consumption	T <sub>A</sub> = 25°C		300 μW		2.7 mW
V <sub>OS</sub>	R <sub>S</sub> ≤ 100 kΩ		4 mV		6 mV
I <sub>OS</sub>	T <sub>A</sub> = +125°C T <sub>A</sub> = -55°C		25 nA		25 nA
I <sub>bias</sub>			3 nA		10 nA
Input Voltage Range		±13.5V		±13.5V	

## Electrical Characteristics (Continued)

Parameter	Conditions	$V_S = \pm 15V$			
		$I_{SET} = 1 \mu A$		$I_{SET} = 10 \mu A$	
		Min	Max	Min	Max
Large Signal Voltage Gain	$V_O = \pm 10V, R_L = 100 k\Omega$ $R_L = 10 k\Omega$	50k		50k	
Output Voltage Swing	$R_L = 100 k\Omega$ $R_L = 10 k\Omega$	$\pm 12V$		$\pm 12V$	
Common Mode Rejection Ratio	$R_S \leq 10 k\Omega$	70 dB		70 dB	
Supply Voltage Rejection Ratio	$R_S \leq 10 k\Omega$	76 dB		76 dB	
Supply Current			11 $\mu A$		100 $\mu A$
Power Consumption			330 $\mu W$		3 mW

## Electrical Characteristics

LM4250C ( $0^\circ C \leq T_A \leq +70^\circ C$  unless otherwise specified.)  $T_A = T_J$


Parameter	Conditions	$V_S = \pm 1.5V$			
		$I_{SET} = 1 \mu A$		$I_{SET} = 10 \mu A$	
		Min	Max	Min	Max
$V_{OS}$	$R_S \leq 100 k\Omega, T_A = 25^\circ C$		5 mV		6 mV
$I_{OS}$	$T_A = 25^\circ C$		6 nA		20 nA
$I_{bias}$	$T_A = 25^\circ C$		10 nA		75 nA
Large Signal Voltage Gain	$R_L = 100 k\Omega, T_A = 25^\circ C$ $V_O = \pm 0.6V, R_L = 10 k\Omega$	25k		25k	
Supply Current	$T_A = 25^\circ C$		8 $\mu A$		90 $\mu A$
Power Consumption	$T_A = 25^\circ C$		24 $\mu W$		270 $\mu W$
$V_{OS}$	$R_S \leq 10 k\Omega$		6.5 mV		7.5 mV
$I_{OS}$			8 nA		25 nA
$I_{bias}$			10 nA		80 nA
Input Voltage Range		$\pm 0.6V$		$\pm 0.6V$	
Large Signal Voltage Gain	$V_O = \pm 0.5V, R_L = 100 k\Omega$ $R_L = 10 k\Omega$	25k		25k	
Output Voltage Swing	$R_L = 100 k\Omega$ $R_L = 10 k\Omega$	$\pm 0.6V$		$\pm 0.6V$	
Common Mode Rejection Ratio	$R_S \leq 10 k\Omega$	70 dB		70 dB	
Supply Voltage Rejection Ratio	$R_S \leq 10 k\Omega$	74 dB		74 dB	
Supply Current			8 $\mu A$		90 $\mu A$
Power Consumption			24 $\mu W$		270 $\mu W$
Parameter	Conditions	$V_S = \pm 15V$			
		$I_{SET} = 1 \mu A$		$I_{SET} = 10 \mu A$	
		Min	Max	Min	Max
$V_{OS}$	$R_S \leq 100 k\Omega, T_A = 25^\circ C$		5 mV		6 mV
$I_{OS}$	$T_A = 25^\circ C$		6 nA		20 nA
$I_{bias}$	$T_A = 25^\circ C$		10 nA		75 nA
Large Signal Voltage Gain	$R_L = 100 k\Omega, T_A = 25^\circ C$ $V_O = \pm 10V, R_L = 10 k\Omega$	60k		60k	
Supply Current	$T_A = 25^\circ C$		11 $\mu A$		100 $\mu A$
Power Consumption	$T_A = 25^\circ C$		330 $\mu W$		3 mW
$V_{OS}$	$R_S \leq 100 k\Omega$		6.5 mV		7.5 mV
$I_{OS}$			8 nA		25 nA
$I_{bias}$			10 nA		80 nA

## Electrical Characteristics (Continued)


Parameter	Conditions	$V_S = \pm 15V$			
		$I_{SET} = 1 \mu A$		$I_{SET} = 10 \mu A$	
		Min	Max	Min	Max
Input Voltage Range		$\pm 13.5V$		$\pm 13.5V$	
Large Signal Voltage Gain	$V_O = \pm 10V, R_L = 100 k\Omega$ $R_L = 10 k\Omega$	50k		50k	
Output Voltage Swing	$R_L = 100 k\Omega$ $R_L = 10 k\Omega$	$\pm 12V$		$\pm 12V$	
Common Mode Rejection Ratio	$R_S \leq 10 k\Omega$	70 dB		70 dB	
Supply Voltage Rejection Ratio	$R_S \leq 10 k\Omega$	74 dB		74 dB	
Supply Current			11 $\mu A$		100 $\mu A$
Power Consumption			330 $\mu W$		3 mW

## Typical Performance Characteristics


**Input Bias Current vs  $I_{SET}$**

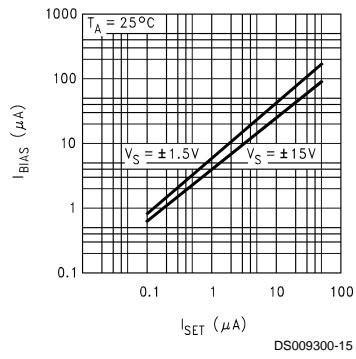


**Input Bias Current vs Temperature**

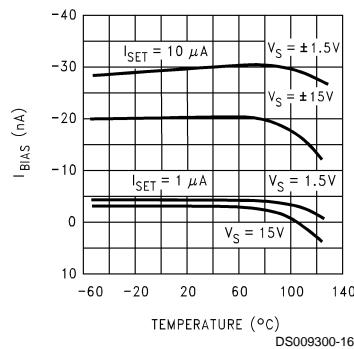


**Input Offset Current vs Temperature**

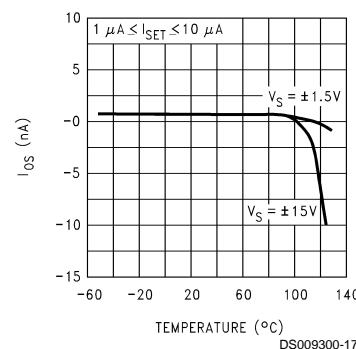


**Unnulled Input Offset Voltage Change vs  $I_{SET}$**

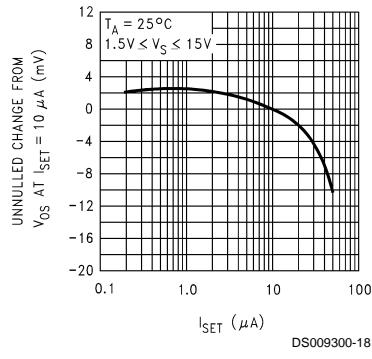


**Unnulled Input Offset Voltage Change vs Temperature**

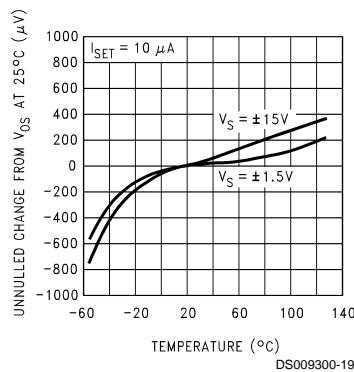

**Peak to Peak Output Voltage Swing vs Load Resistance**

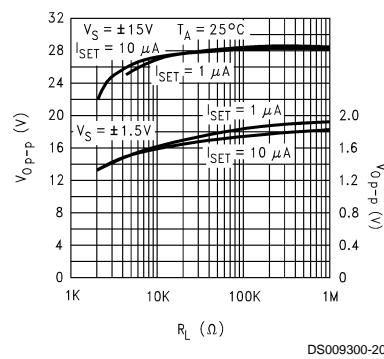


## Schematic Diagram

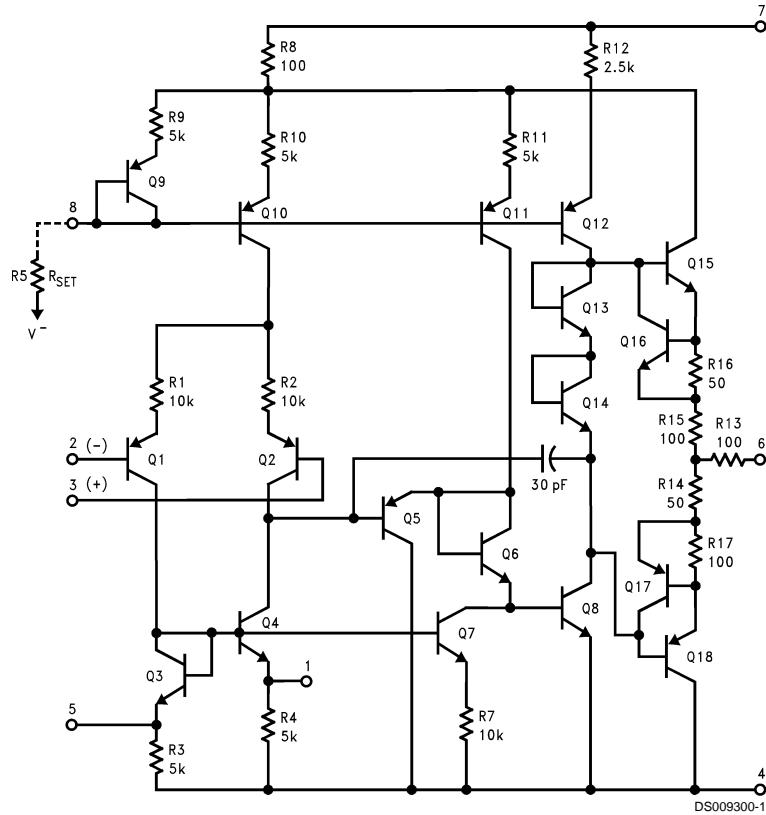


## Ordering Information

Temperature Range		Package	NSC Package Number
Military	Commercial		
$-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$	$0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$	LM4250CN	N08E
	LM4250CM LM4250CMX	8-Pin Molded DIP	M08A
LM4250J-MIL		8-Pin Ceramic DIP	J08E
	LM4250CH	8-Pin Metal Can	H08C

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

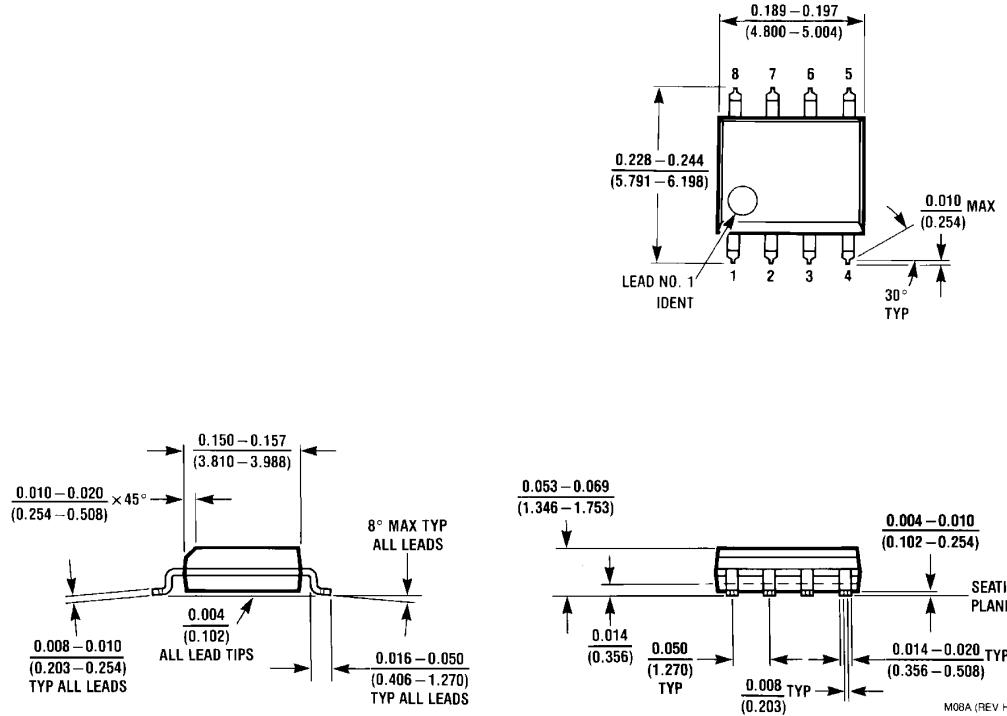

**Small Outline Package (M)**  
Order Number LM4250CM or LM4250CMX  
NS Package Number M08A

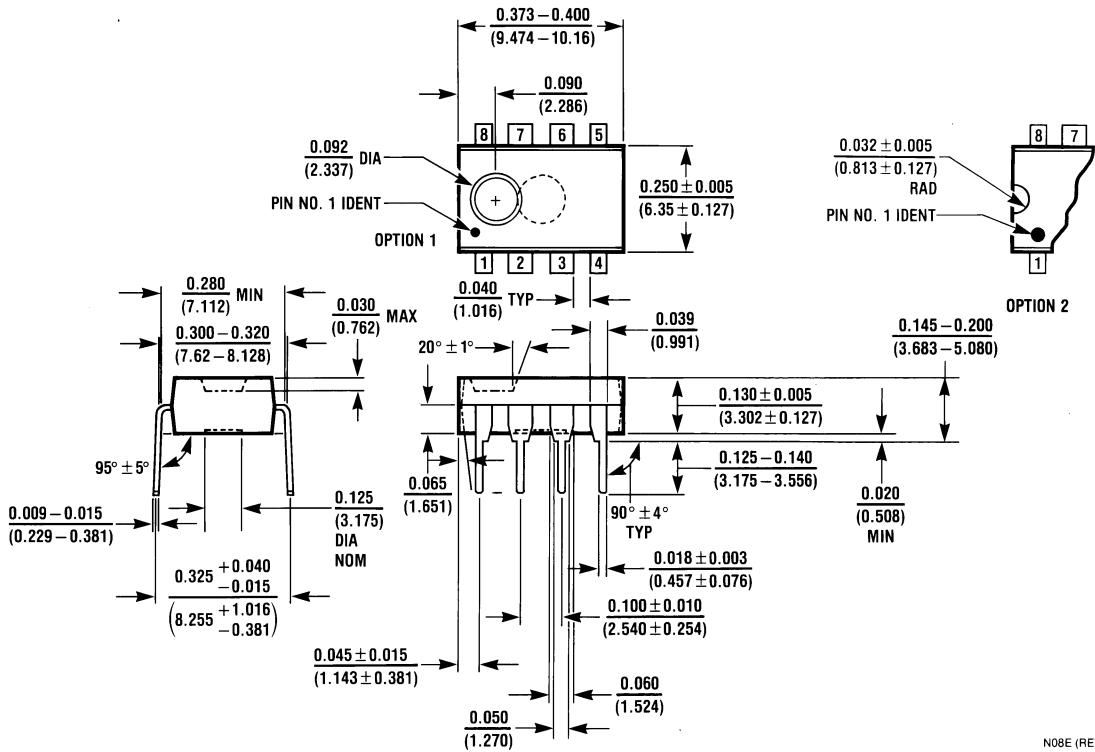

**Molded Dual-In-Line Package (N)**  
Order Number LM4250CN  
NS Package Number N08E