

SCALE DRAWING 1:1


LFB090050-000

IMPEDANCE (Z) NET ^{SEE NOTE 1}

FREQUENCY	500 KHz	1 MHz	5 MHz
NOMINAL (REF.) 1 TURN	12 Ω	21 Ω	36 Ω
MINIMUM (SPEC.) 1 TURN	- Ω	17 Ω	- Ω
NOMINAL (REF.) 2 TURNS	58 Ω	90 Ω	140 Ω
NOMINAL (REF.) 3 TURNS	132 Ω	200 Ω	320 Ω

TEST CRITERIA


METER HP4396A OR EQUIVALENT
 FIXTURE HP16092A OR EQUIVALENT



DETAIL "A"
CHAMFER
SCALE=5:1

SEE DETAIL "A"

SECTION A-A
Z vs. FREQUENCY
1 TURN, 2, AND 3 TURNS
(REF. ONLY)

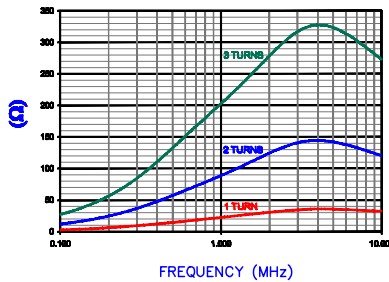

AGILENT E4991A RF Impedance/Material Analyzer
HP 16092A Test Fixture REF# 2512

UNCONTROLLED DOCUMENT

NOTES:

- NET IMPEDANCE IS IMPEDANCE OF THE FERRITE CORE ONLY. ALL IMPEDANCE CONTRIBUTION FROM TEST WIRE AND FIXTURES HAS BEEN REMOVED.

FERRITE CORE DIMENSIONS (SPEC):

A	9.00 [.354]	±	0.25 [.010]
B	5.00 [.197]	±	0.25 [.010]
C	7.00 [.275]	±	0.18 [.007]

WEIGHT/1000 1.04 kgs [2.29 Lbs]

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
D	UPDATE COMPANY LOGO	07/09/08	TMB	PROJECT/PART NUMBER:	LFB090050-000
C	REMOVE MIN SPEC @ 500 KHz	02/10/06	TMB	REV	D
B	UPDATE TOLS. ON DIMENSIONS A,B&C ADD TEST REF TO CURVE	12/22/04	JRK	PART TYPE:	FERRITE CORE
A	ORIGINAL DRAFT	08/27/02	TMB	DATE:	08/27/02
REV	DESCRIPTION	DATE	INT	CAD #	LFB090050-000-D
				SCALE:	5:1
				TOOL #	B0354
				MATERIAL:	LF
				DRAWN BY:	TMB

