SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, #8 TUV APPROVED: EN60950

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP/55°C, 80 VDC

LINE FREQUENCY: DC
MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: N/A mA @ 120V 60Hz N/A mA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +55°C @ RATED CURRENT, I_r . IN AN AMBIENT, I_0 , HIGHER THAN 55°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_r - \sqrt{\frac{85 - T_0}{1}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES I_r FOR 8 SECONDS

TEST SPECIFICATIONS:

INDUCTANCE: 0.451mHNDMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

CATALOG # 15DCF10

APPRVD. DDMMMYY

11MARO3

EC#

0631-0093-03

LINE TO GROUND: 0.093 µF ±20% LINE TO LINE: 2.024 µF ±20%

DISCHARGE RESISTOR: 0.165Mn L/G AND L/L I.R.


ND DISCHARGE RESISTOR: 6000M (MIN.) @ 100VDC, 20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

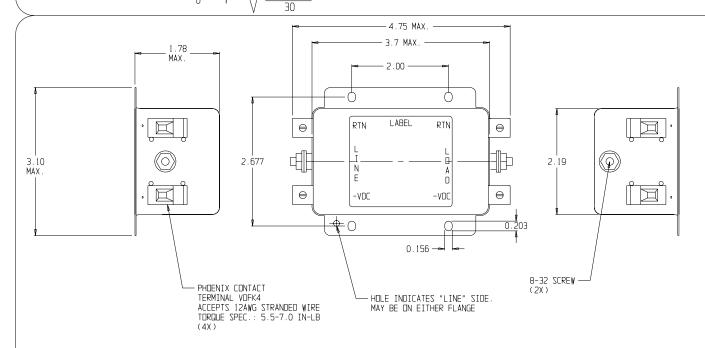

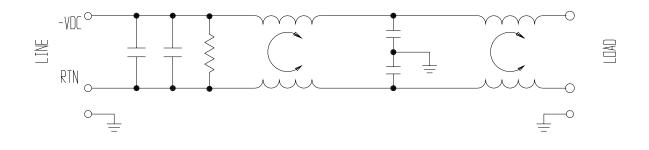

50a-50a(MINIMUM) INSERTION LOSS											
FREQUENCY MHz	. 01	. 05	0.1	. 15	0.5	1	3	5	10	30	
COMMON dB		1	12	20	41	45	61	63	47	39	
DIFF. dB	7	22	27	30	30	36	56	49	38	31	

THIRD ANGLE PROJECTION UNLESS OTHERWISE SPECIFIED,

UNLESS OTHERWISE SPECIFIED, TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED

This document is proprietory to CORCOM INC and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S prior written consent.



POWER LINE FILTER

-	CAD FILE: G:	\CD\15DCF1004	TYCO # 1-1609074-1	
	SCALE: NITS	DATE:	CATALOG NO.	REV
	1/1/2	10-06-00	45D (D40	
	DRW. BY:	DRIG:	15DCF10	4
	PJ0	PJ0		