



SAW Components

Data Sheet B3705





SAW Components

B3705

Low Loss Filter

915,00 MHz

Data Sheet


Features

- RF low-loss filter for wireless audio application
- Package for **Surface Mounted Technology (SMT)**
- Hermetically sealed ceramic package
- No Matching network required for operation at 50 Ω

Terminals

- Ni, gold plated


Ceramic package QCC8B

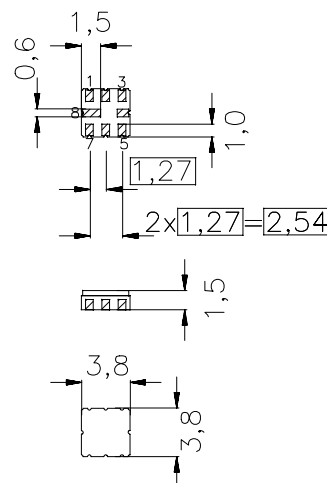

Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 2 Input
- 1,3 Input Ground
- 6 Output
- 5,7 Output Ground
- 4,8 to be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B3705	B39921-B3705-Z810	C61157-A7-A46	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-40/+85	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	-40/+85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_S	0	dBm	source impedance 50 Ω



SAW Components

B3705

Low Loss Filter

915,00 MHz

Data Sheet

Characteristics (Spec. 1)

Reference temperature: $T_A = +5 \dots 65 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	914,70	—	MHz
Maximum insertion attenuation					
	913,90 ... 915,50 MHz α_{\max}	—	4,0	6,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	913,90 ... 915,50 MHz	—	1,0	2,0	dB
Relative attenuation (relative to α_{\max})	α_{rel}				
	10,00 ... 890,00 MHz	43	48	—	dB
	892,30 ... 895,10 MHz	30	35	—	dB
	903,40 ... 904,60 MHz	25	35	—	dB
	955,00 ... 1100,00 MHz	38	45	—	dB
Temperature coefficient of frequency	TC_f	—	−30	—	ppm/K



SAW Components

B3705

Low Loss Filter

915,00 MHz

Data Sheet

Characteristics (Spec. 2)

Reference temperature: $T_A = -40 \dots +85 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ }\Omega$
 Terminating load impedance: $Z_L = 50 \text{ }\Omega$

		min.	typ.	max.	
Center frequency	f_c	—	914,70	—	MHz
Maximum insertion attenuation					
	914,50 ... 916,00 MHz α_{\max}	—	4,0	6,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	914,50 ... 916,00 MHz	—	1,0	2,0	dB
Relative attenuation (relative to α_{\max})	α_{rel}				
	10,00 ... 890,00 MHz	43	48	—	dB
	892,30 ... 895,10 MHz	30	35	—	dB
	955,00 ... 1100,00 MHz	38	45	—	dB
Temperature coefficient of frequency	TC_f	—	-30	—	ppm/K



SAW Components


B3705

Low Loss Filter


915,00 MHz

Data Sheet

Normalized frequency response (Spec.1)

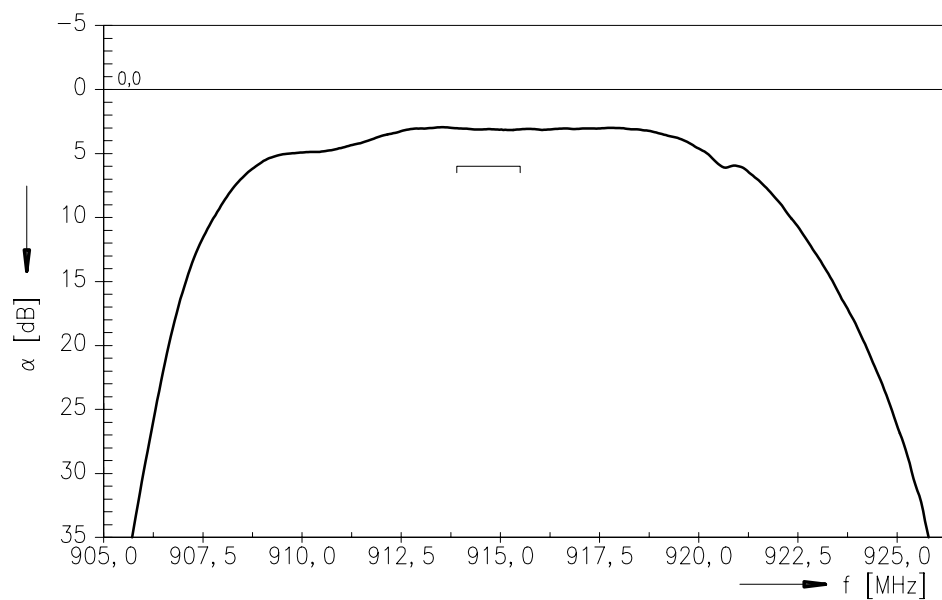

Normalized frequency response (Spec. 1) (wideband)

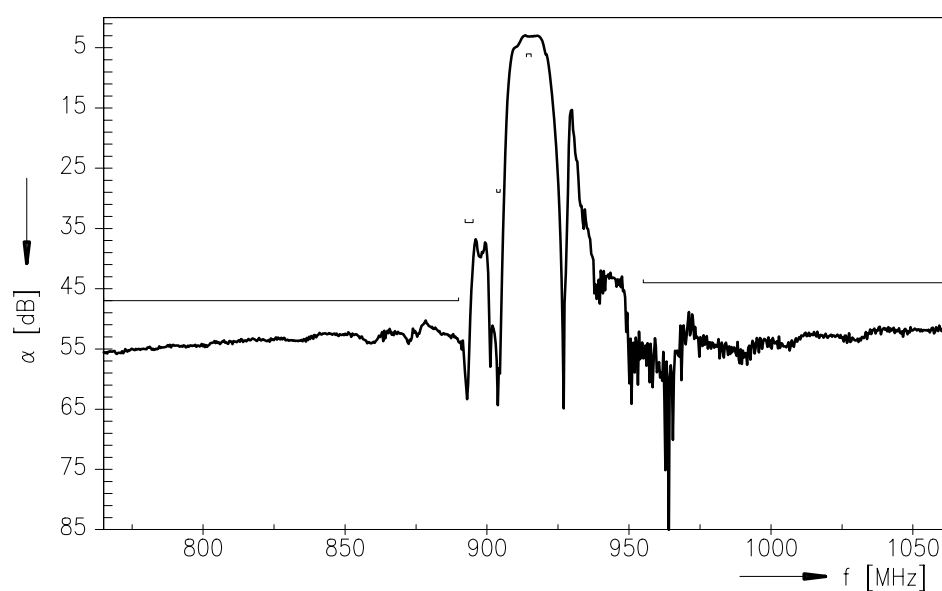



SAW Components

B3705

Low Loss Filter

915,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE AE

P.O. Box 80 17 09, 81617 Munich, GERMANY

©.EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.