




5680F Series T-1 2 High Right Angle Assembly

DESCRIPTION AND FEATURES

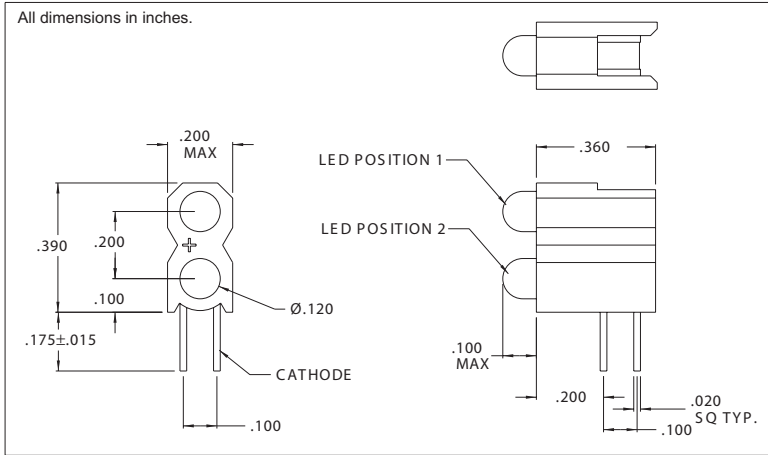

Features:

- 2 T-1 LEDs mounted in single block.
- Less PC board space needed, height and spacing alignment saves assembly cost.
- High Brite and Super Brite LEDs, diffused lens.
- Standoffs prevent flux entrapment.
- Black Nylon plastic block, UL94V-O

Alternate LEDs are also available in this package as a standard variation.

Mounting hole pattern on page 1-X6.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min.(V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
5680F1;1	Red/Red	10.0	10	30	2.0	3.0	5.0	650
5680F3;3	Amber/Amber	7	10	30	2.0	3.0	5.0	603
5680F5;5	Green/Green	16	10	30	2.2	3.0	5.0	562
5680F7;7	Yellow/Yellow	6.3	10	30	2.1	3.0	5.0	585

The model numbers listed above are standard off the shelf parts, for the user who may have a requirement calling for various color/electrical specifications, a part number can be determined by referring to the chart shown below.

Model No. is as follows: 5680F — LED 1 — ; — LED 2 —

LED Color	LED Code	Typical Intensity (mcd)	Rated Current (mA)	Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
Red	1LC	2.5	2.0	7	2.2	2.2	5	650
Green	5LC	2.1	2.0	7	1.8	2.2	5	565
Yellow	7LC	1.8	2.0	7	1.9	2.7	5	583
Red	1-5V	8.0	10.0	20	5.0	7.5	5	655
Amber	3-5V	8.0	10.0	15	5.0	7.5	5	583
Green	5-5V	8.0	10.0	15	5.0	7.5	5	565
Red	1	10	10.0	30	2.0	3.0	5	635
Amber	3	7	10.0	30	2.0	3.0	5	603
Green	5	16	10.0	30	2.2	3.0	5	562
Yellow	7	6.3	10.0	30	2.1	3.0	5	583

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product