



Low Voltage, 0.6 Ω , Dual SPDT Analog Switch

DESCRIPTION

The DG2735/2736 are low voltage, low on-resistance, dual single-pole/double-throw (SPDT) monolithic CMOS analog switches designed for high performance switching of analog signals. Combining low-power, high speed, low on-resistance, and small package size, the DG2735/2736 are ideal for portable and battery power applications.

The DG2735/2736 have an operation range from 1.65 V to 4.3 V single supply. The DG2735 has two separate control pins with for the separated two SPDT switched. The DG2736 has an EN pin. All switches are at high impedance mode when the EN is high.

The DG2735/2736 are guaranteed 1.65 V logic compatible, allowing the easy interface with low voltage DSP or MCU control logic and ideal for one cell Li-ion battery direct power.

The switch conducts signals within power rails equally well in both directions when on, and blocks up to the power supply level when off. Break-before-make is guaranteed.

The DG2735/2736 are built on Vishay Siliconix's sub micron CMOS low voltage process technology and provides greater than 300 mA latch-up protection, as tested per JESD78.

As a committed partner to the community and the environment, Vishay Siliconix manufactures this product with lead (Pb)-free device terminations. DG2735/2736 are offered in a miniQFN package. The miniQFN package has a nickel-palladium-gold device termination and is represented by the lead (Pb)-free "-E4" suffix. The nickel-palladium-gold device terminations meet all JEDEC standards for reflow and MSL ratings.

FEATURES

- Low Voltage Operation (1.65 V to 4.3 V)
- Low On-Resistance r_{ON}: 0.6 Ω at 2.7 V
- Fast Switching: T_{ON} = 55 ns at 2.7 V
- T_{OFF} = 40 ns at 2.7 V
- Latch-Up Current > 300 mA (JESD78)

Pb-free

RoHS


BENEFITS

- Reduced Power Consumption
- · High Accuracy
- · Reduce Board Space
- TTL/1.65 V Logic Compatible

APPLICATIONS

- · Cellular Phones
- Speaker Headset Switching
- · Audio and Video Signal Routing
- PCMCIA Cards
- · Battery Operated Systems
- Portable media player Handheld test instruments

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

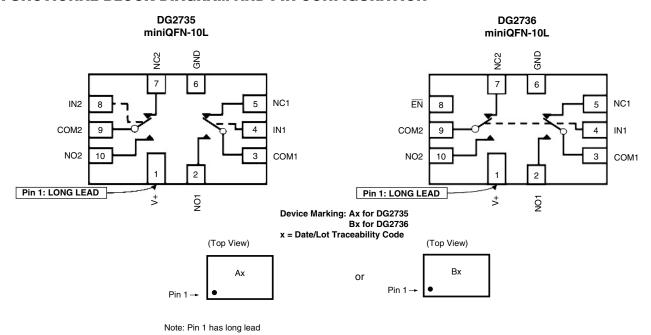

Document Number: 74420 S-70327–Rev. B, 26-Feb-07

Vishay Siliconix



TRUTH TABLE					
Logic	EN (DG2736 only)	NC1, 2	NO1, 2		
0	1	OFF	OFF		
1	1	OFF	OFF		
0	0	ON	OFF		
1	0	OFF	ON		

ORDERING INFORMATION					
Temp Range	Package	Part Number			
- 40 to 85°C	miniQFN10	DG2735DN-T1-E4 DG2736DN-T1-E4			

ABSOLUTE MAXIMUM RATINGS $T_A = 25$ °C, unless otherwise noted					
Parameter		Symbol	Limit	Unit	
Deference to CND	V+		- 0.3 to 5.0	V	
Reference to GND	IN, COM, NC, NO ^a		- 0.3 to (V+ + 0.3)		
Current (Any terminal except NO,	ninal except NO, NC or COM)		30		
Continuous Current (NO, NC, or COM)			± 250	mA	
Peak Current (Pulsed at 1 ms, 10 % duty cycle)			± 500		
Storage Temperature (D Suffix)			- 65 to 150	°C	
Power Dissipation (Packages) ^b	miniQFN10 ^c		208	mW	

- a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- b. All leads welded or soldered to PC Board.
- c. Derate 4.0 mW/C above 70 °C.





Parameter		Test Conditions Unless Otherwise Specified		Limits - 40 to 85 °C			
	Symbol	$V+ = 3 V, \pm 10 \%, V_{IN} = 0.4 V \text{ or } 1.65 V^{e}$	Temp ^a	Min ^b	Typ ^c	Max ^b	Unit
Analog Switch						l	L
Analog Signal Range ^d	V _{analog}	r _{DS(on)}	Full	0		V+	V
		$V+ = 2.7 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 0.5 \text{ V}$	Doom		0.5	0.6	0.6
		$V+ = 2.7 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 1.5 \text{ V}$	Room		0.5	0.6	
		$V + = 2.7 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 0.5 \text{ V}$	Full		0.5		
On Basistanas	_	$V + = 2.7 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 1.5 \text{ V}$			0.5		
On-Resistance	r _{DS(on)}	$V + = 4.3 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 0.9 \text{ V}$	D		0.4	0.5	Ω
		$V + = 4.3 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 2.5 \text{ V}$	Room		0.3	0.5	
		$V + = 4.3 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 0.9 \text{ V}$	- "		0.5		
		$V + = 4.3 \text{ V}, I_{NO/NC} = 100 \text{ mA}, V_{COM} = 2.5 \text{ V}$	Full		0.5		32
		V+ = 2.7 V, I _{NO/NC} = 100 mA,					
r _{ON} Match ^d	Ar	$V_{COM} = 0.5 \text{ V}, 1.5 \text{ V}$	Doom		0.06	0.08	
ION Match	Δr_{ON}	$V+ = 4.3 \text{ V}, I_{NO/NC} = 100 \text{ mA},$	Room				
		$V_{COM} = 0.9 \text{ V}, 2.5 \text{ V}$					
r _{ON} resistance flatness ^d	r _{ON} flatness	$V+ = 2.7 \text{ V, } I_{NO/NC} = 100 \text{ mA},$ $V_{COM} = 0.5 \text{ V, } 1.5 \text{ V}$	Room			0.15	
			Room	- 2		2	nA
Switch Off Leakage	INO/NC(off)	V+ = 4.3 V, V _{NO/NC} = 0.3 V/4.0 V,	Full	- 10		10	
Current		$V_{COM} = 4.0 \text{ V}/0.3 \text{ V}$	Room	- 2		2	
	ICOM(off)		Full	- 10		10	
Channel-On Leakage		V. 42VV V 40V/02V	Room	- 5	- 5 5		
Current	I _{COM(on)}	$V + = 4.3 \text{ V}, V_{NO/NC} = V_{COM} = 4.0 \text{ V}/0.3 \text{ V}$	Full	- 20		20	
Digital Control							
Input High Voltage	V _{INH}		Full	1.65			V
Input Low Voltage	V _{INL}		Full			0.4	V
Input Capacitance	C _{IN}		Full		6		pF
Input Current	I _{INL} or I _{INH}	$V_{IN} = 0$ or $V+$	Full	- 1		1	μΑ
Dynamic Characteristics							
Break-Before-Make Time ^e	t _{BBM}		Room	1	5		
Turn-On Time ^e	t		Room		50	78	
Turr-Ori Time	t _{ON}		Full			80	
Turn-Off Time ^e	t	V: -26VV V -15VP -500	Room	om	35	58	
Turri-Oir Tillie	t _{OFF}	$V+ = 3.6 \text{ V}, V_{NO}, V_{NC} = 1.5 \text{ V}, R_L = 50 \Omega,$ $C_L = 35 \text{ pF}$	Full			60	ns
Enable Turn-On Time ^e	t	ο <u>Γ</u> = 00 βι	Room		50	78	
DG2736 (EN) Enable Turn-Off Time ^e	t _{ON(EN)}	Room	Full			80	
	torri		Room		35	58	
DG2736 (EN)	^t OFF(EN)		Full			60	
Off-Isolation ^d	O _{IRR}	$R_L = 50 \Omega$, $C_L = 5 pF$, $f = 100 kHz$	Room		- 70		dB
Crosstalk ^d	X _{TALK}		1100111		- 70		
3dB bandwith ^d		$R_L = 50 \Omega$, $C_L = 5 pF$	Room		50		MHz
NO, NC Off Capacitance ^d	C _{NO(off)}				55		pF
110, 110 On Oapaonanoe	C _{NC(off)}	V _{IN} = 0 V, or V+, f = 1 MHz			55		
Channel On Capacitanced	C _{NO(on)}				130		
Charmer On Capacitance	C _{NC(on)}			130			

DG2735/DG2736

Vishay Siliconix



SPECIFICATIONS (V+ = 3 V)								
		Test Conditions Unless Otherwise Specified		Limits - 40 to 85 °C				
Parameter	Symbol	$V+ = 3 V$, $\pm 10 \%$, $V_{IN} = 0.4 V$ or 1.65 V^e	Temp ^a	Min ^b	Typ ^c	Max ^b	Unit	
Power Supply								
Power Supply Range	V+			1.65		4.3	V	
Power Supply Current	l+	$V_{IN} = 0$ or $V+$	Full			1.0	μΑ	


Notes:

- a. Room = 25 $^{\circ}\text{C}$, Full = as determined by the operating suffix.
- b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- c. Typical values are for design aid only, not guaranteed nor subject to production testing.
- d. Guarantee by design, not subjected to production test.
- e. V_{IN} = input voltage to perform proper function.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




TYPICAL CHARACTERISTICS $T_A = 25$ °C, unless otherwise noted




 $r_{\mbox{\scriptsize ON}}$ vs. $V_{\mbox{\scriptsize COM}}$ and Supply Voltage




r_{ON} vs. Analog Voltage and Temperature




r_{ON} vs. Analog Voltage and Temperature



r_{ON} vs. Analog Voltage and Temperature



r_{ON} vs. Analog Voltage and Temperature





Supply Current vs. Temperature

Vishay Siliconix


VISHAY.


TYPICAL CHARACTERISTICS $T_A = 25$ °C, unless otherwise noted






Leakage Current vs. Temperature








Leakage vs. Analog Voltage


Insertion Loss, Off-Isolation Crosstalk vs. Frequency




Switching Threshold vs. Supply Voltage



TEST CIRCUITS





$$V_{OUT} = V_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$

Logic "1" = Switch On Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 1. Switching Time


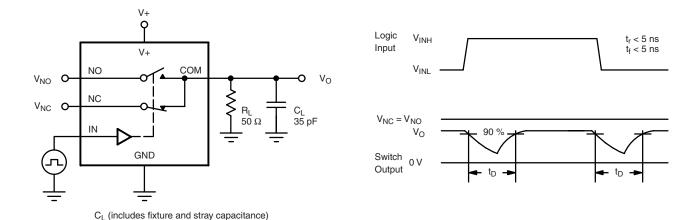



Figure 2. Break-Before-Make Interval

Vishay Siliconix

TEST CIRCUITS




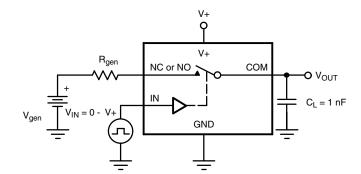



IN depends on switch configuration: input polarity determined by sense of switch.

Figure 3. Charge Injection








Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see http://www.vishay.com/ppg?74420.





Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Revision: 18-Jul-08

Document Number: 91000 www.vishay.com